NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-22885/18G
20 July 1988
SUPERSEDING
MIL-S-22885/18F
1 February 1980

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED, DRIPPROOF SEAL, MOMENTARY AND ALTERNATE ACTION (DPDT/TWO CIRCUIT - 2 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-22885.

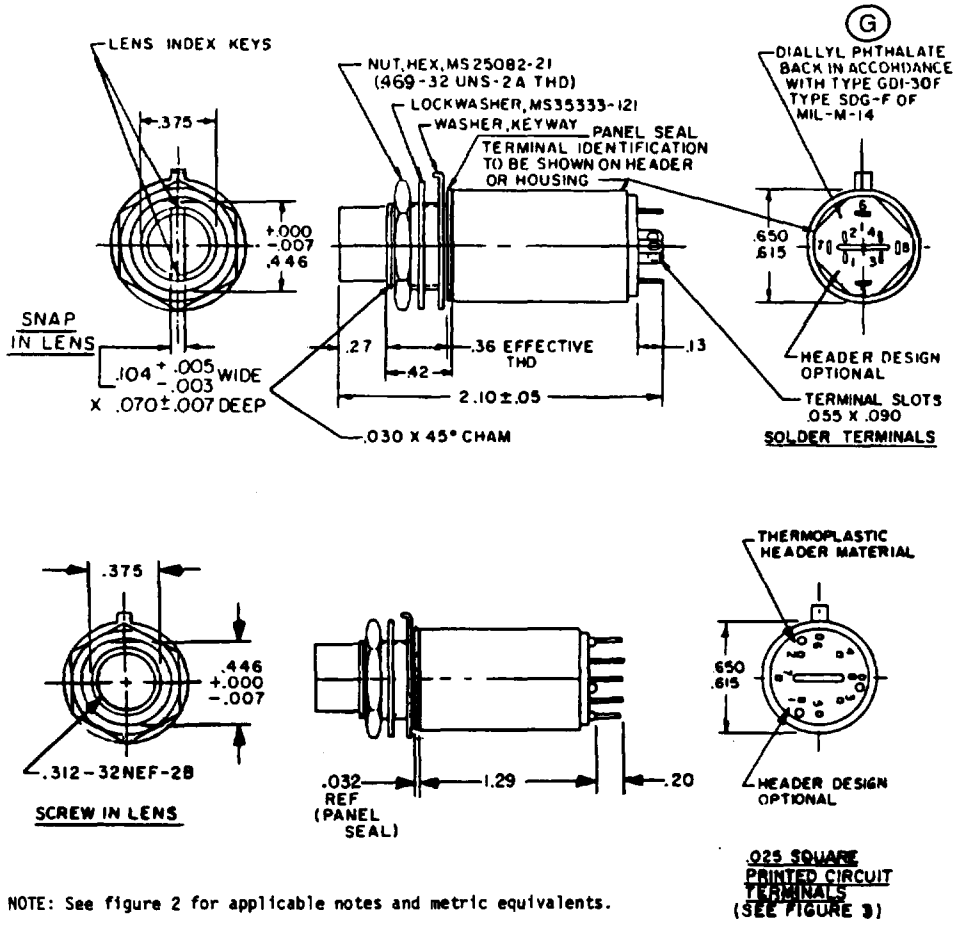


NOTE: See figure 2 for applicable notes and metric equivalents.

FIGURE 1. Switch, housing (without pushbutton lens.

(G) denotes changes


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

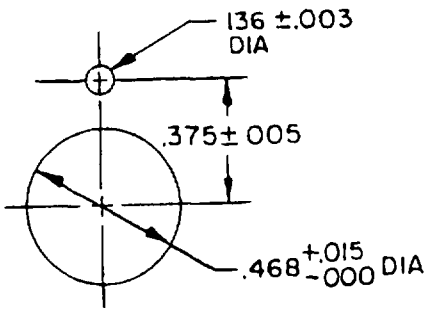


2 HOLE CUTOUT

OR

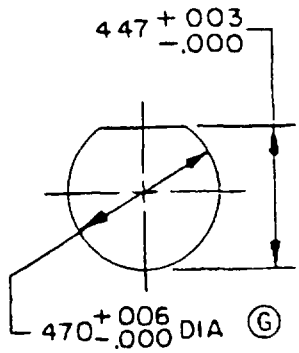


1 HOLE CUTOUT


RECOMMENDED PANEL MOUNTING HOLE DIMS (SEE NOTE 5)



TWO CIRCUIT ALTERNATE ACTION SHOWN



DPDT ALTERNATE ACTION SHOWN

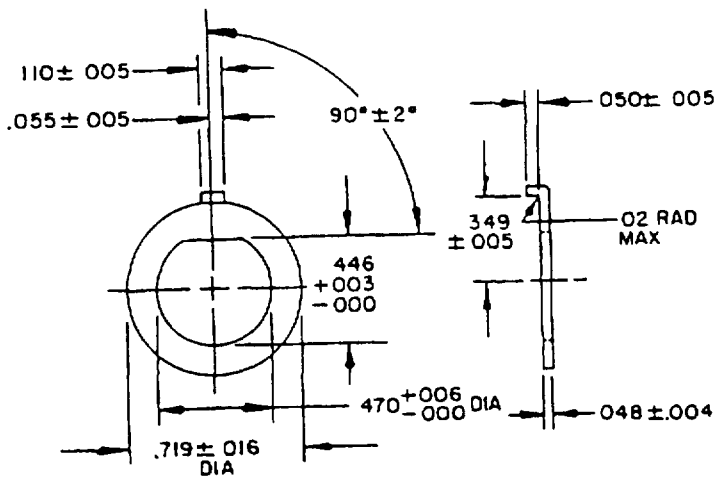

REQUIRED FOR 2 HOLE PANEL CUTOUT ONLY

FIGURE 2 Panel cutout, circuit diagram and nonturn washer


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
003	08	050	1 27	375	9 53
004	10	055	1 40	42	10 7
005	13	070	1 78	446	11 33
006	15	090	2 29	447	11 35
.007	18	104	2 64	468	11 89
015	38	110	2 79	470	11 94
016	41	13	3 3	615	15 62
02	5	.136	3 45	650	16 51
025	64	27	6 9	719	18 26
030	76	349	8 86	2.10	53 3
048	1.22	36	9 2		

NOTES
1. Dimensions are in inches
2. Unless otherwise specified, tolerances are ± 016 (41 mm) for three place decimals and ± 03 (8 mm) for two place decimals
3. Metric equivalents are given for general information only
4. Alinement of lens index slot to mounting flat 90° ±2° Applicable to units with snap-in lens.
5. One hole mounting is recommended when panel seal is utilized
6. Terminals shall be permanently identified as shown.

FIGURE 2 Panel cutout, circuit diagram and nonturn washer - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

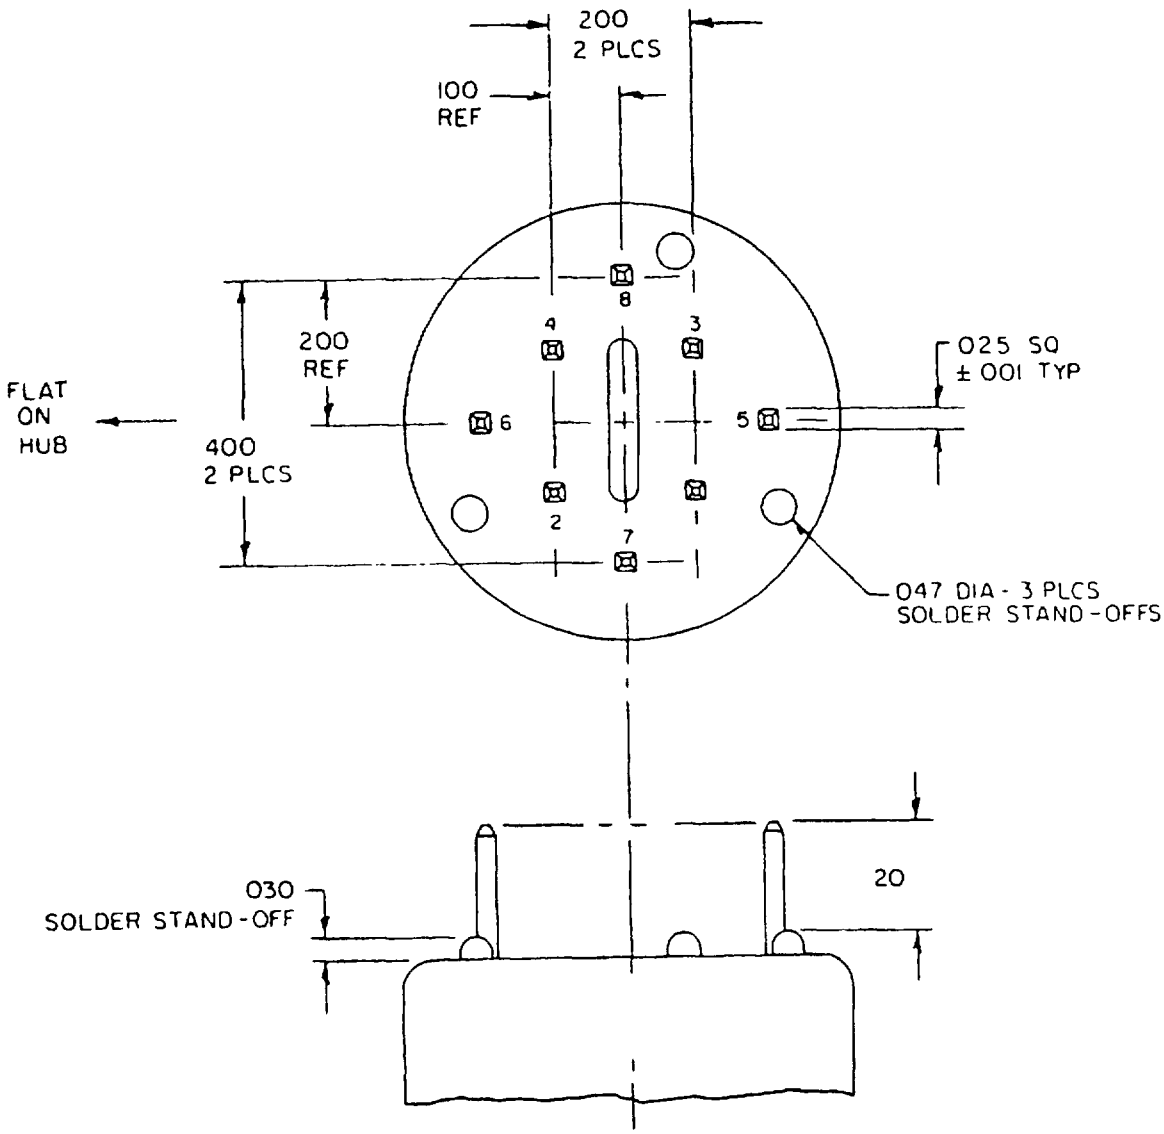

Inches	mm
001	03
010	25
025	64
030	.76
03	8
047	1 19
100	2 54
200	5 08
20	5.1
400	10 16

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ± 010 (25 mm) for three place decimals and ± 03 (.8 mm) for two place decimals

FIGURE 3. Printed circuit terminal positions and identification

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Ⓖ Dimensions and configuration See figures 1, 2, 3, and tables I and II.

Enclosure design: 2 (drip proof).

Ⓖ Operation See tables I and II

Ⓖ Color and display type See MIL-S-22885/99, MIL-S-22885/19 or MIL-S-22885/22, as applicable.

Temperature characteristic. 1 (-55°C to +85°C).

Vibration grade 2 (10 - 500 Hz).

Weight: 1.11 ounces maximum (includes lens and lamp).

Operating characteristics:

Operating force: 2 ±1 pounds.

Plunger travel. .160 inch maximum.

Shock (specified pulse). Method I (75 g's) except 50 g's for switches with M22885/22-01 through -05 lens. No opening of closed contacts in excess of 5 milliseconds. No closing of open contacts in excess of 10 microseconds.

Ⓖ Electrical ratings: See table III.

Contact resistance after electrical endurance: 1.5 ohms maximum.

Ⓖ Part number: M22885/18- (dash number from table I or II). Dash numbers from table II are inactive for new design.

Complete switch shall consist of

Ⓖ a. Switch housing in accordance with figures 1, 2, and 3.

Ⓖ b. Lens. (MIL-S-22885/19, MIL-S-22885/22, or MIL-S-22885/99. Switches with MIL-S-22885/19 or MIL-S-22885/22 lenses are inactive for new design.

c. Lamp (T-1-3/4 midget flange base, incandescent type): Not included, order separately.

Ⓖ TABLE I. Dash numbers for switch housings.

Dash numbers				Circuit characteristic	Operation	Pushbutton lens type
Printed circuit terminals		Solder terminals				
149	1/	01	1/	DPDT	Momentary	Threaded
150		02		DPDT	Alternate action	Threaded
151		03		Two circuit	Momentary	Threaded
152		04		Two circuit	Alternate action	Threaded
153		05		DPDT	Momentary	Snap-in
154		06		DPDT	Alternate action	Snap-in
155		07		Two circuit	Momentary	Snap-in
156		08		Two circuit	Alternate action	Snap-in

1/ These are switch housings that do not include pushbutton lens. Acquire pushbutton lens separately. See MIL-S-22885/99.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Inactive for new design dash numbers. 1/

Dash numbers		Lens M22885/	Circuit characteristic	Operation	Lens type
Printed circuit terminals	Solder terminals				
157	09	22-01 (Yellow)	DPDT	Momentary	Threaded
158	10	22-02 (White)	"	"	"
159 2/	11 2/	22-03 (Red)	"	"	"
160	12	22-04 (Green)	"	"	"
161	13	22-05 (Blue)	"	"	"
162	14	22-06 (Yellow)	"	"	"
163	15	22-07 (White)	"	"	"
164	16	22-08 (Red)	"	"	"
165	17	22-09 (Green)	"	"	"
166	18	22-10 (Blue)	"	"	"
167	19	22-11 (Yellow)	"	"	"
168	20	22-12 (White)	"	"	"
169	21	22-13 (Red)	"	"	"
170	22	22-14 (Green)	"	"	"
171	23	22-15 (Blue)	"	"	"
172	24	22-16 (Yellow)	"	"	"
173	25	22-17 (White)	"	"	"
174	26	22-18 (Red)	"	"	"
175	27	22-19 (Green)	"	"	"
176	28	22-20 (Blue)	"	"	"
177	29	22-01 (Yellow)	"	Alternate action	"
178	30	22-02 (White)	"	"	"
179 2/	31 2/	22-03 (Red)	"	"	"
180	32	22-04 (Green)	"	"	"
181	33	22-05 (Blue)	"	"	"
182	34	22-06 (Yellow)	"	"	"
183	35	22-07 (White)	"	"	"
184	36	22-08 (Red)	"	"	"
185	37	22-09 (Green)	"	"	"
186	38	22-10 (Blue)	"	"	"
187	39	22-11 (Yellow)	"	"	"
188	40	22-12 (White)	"	"	"
189	41	22-13 (Red)	"	"	"
190	42	22-14 (Green)	"	"	"
191	43	22-15 (Blue)	"	"	"
192	44	22-16 (Yellow)	"	"	"
193	45	22-17 (White)	"	"	"
194	46	22-18 (Red)	"	"	"
195	47	22-19 (Green)	"	"	"
196	48	22-20 (Blue)	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Inactive for new design dash numbers - Continued. 1/

Dash numbers: Printed circuit terminals	Dash numbers: Solder terminals	Lens M22885/	Circuit characteristic	Operation	Lens type
197	49	22-01 (Yellow)	Two circuit	Momentary	Threaded
198	50	22-02 (White)	"	"	"
199 2/	51 2/	22-03 (Red)	"	"	"
200	52	22-04 (Green)	"	"	"
201	53	22-05 (Blue)	"	"	"
202	54	22-06 (Yellow)	"	"	"
203	55	22-07 (White)	"	"	"
204	56	22-08 (Red)	"	"	"
205	57	22-09 (Green)	"	"	"
206	58	22-10 (Blue)	"	"	"
207	59	22-11 (Yellow)	"	"	"
208	60	22-12 (White)	"	"	"
209	61	22-13 (Red)	"	"	"
210	62	22-14 (Green)	"	"	"
211	63	22-15 (Blue)	"	"	"
212	64	22-16 (Yellow)	"	"	"
213	65	22-17 (White)	"	"	"
214	66	22-18 (Red)	"	"	"
215	67	22-19 (Green)	"	"	"
216	68	22-20 (Blue)	"	"	"
217	69	22-01 (Yellow)	"	Alternate action	"
218	70	22-02 (White)	"	"	"
219 2/	71 2/	22-03 (Red)	"	"	"
220	72	22-04 (Green)	"	"	"
221	73	22-05 (Blue)	"	"	"
222	74	22-06 (Yellow)	"	"	"
223	75	22-07 (White)	"	"	"
224	76	22-08 (Red)	"	"	"
225	77	22-09 (Green)	"	"	"
226	78	22-10 (Blue)	"	"	"
227	79	22-11 (Yellow)	"	"	"
228	80	22-12 (White)	"	"	"
229	81	22-13 (Red)	"	"	"
230	82	22-14 (Green)	"	"	"
231	83	22-15 (Blue)	"	"	"
232	84	22-16 (Yellow)	"	"	"
233	85	22-17 (White)	"	"	"
234	86	22-18 (Red)	"	"	"
235	87	22-19 (Green)	"	"	"
236	88	22-20 (Blue)	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Inactive for new design dash numbers - Continued 1/

Dash numbers		Lens M22885/	Circuit characteristic	Operation	Lens type
Printed circuit terminals	Solder terminals				
237	89	19-01 (Yellow)	DPDT	Momentary	Snap-in
238	90	19-02 (White)	"	"	"
239	91	19-03 (Red)	"	"	"
240	92	19-04 (Green)	"	"	"
241	93	19-05 (Blue)	"	"	"
242	94	19-06 (Yellow)	"	"	"
243	95	19-07 (White)	"	"	"
244	96	19-08 (Red)	"	"	"
245	97	19-09 (Green)	"	"	"
246	98	19-10 (Blue)	"	"	"
247	99	19-11 (Yellow)	"	"	"
248	100	19-12 (White)	"	"	"
249	101	19-13 (Red)	"	"	"
250	102	19-14 (Green)	"	"	"
251	103	19-15 (Blue)	"	"	"
252	104	19-01 (Yellow)	"	Alternate action	"
253	105	19-02 (White)	"	"	"
254	106	19-03 (Red)	"	"	"
255	107	19-04 (Green)	"	"	"
256	108	19-05 (Blue)	"	"	"
257	109	19-06 (Yellow)	"	"	"
258	110	19-07 (White)	"	"	"
259	111	19-08 (Red)	"	"	"
260	112	19-09 (Green)	"	"	"
261	113	19-10 (Blue)	"	"	"
262	114	19-11 (Yellow)	"	"	"
263	115	19-12 (White)	"	"	"
264	116	19-13 (Red)	"	"	"
265	117	19-14 (Green)	"	"	"
266	118	19-15 (Blue)	"	"	"
267	119	19-01 (Yellow)	Two circuit	Momentary	"
268	120	19-02 (White)	"	"	"
269	121	19-03 (Red)	"	"	"
270	122	19-04 (Green)	"	"	"
271	123	19-05 (Blue)	"	"	"
272	124	19-06 (Yellow)	"	"	"
273	125	19-07 (White)	"	"	"
274	126	19-08 (Red)	"	"	"
275	127	19-09 (Green)	"	"	"
276	128	19-10 (Blue)	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE II. Inactive for new design dash numbers - Continued 1/

Dash numbers		Lens M22885/	Circuit characteristic	Operation	Lens type
Printed circuit terminals	Solder terminals				
277	129	19-11 (Yellow)	Two circuit	Momentary	Snap-in
278	130	19-12 (White)	"	"	"
279	131	19-13 (Red)	"	"	"
280	132	19-14 (Green)	"	"	"
281	133	19-15 (Blue)	"	"	"
282	134	19-01 (Yellow)	"	Alternate action	"
283	135	19-02 (White)	"	"	"
284	136	19-03 (Red)	"	"	"
285	137	19-04 (Green)	"	"	"
286	138	19-05 (Blue)	"	"	"
287	139	19-06 (Yellow)	"	"	"
288	140	19-07 (White)	"	"	"
289	141	19-08 (Red)	"	"	"
290	142	19-09 (Green)	"	"	"
291	143	19-10 (Blue)	"	"	"
292	144	19-11 (Yellow)	"	"	"
293	145	19-12 (White)	"	"	"
294	146	19-13 (Red)	"	"	"
295	147	19-14 (Green)	"	"	"
296	148	19-15 (Blue)	"	"	"

1/ These switch assemblies include MIL-S-22885/19 or MIL-S-22885/22 pushbutton lens and are inactive for new design. Replace with separate switch housing (see table I) and pushbutton lens (see MIL-S-22885/99)

2/ Switches with lenses M22855/22-01 through M22885/22-05 are not for applications that require greater than 50 g shock loads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

TABLE III. Electrical ratings.

Load	28 V dc	115 V ac (60/400 Hz)
	(amperes)	(amperes)
Resistive	2.0	2.0
Inductive	1.5	1.5
Lamp	0.5	0.5

QUALIFICATION:

Qualification inspection: All applicants for qualification approval shall demonstrate that each of their items conforms to all the requirements specified in the applicable documents, singularly and in combination with all other previously qualified items, regardless of manufacturer (see table IV).

Group A inspection.

Seal test. Visual examination only.

Ⓖ TABLE IV. Qualification inspection (group submission).

Sample units	Qualification table of MIL-S-22885	Extent of approval
Assembly of M22885/18-02 and M22885/99-K108 1/	All tests 2/	All
Assembly of M22885/18-153 and M22885/99-K208	Groups I and II	
Assembly of M22885/18-07 and M22885/99-K208 (2 sample units)	Visual and mechanical examination Operating characteristics Contact resistance	
Assembly of M22885/18-08 and M22885/99-K208 (2 sample units)		

1/ For group VIII tests, two samples each of M22885/99-K201 through M22885/99-K215 pushbutton lens shall be assembled to M22885/18-07 switch housing.
2/ Seal test to be performed in group II and group VII only. 115 V ac electrical endurance tests are to be performed at 60 Hz only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AV, MI
Navy - OS
Air Force - 17, 99
DLA - ES

User activities
Navy - AS, MC, SH
Air Force - 19

Preparing activity
Navy - EC

Agent:
DLA - ES

(Project 5930-1352-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.