NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

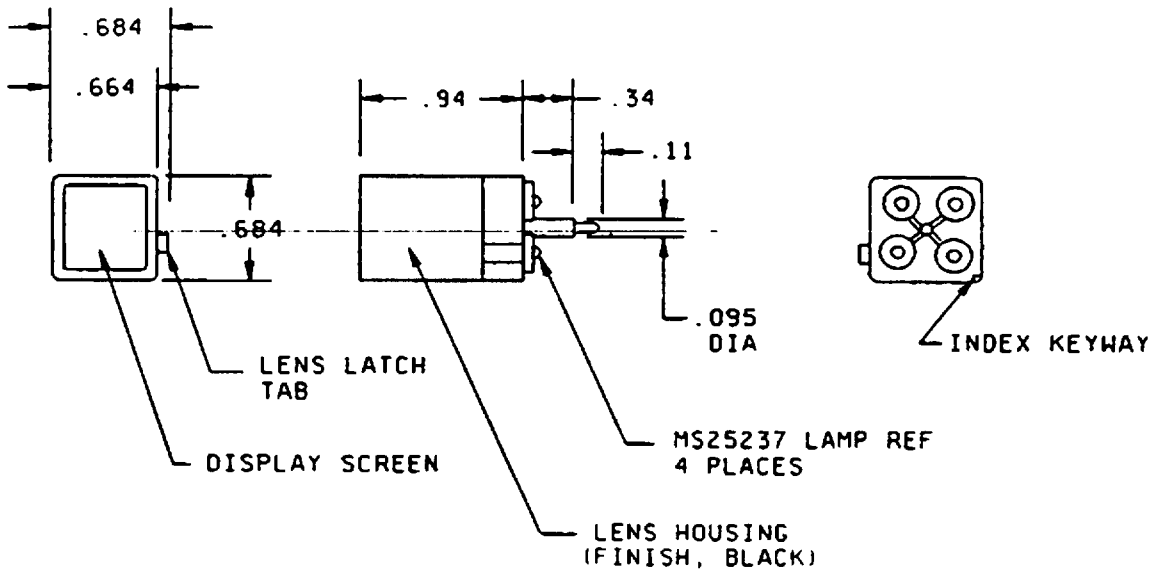
INCH-POUND
MIL-PRF-22885/52B
19 February 1993
SUPERSEDING
MIL-S-22885/52A
22 November 1982

PERFORMANCE SPECIFICATION SHEET

(B) SWITCH, PUSH BUTTON, ILLUMINATED, PUSHBUTTON FOR (WITH PLANAR COLOR FILTERS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-22885.



Inches	mm
.095	2.41
.11	2.79
.34	8.64
.664	16.87
.684	17.37
.94	23.88

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and ±.020 (.51 mm) for two place decimals.

FIGURE 1. Design and construction.

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

(B) Design and construction See figure 1 Pushbutton shall accommodate four midget flange base T-1 ¾ incandescent lamps and shall be capable of mating with switch housings in accordance with MIL-S-22885/56, MIL-S-22885/86, and MIL-S-24317/9 Pushbutton shall accommodate color filters in accordance with MIL-S-22885/54 Unless otherwise specified in contract or purchase order, lamps are not supplied

Enclosure design 1 (Unsealed)

Temperature characteristic 1 (-55°C to +85°C)

Vibration grade 3 (10 - 2,000 Hz)

Display type W (White until illuminated, then background appears in color)

Material

Display screen Shall be of clear transparent material

Lamp module Lamp insulator block may be fabricated from thermoplastic material

(B) Color and luminance See table I

Part or Identifying Number (PIN) M22885/52-(dash number from table II)

(B) Qualification inspection As a part of illuminated push button switch assembly, MIL-S-22885/56 or MIL-S-22885/86

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

TABLE I Chromaticity limits and photometric brightness

Color	Color code	Chromaticity limits 1/ 2360° Kelvin x	Chromaticity limits 1/ 2360° Kelvin y	Switch photometric brightness (foot-lamberts) 2/ minimum
Blue	B	210	280	35
		330	280	
		330	420	
		210	420	
Green	G	230	610	150
		350	540	
		380	580	
		280	660	
Red	R	695	285	150
		703	SL 3/	
		655	325	
		660	SL 3/	
White	W	490	390	150
		490	420	
		535	410	
		535	435	
Yellow	Y	565	410	150
		580	SL 3/	
		540	435	
		550	SL 3/	









1/ The chromaticity of the illuminated display, expressed as x and y coordinates on the CIE chromaticity diagram, shall lie within areas bounded by the coordinates listed for each color, using a source illuminate of 2360°K

2/ Switch photometric brightness, when viewed from the front of the applicable pushbutton display and using midget flange, T-1 ¾ incandescent lamps operated at a 34 ± 02 MSCP

3/ SL = Spectrum Locus (where intersected by other coordinate pair)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

(6) TABLE II Dash number, display configuration and color sequence

Dash number 1/ 2/	Display 3/	Dash number 1/ 2/	Display 3/
-1XXYX		-5XXX	
-2XXX		-6XX	
-3XX		-7XXX	
-4X		-8XXX	

1/ Dash numbers are shown for lamp capsules without color filters. Replace X's with the color codes of table I in the sequence shown.

(8) 2/ Dash numbers as shown replace and are interchangeable with previous dash numbers which included additional zeros (Example -0C1XXYX).

(8) 3/ Pushbutton assembly removal latch is shown for orientation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - SH
Air Force - 99
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-1502-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.