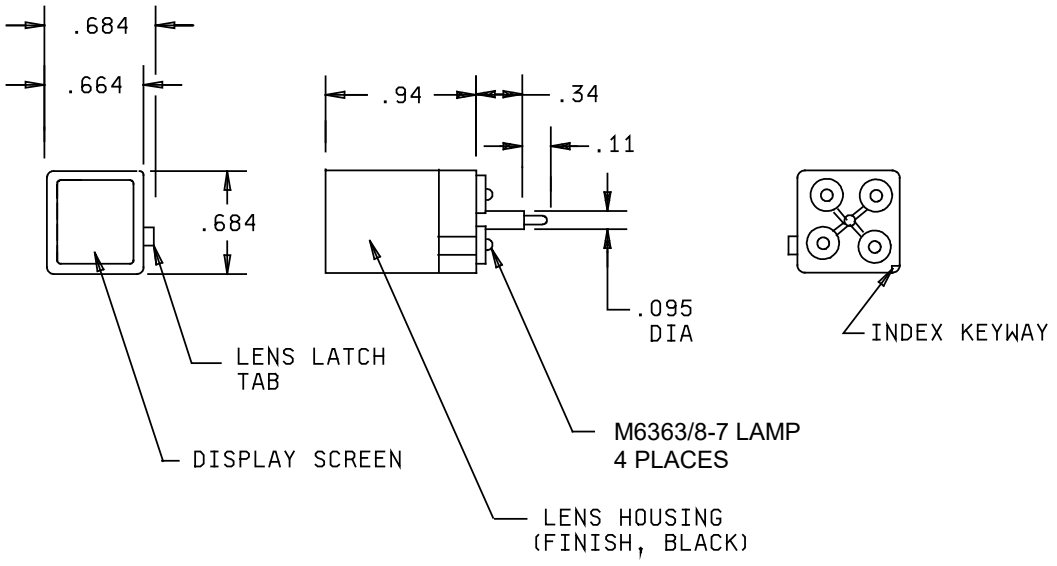
INCH-POUND
MIL-PRF-22885/52E
14 February 2019
SUPERSEDING
MIL-PRF-22885/52D
1 November 2006

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED, PUSHBUTTON FOR (WITH PLANAR COLOR FILTERS)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-22885.



Inches	mm
.095	2.41
.11	2.79
.34	8.64
.664	16.87
.684	17.37
.94	23.88

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and ±.020 (.51 mm) for two place decimals.

FIGURE 1. Design and construction.

AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1. Pushbutton shall accommodate four midget flange base T-1 ¾ incandescent lamps and shall be capable of mating with switch housings in accordance with MIL-PRF-22885/56, MIL-PRF-22885/86, and MIL-S-24317/9. Pushbutton shall accommodate color filters in accordance with MIL-PRF-22885/54. Unless otherwise specified in contract or purchase order, lamps are not supplied.

Enclosure design: 1 (Unseated)

Temperature characteristic: 1 (-55°C to +85°C).

Vibration grade: 3 (10 - 2,000 Hz)

Display type: W (White until illuminated, then background appears in color).

Material:

Display screen: Shall be of clear transparent material.

Lamp module: Lamp insulator block may be fabricated from thermoplastic material.

Color and luminance: See table I.

Part or Identifying Number (PIN): M22885/52-(dash number from table II).

Qualification inspection: As a part of illuminated push button switch assembly, MIL-PRF-22885/56 or MIL-PRF-22885/86.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.









TABLE I. Chromaticity limits and photometric brightness.

Color	Color code	Chromaticity limits 1/ 2360° Kelvin		Switch photometric brightness (foot-lamberts) 2/ minimum
		X	Y	
Blue	B	210 330 330 210	280 280 420 420	35
Green	G	230 350 380 280	610 540 580 660	150
Red	R	695 703 655 660	285 SL 3/ 325 SL 3/	150
White	W	490 490 535 535	390 420 410 435	150
Yellow	Y	565 580 540 550	410 SL 3/ 435 SL 3/	150

1/ The chromaticity of the illuminated display, expressed as x and y coordinates on the CIE chromaticity diagram, shall lie within areas bounded by the coordinates listed for each color, using a source illuminate of 2360°K.
2/ Switch photometric brightness, when viewed from the front of the applicable pushbutton display and using midget flange, T-1 ¾ incandescent lamps operated at a 34 ±.02 MSCP.
3/ SL = Spectrum Locus (where intersected by other coordinate pair).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

TABLE II DASH NUMBER, DISPLAY CONFIGURATION AND COLOR SEQUENCE

DASH NUMBER 1/2/	DISPLAY 3/	DASH NUMBER 1/2/	DISPLAY 3/
-1XXXX		-5XXX	
-2XXX		-6XX	
-3XX		-7XXX	
-4X		-8XXX	

1/ Dash numbers are shown for lamp capsules without color filters. Replace X's with the color codes of table I in the sequence shown.
2/ Dash numbers as shown replace and are interchangeable with previous dash numbers which included additional zeros. (Example: -001XXXX)
3/ Pushbutton assembly removal latch is shown for orientation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

Changes from previous revision. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced Documents:
MIL-PRF-22885
MIL-PRF-22885/54
MIL-PRF-22885/56
MIL-PRF-22885/86
MIL-S-24317/9

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2018-069)

Review activities:
Army - AR, CR4, MI
Navy - AS, MC, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.