MILITARY SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED,


LENSES FOR

(SNAP-IN, T-1-3/4 MFB LAMP)


Ⓖ Inactive for new design after 20 JULY 1988
For new design use MIL-S-22885/99.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-22885.

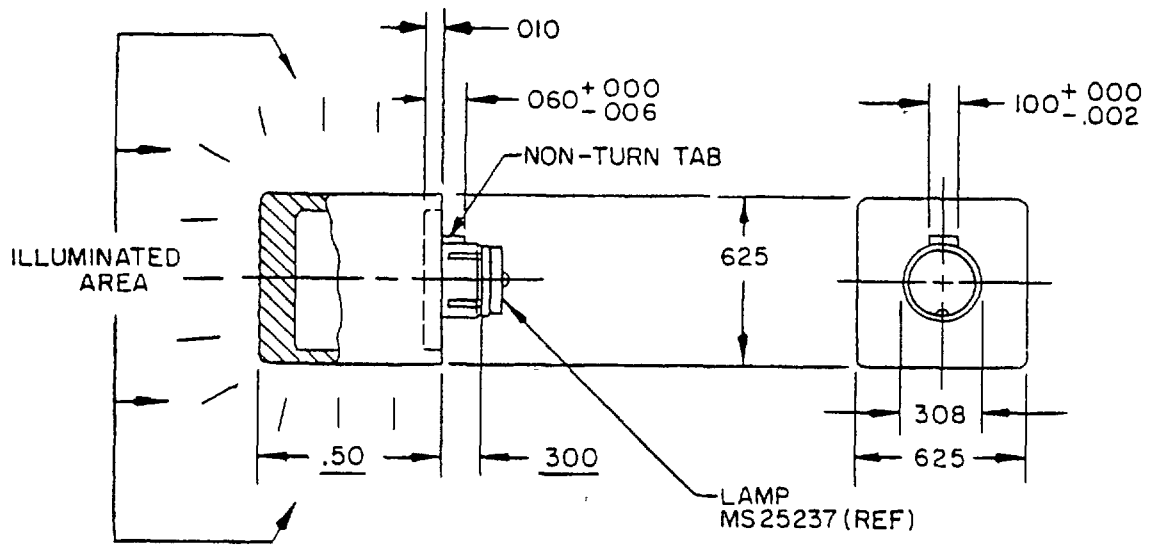

Configuration A

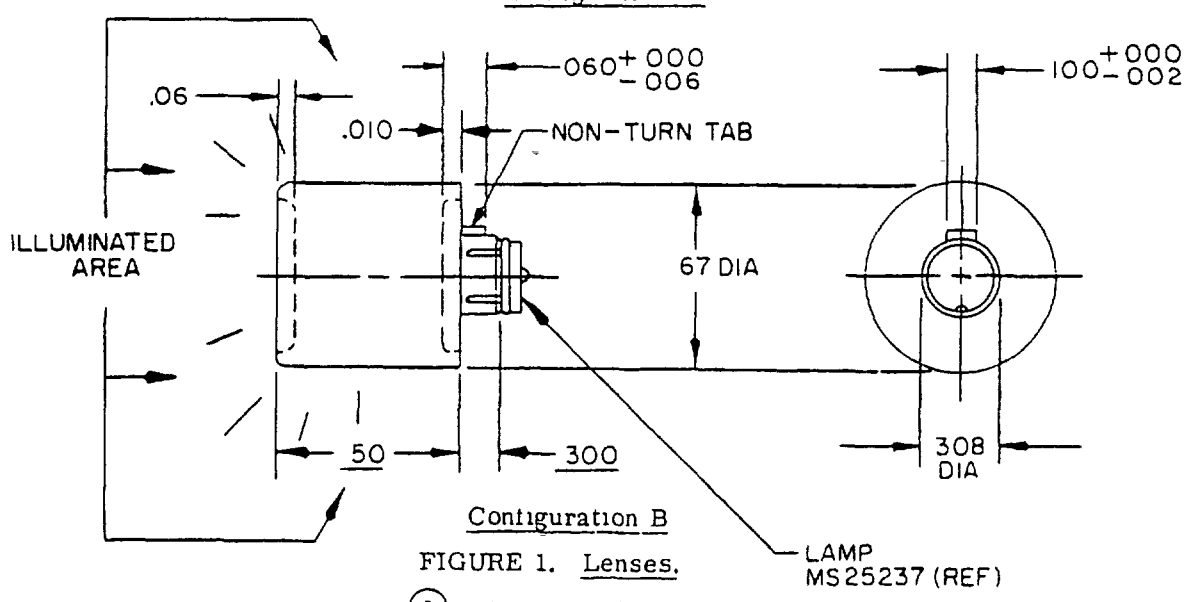


Configuration B

FIGURE 1. Lenses.

Ⓖ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

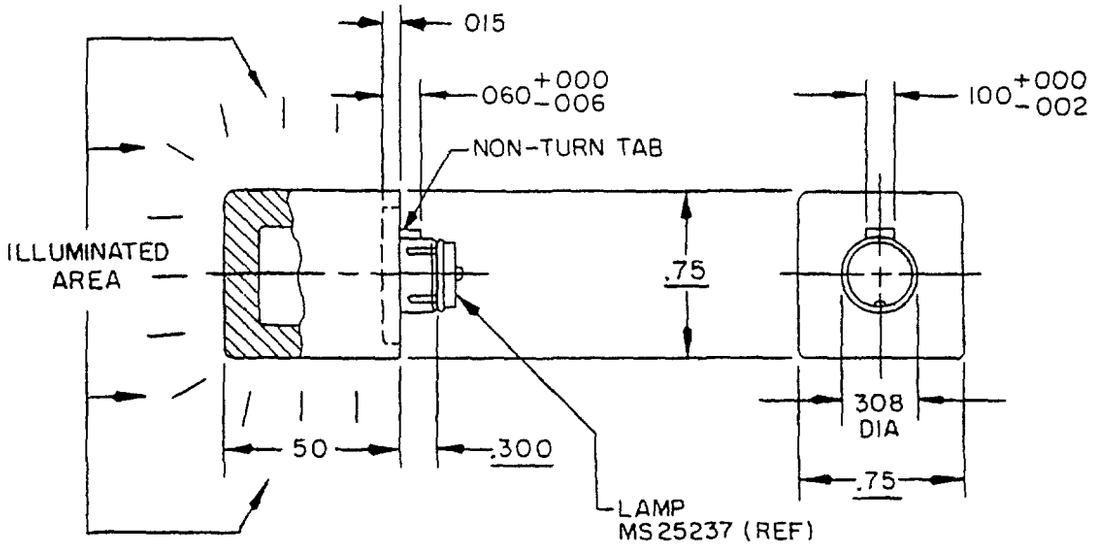

Configuration C

Inches	mm
.002	.05
.006	.15
.060	1.52
.100	2.54
.300	7.62
.308	7.82
.50	12.7
.625	15.88
.67	17.0
.75	19.0
.010	.25

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± 010 (.25 mm) and ± 02 (.51mm)
3. Internal design of lens is optional
4. Internal design of lamp retainer is optional
5. All lettering on lens shall be 1/8 inch high Gothic Normal Gorton type. The stroke height to width ratio is 8 ±1 1 The letter fill shall be black on white and yellow lenses, white on all other colors The number of alpha-numerical characters that can be imprinted on one line is 6
6. The non-turn tab configuration is optional It shall engage the slots in the switch housing to prevent rotation
7. Metric equivalents are given for general information only

FIGURE 1. Lenses - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration. See figure 1 and table I

Ⓖ Display type C (colored background).

Material L-P-349.

Thermal shock: 71°C maximum temperature (nonoperating).

Lens orientation: The lens shall withstand rotational torque up to 2-inch pounds in either direction without rotating more than 10°, and without damage to lens indexing mechanism.

Color coordinates: See table II.

Part number: M22885/19- (dash number from table I).

Qualification: Qualification inspection is required as part of the illuminated push button switch, MIL-S-22885/18

Ⓖ Group B inspection: Not applicable.

TABLE I. Part number and lens characteristics

Part number 1/ M22855/19-	Configuration	Color	Brightness 2/	Supersession data
			(3/4 face)	M22885/
01	A	Yellow	150 ft. L	---
02	A	White	200 ft. L	---
03	A	Red	15 ft L	---
04	A	Green	20 ft. L	---
05	A	Blue	5 ft L	---
06	B	Yellow	150 ft. L	20-01
07	B	White	200 ft. L	20-02
08	B	Red	15 ft. L	20-03
09	B	Green	20 ft. L	20-04
10	B	Blue	5 ft. L	20-05
11	C	Yellow	150 ft. L	21-01
12	C	White	200 ft. L	21-02
13	C	Red	15 ft. L	21-03
14	C	Green	20 ft L	21-04
15	C	Blue	5 ft. L	21-05

1/ Part numbers listed are for lenses without legends Lamps are not included.
2/ Brightness values are approximate, at 2,300° Kelvin, utilizing a T-1-3/4 lamp having a mean spherical candlepower of .34 ±.02.

TABLE II. Color coordinates.

Color coordinates ±.05		
	"x"	"y"
Yellow	.579	.417
White	.526	.413
Red	.701	.292
Green	.320	520
Blue	.112	.248

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

Intended use Configurations A, B, and C Lens shall accommodate one midget-flange-base T-1-3/4 incandescent lamp and shall be capable of mating with switch housings in accordance with MIL-S-22885/18.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - AS
Air Force - 17, 99
DLA - ES

User activities
Army - AR, AT, AV, ME
Navy - MC, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent
DLA - ES

(Project 5930-1352-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.