MILITARY SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED,


LENSES FOR

(SCREW-IN, T-1-3/4 MFB LAMP)


Ⓔ Inactive for new design after 20 JULY 1988.
For new design use MIL-S-22885/99.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-22885.

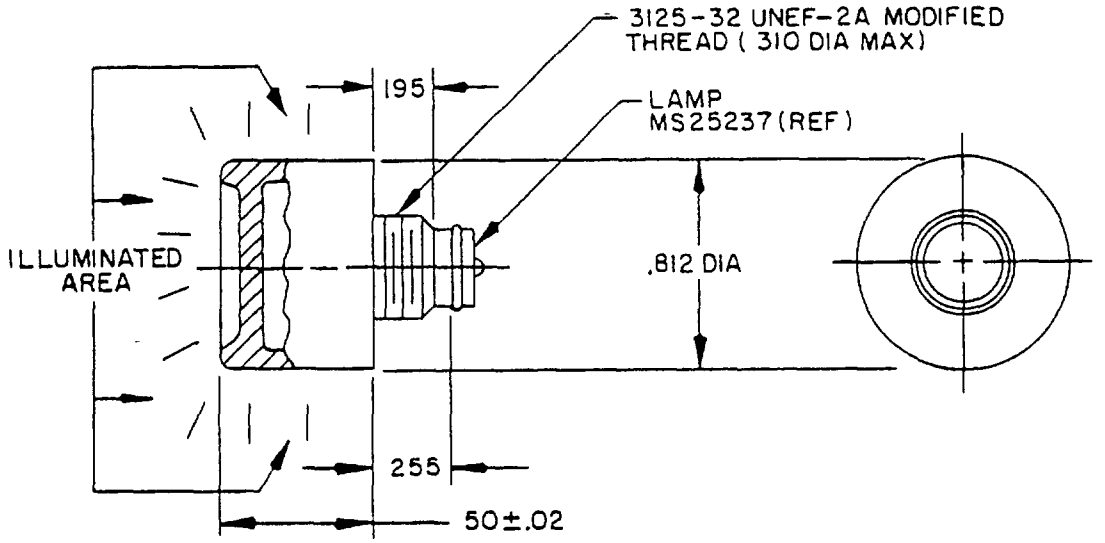

Configuration A

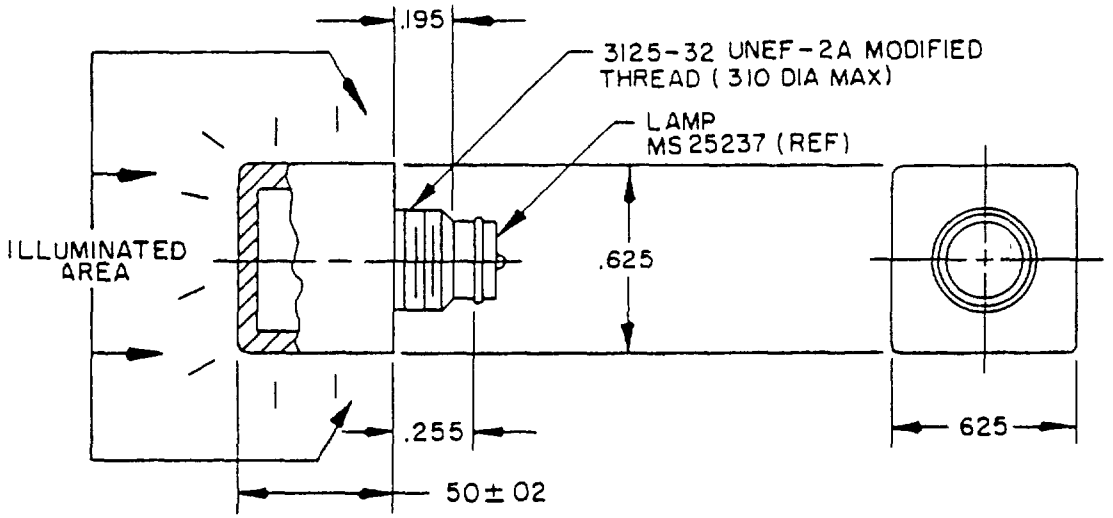


Configuration B


FIGURE 1. Lenses.
Ⓔ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

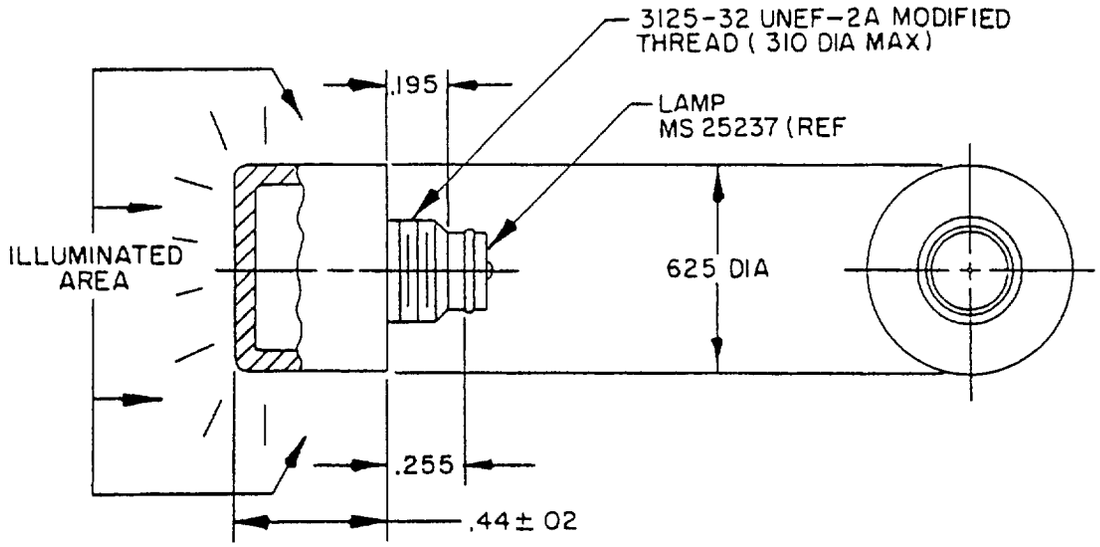

Configuration C

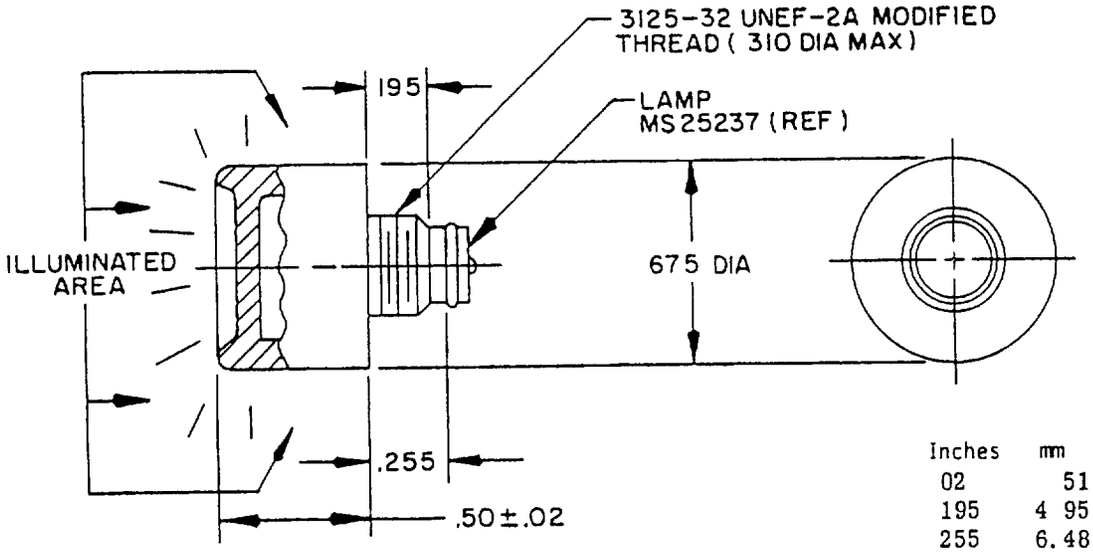

Configuration D

Inches	mm
02	51
195	4 95
255	6.48
310	7.87
3125	7 94
44	11.18
50	12 70
625	15.88
675	17.15
812	20.62

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010 (.25 mm).
3. Internal design of lens is optional.
4. Internal design of lamp retainer is optional.
(E) 5. All lettering on lens shall be 1/8 inch high Gothic Normal Gorton type. The stroke height to width ratio is 8 ±1 .1 The letter fill shall be black on white and yellow lenses, white on all other colors. The number of alpha-numerical characters that can be imprinted on one line is 6.
6. The lens is orientable.
7. Metric equivalents are given for general information only.

FIGURE 1. Lenses - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1 and table I.

(E) Display type C (colored background).

Material L-P-349

Thermal shock: 71°C maximum temperature (nonoperating).

Color coordinates See table II

Part number: M22885/22- (dash number from table I).

(E) Qualification: Qualification inspection is required as part of the illuminated push button switch, in MIL-S-22885/18.

(E) Group B inspection: Not applicable.

TABLE I. Part number and lens characteristics.

Part number 1/ M22855/22-	Configuration	Color	Brightness 2/	Supersession data
			(3/4 face)	M22885/
01	A	Yellow	350 ft. L	---
02	A	White	300 ft. L	---
03	A	Red	100 ft. L	---
04	A	Green	75 ft. L	---
05	A	Blue	20 ft. L	---
06	B	Yellow	350 ft. L	● 23-01
07	B	White	300 ft. L	23-02
08	B	Red	100 ft. L	23-03
09	B	Green	75 ft. L	23-04
10	B	Blue	20 ft. L	23-05
11	C	Yellow	350 ft. L	24-01
12	C	White	300 ft. L	24-02
13	C	Red	100 ft. L	24-03
14	C	Green	75 ft. L	24-04
15	C	Blue	20 ft. L	24-05
16	D	Yellow	350 ft. L	25-01
17	D	White	300 ft. L	25-02
18	D	Red	100 ft. L	25-03
19	D	Green	75 ft. L	25-04
20	D	Blue	20 ft. L	25-05

1/ Part numbers listed are for lenses without legends. Lamps are not included.
(E) 2/ Brightness values are approximate, at 2,300° Kelvin, utilizing a T-1-3/4 lamp having a mean spherical candlepower of .34 ±.02

TABLE II. Color coordinates.

Color coordinates ± 05		
	"x"	"y"
Yellow	.579	.417
White	.526	.413
Red	.701	.292
Green	.320	520
Blue	.112	.248

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

(E) Intended use Configurations A, B, C, and D Lens shall accommodate one midget-flange-base T-1-3/4 incandescent lamp and shall be capable of mating with switch housings in accordance with MIL-S-22885/18

(E) CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-1352-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.