
MILITARY SPECIFICATION SHEET

SWITCH ASSEMBLIES, STYLE SL07
(10 AMPERE - DOUBLE BREAK)

Ⓐ Inactive for new design after 13 January 1986.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switch assemblies described herein shall consist of this specification and the latest issue of MIL-S-22885.

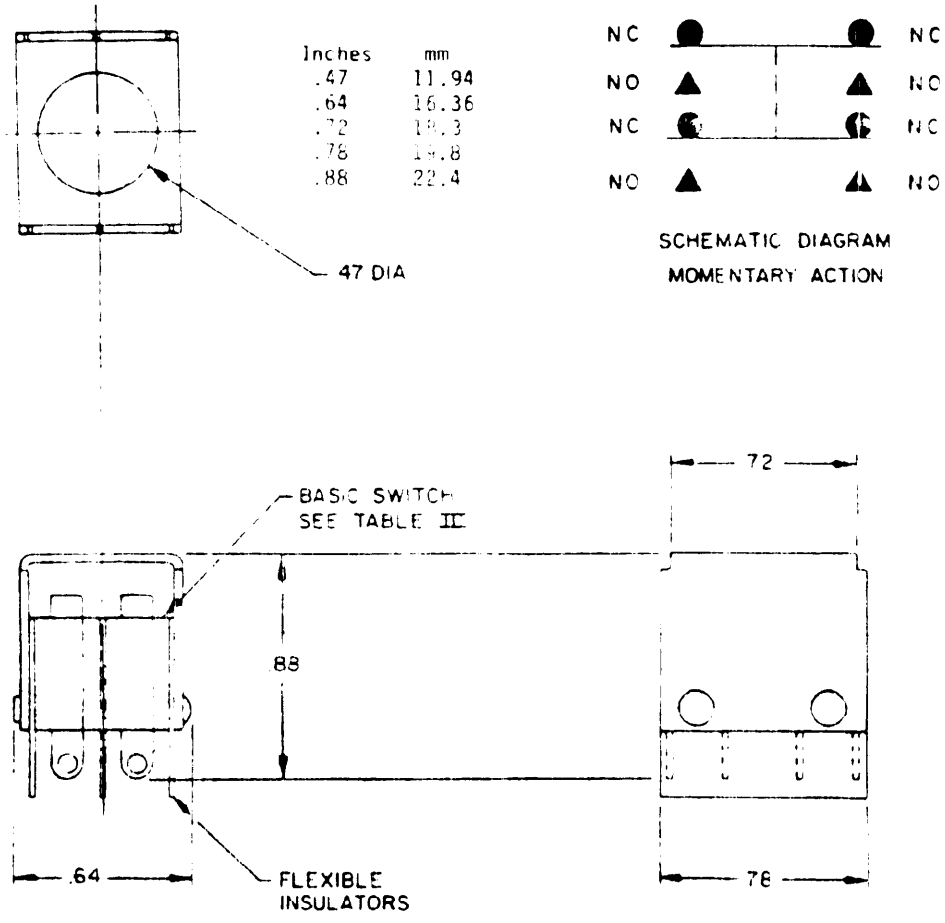


NOTES:
1. Dimensions are in inches.
2. Tolerance is ±.02 (0.5 mm).
3. Metric equivalents are given for general information only.

FIGURE 1. Two two-circuit momentary action switch assembly.

Ⓐ denotes changes


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

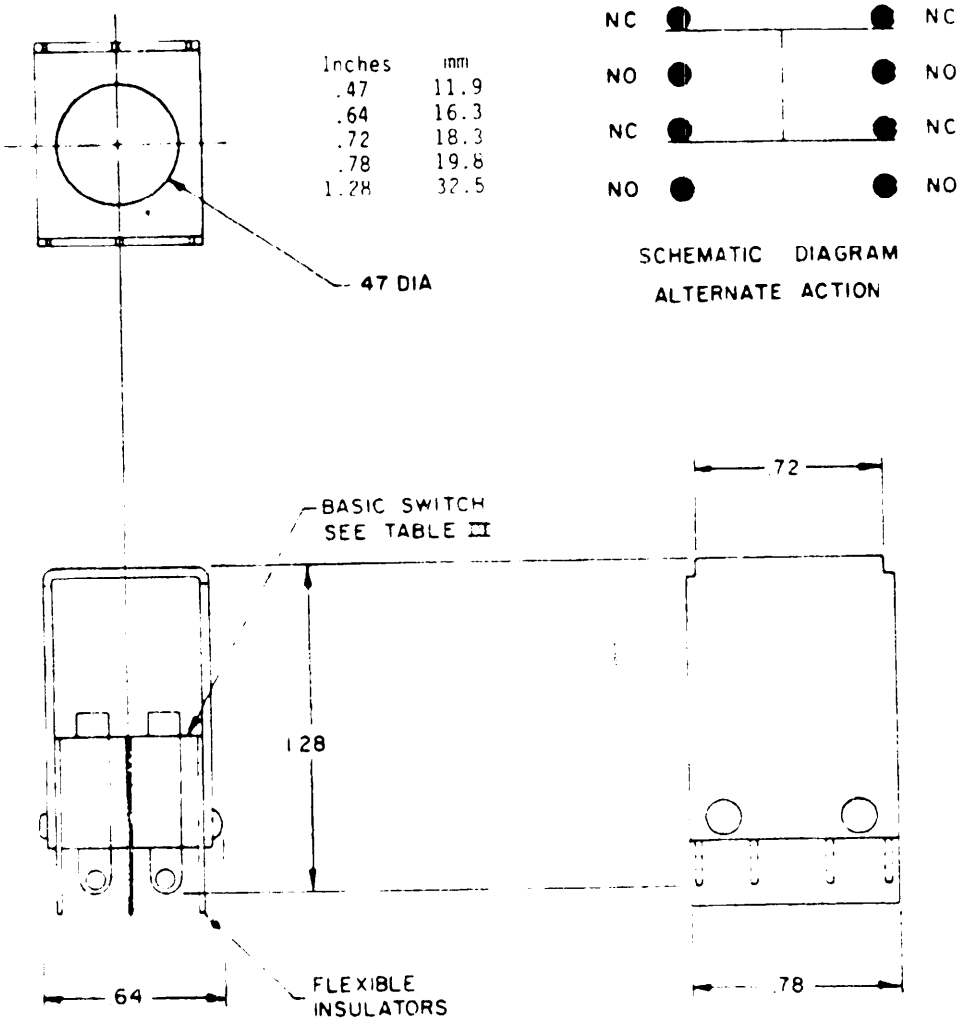

NOTES:
1. Dimensions are in inches.
2. Tolerance is ±.02 (0.5 mm).
3. Metric equivalents are given for general information only.

FIGURE 2. Two two-circuit alternate action switch assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

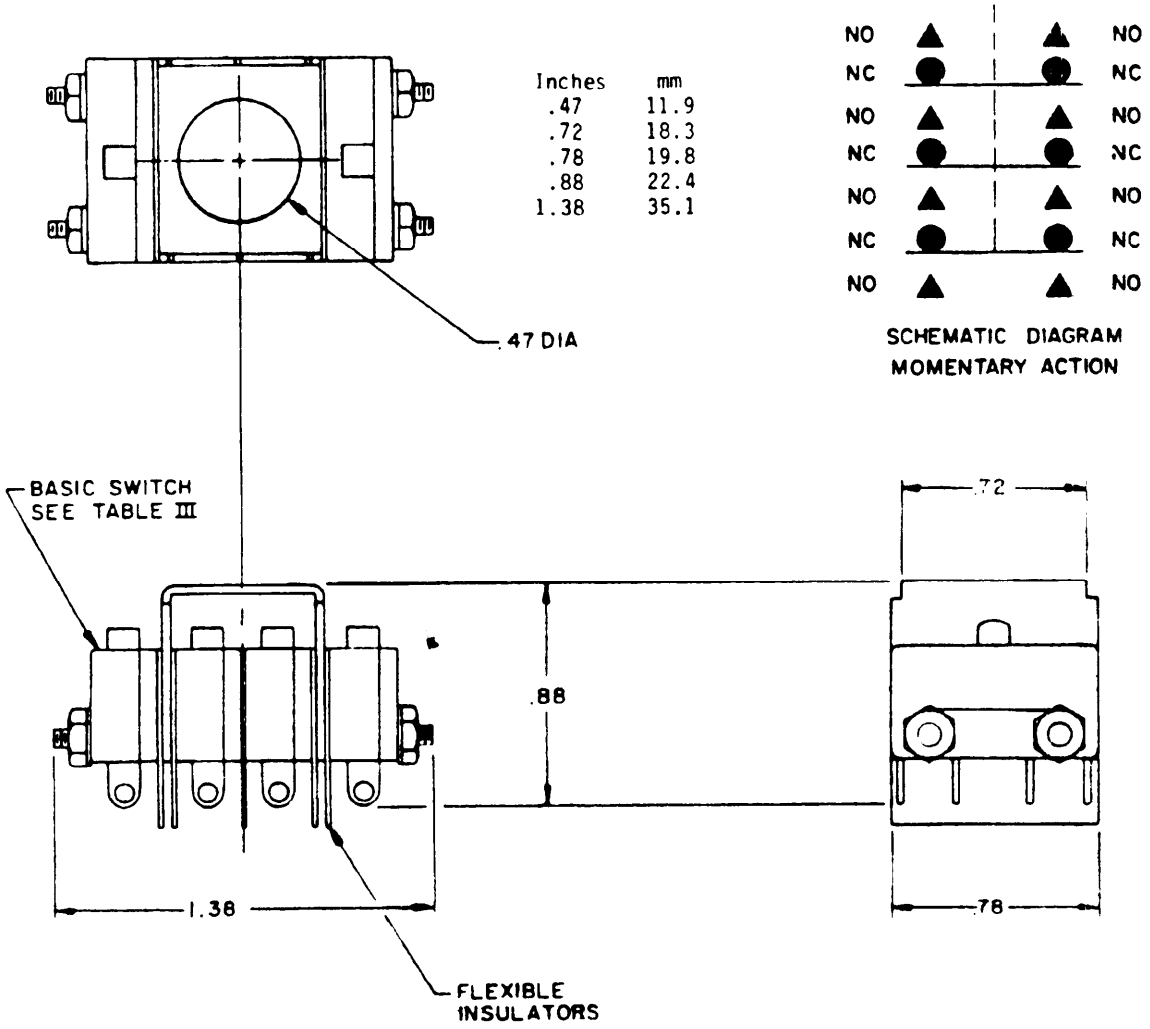


NOTES:
1. Dimensions are in inches.
2. Tolerance is ±.02 (0.5 mm).
3. Metric equivalents are given for general information only.

FIGURE 3. Four two-circuit momentary action switch assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.


spection. One reading at center shall be taken for group A inspection. If a visual brightness

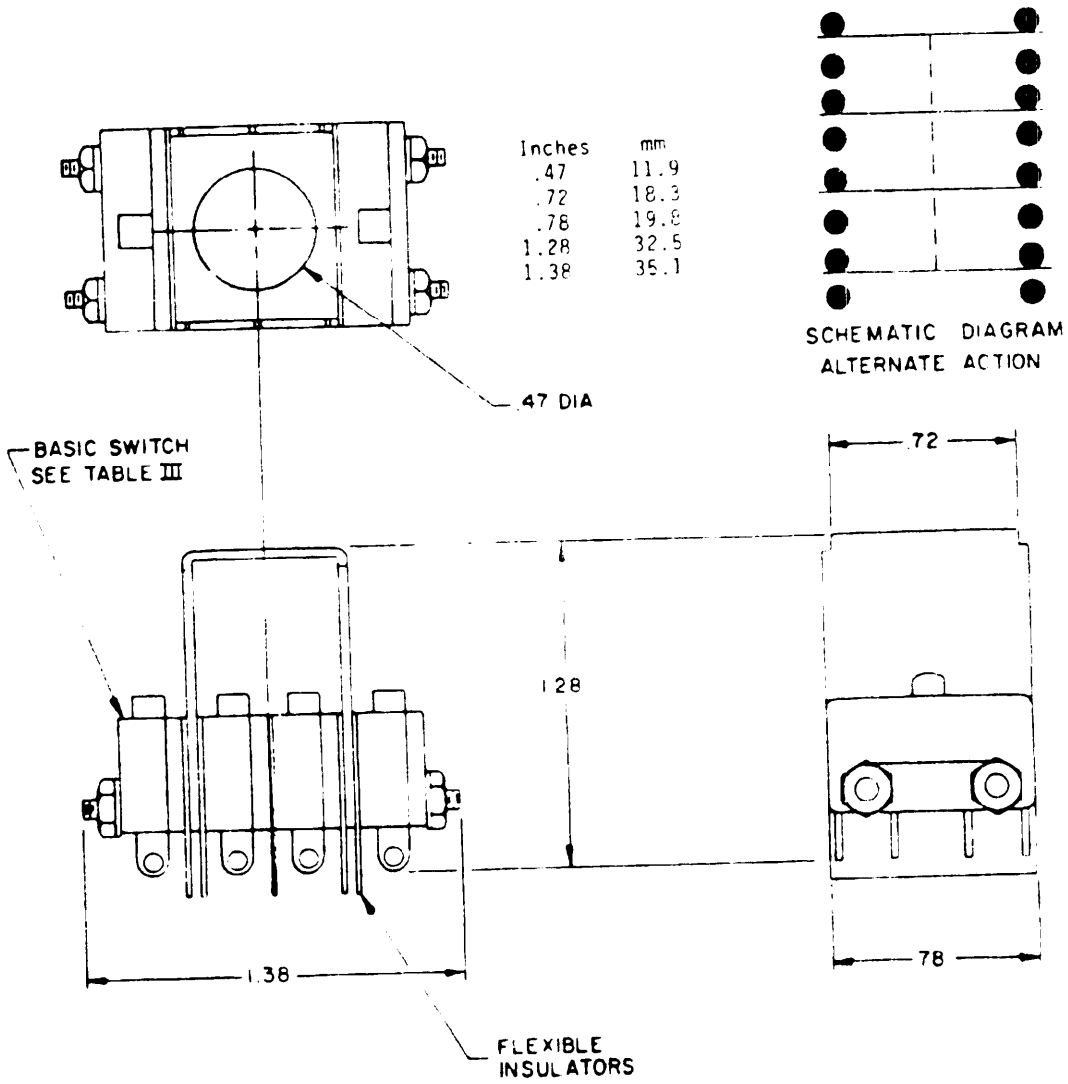

NOTES:
1. Dimensions are in inches.
2. Tolerance is ±.02 (0.5 mm).
3. Metric equivalents are given for general information only.

FIGURE 4. Four two-circuit alternate action switch assembly.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

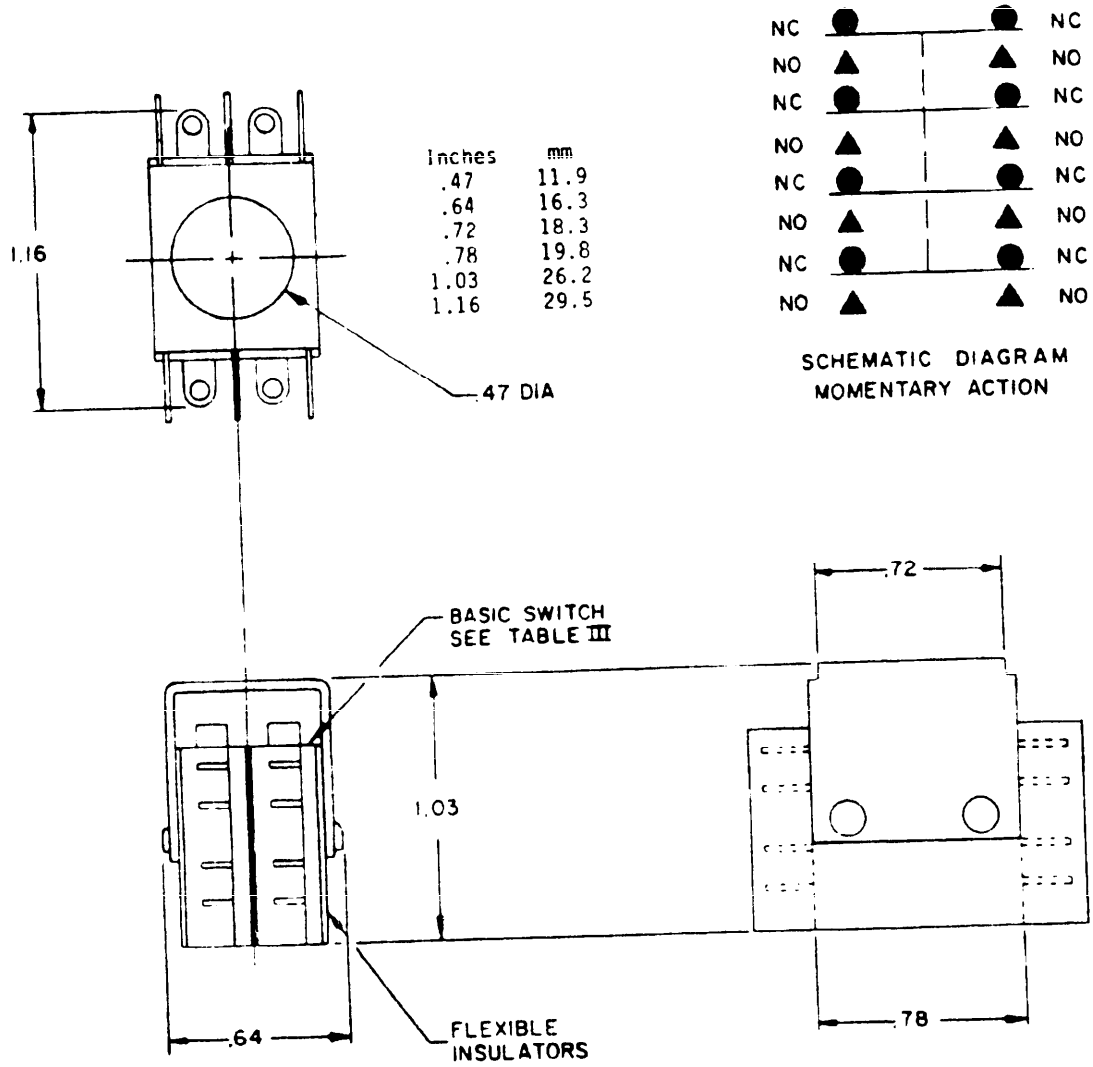

NOTES:
1. Dimensions are in inches.
2. Tolerance is ±.02 (0.5 mm).
3. Metric equivalents are given for general information only.

FIGURE 5. Two four-circuit momentary action switch assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

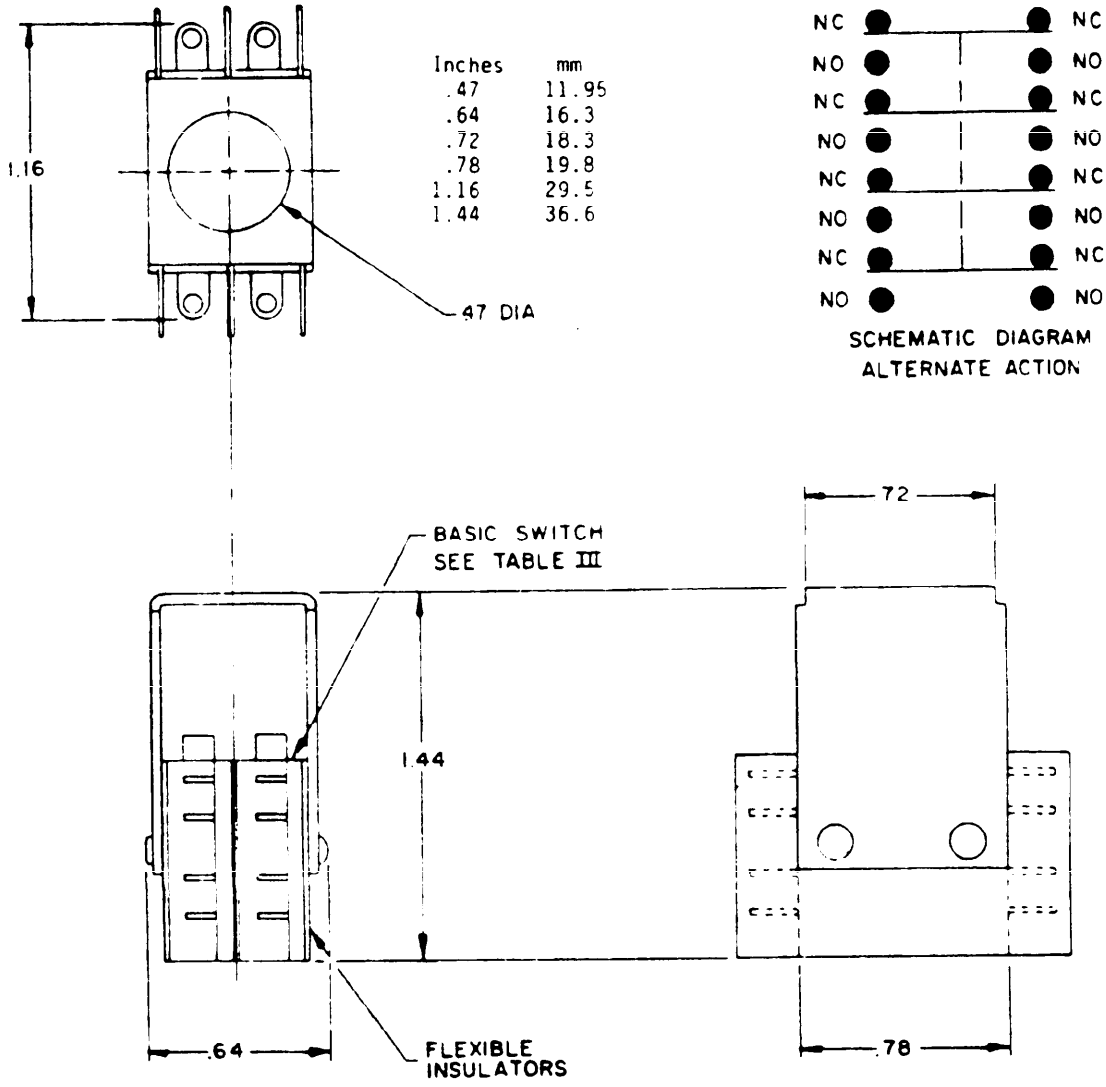

NOTES:
1. Dimensions are in inches.
2. Tolerance is ±.02 (0.5 mm).
3. Metric equivalents are given for general information only.

FIGURE 6. Two four-circuit alternate action switch assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 through 6, and tables I and III.

Classification: See MIL-S-22885/9 or MIL-S-22885/15.

Weight: See table I.

Ⓐ Electrical ratings: See table II.

Ⓐ Operating characteristics: See table I.

TABLE I. Operating characteristics.

Part number	Operating force 1/	Weight
	(pounds)	(ounces)
M22885/26-01	4 max	.60 max
M22885/26-02	6 max	.75 max
M22885/26-03	4 max	.85 max
M22885/26-04	7 max	1.00 max
M22885/26-05	4 max	.85 max
M22885/26-06	7 max	1.00 max

1/ Measurement to be taken at front of lens when complete assembly has been accomplished.

TABLE II. Electrical ratings for basic switches, part numbers MS27217-1 and M8805/77-001.

Load	Sea level		70,000 feet
	28 V dc	115 V ac 60 Hz	28 V dc
	(amperes)	(amperes)	(amperes)
Resistive	10.0	5.0	10.0
Inductive	5.0	5.0	2.0
Lamp	3.0	1.5	---

Terminal marking: Terminals shall be identified as shown on figures 1 through 6.

Basic switches: See table III. They shall be permanently fixed to switch bracket.

Ⓐ Qualification: Required, in accordance with MIL-S-22885/9 or MIL-S-22885/15, using indicator lights in accordance with MIL-S-22885/10 or MIL-S-22885/16.

Ⓐ Group B inspection: Not applicable.

Part number: Consists of the basic number of this specification sheet and a dash number from table III.

Example:

M22885/26-01

Basic document number

Dash no. from table III

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Dash numbers and design characteristics.

Dash number	Type designation	Figure	Circuit characteristics	Operation	Basic switch	
					Part number	Specification number
-01	SL07A04	1	2 two-circuit	Momentary	MS27217-1	MIL-S-8805/7
-02	SL07B04	2	2 two-circuit	Alternate	MS27217-1	MIL-S-8805/7
-03	SL07A04	3	4 two-circuit	Momentary	MS27217-1	MIL-S-8805/7
-04	SL07B04	4	4 two-circuit	Alternate	MS27217-1	MIL-S-8805/7
-05	SL07A08	5	2 four-circuit	Momentary	M8805/77-001	MIL-S-8805/77
-06	SL07B08	6	2 four-circuit	Alternate	M8805/77-001	MIL-S-8805/77

Ⓐ Intended use: Mates with indicator light modules in accordance with MIL-S-22885/10 or MIL-S-22885/16.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS, SH
Air Force - 11, 17
DLA - ES

User activities:
Army - AT, AV, ME, MU
Navy - MC
Air Force - 14, 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1312-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.