
MILITARY SPECIFICATION SHEET

# SWITCH, PUSH BUTTON, ILLUMINATED, SWITCH HOUSINGS FOR, 10 AMPERES, DOUBLE BREAK


© Inactive for new design after 13 January 1986.


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switch housings described herein shall consist of this specification and the latest issue of MIL-S-22885.

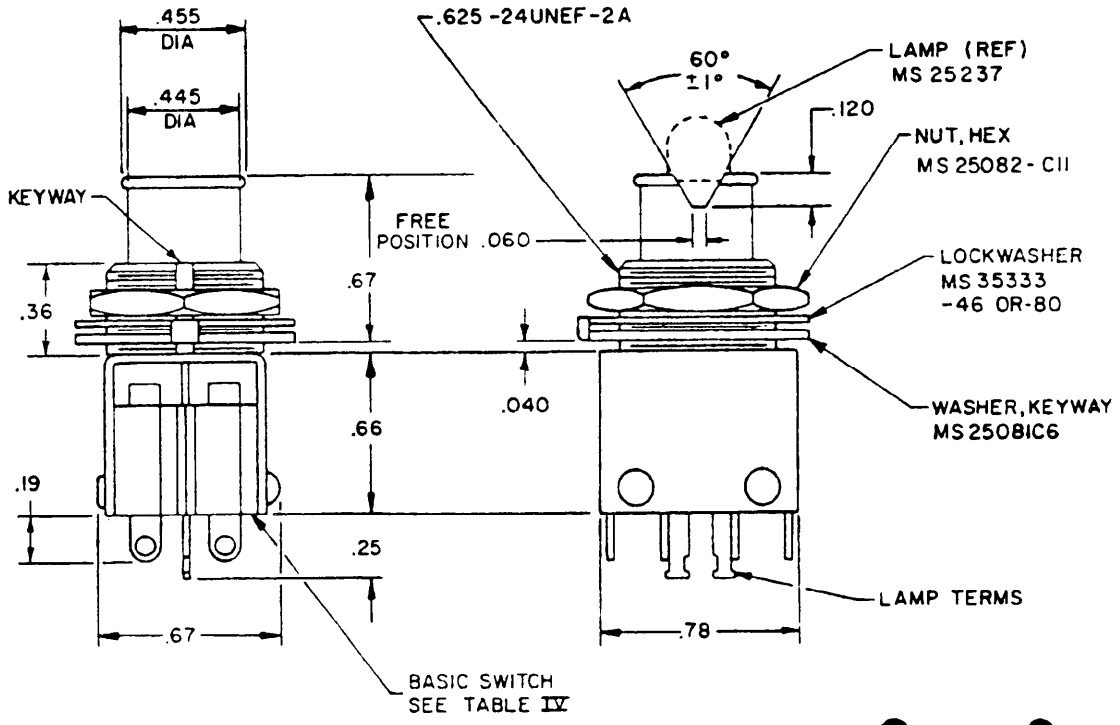


| Inches | mm | Inches | mm |
|---|---|---|---|
| .040 | 1.02 | .445 | 11.30 |
| .060 | 1.52 | .455 | 11.56 |
| .09 | 2.3 | .625 | 15.88 |
| .120 | 3.05 | .66 | 16.8 |
| .19 | 4.8 | .67 | 17.0 |
| .25 | 6.4 | .75 | 19.1 |
| .36 | 9.1 | .78 | 19.8 |



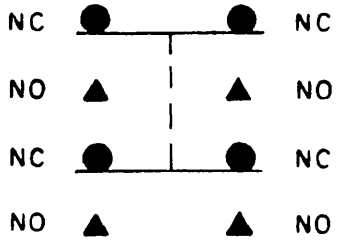


SCHEMATIC DIAGRAM
MOMENTARY ACTION

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.016 (0.41 mm) and ±.02 (0.5 mm).
3. Metric equivalents are given for general information only.

FIGURE 1. Two two-circuit momentary action one light switch housing.


© denotes changes

AMSC N/A




FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-01-19T14:18Z
Check the source to verify that this is the current version before use.

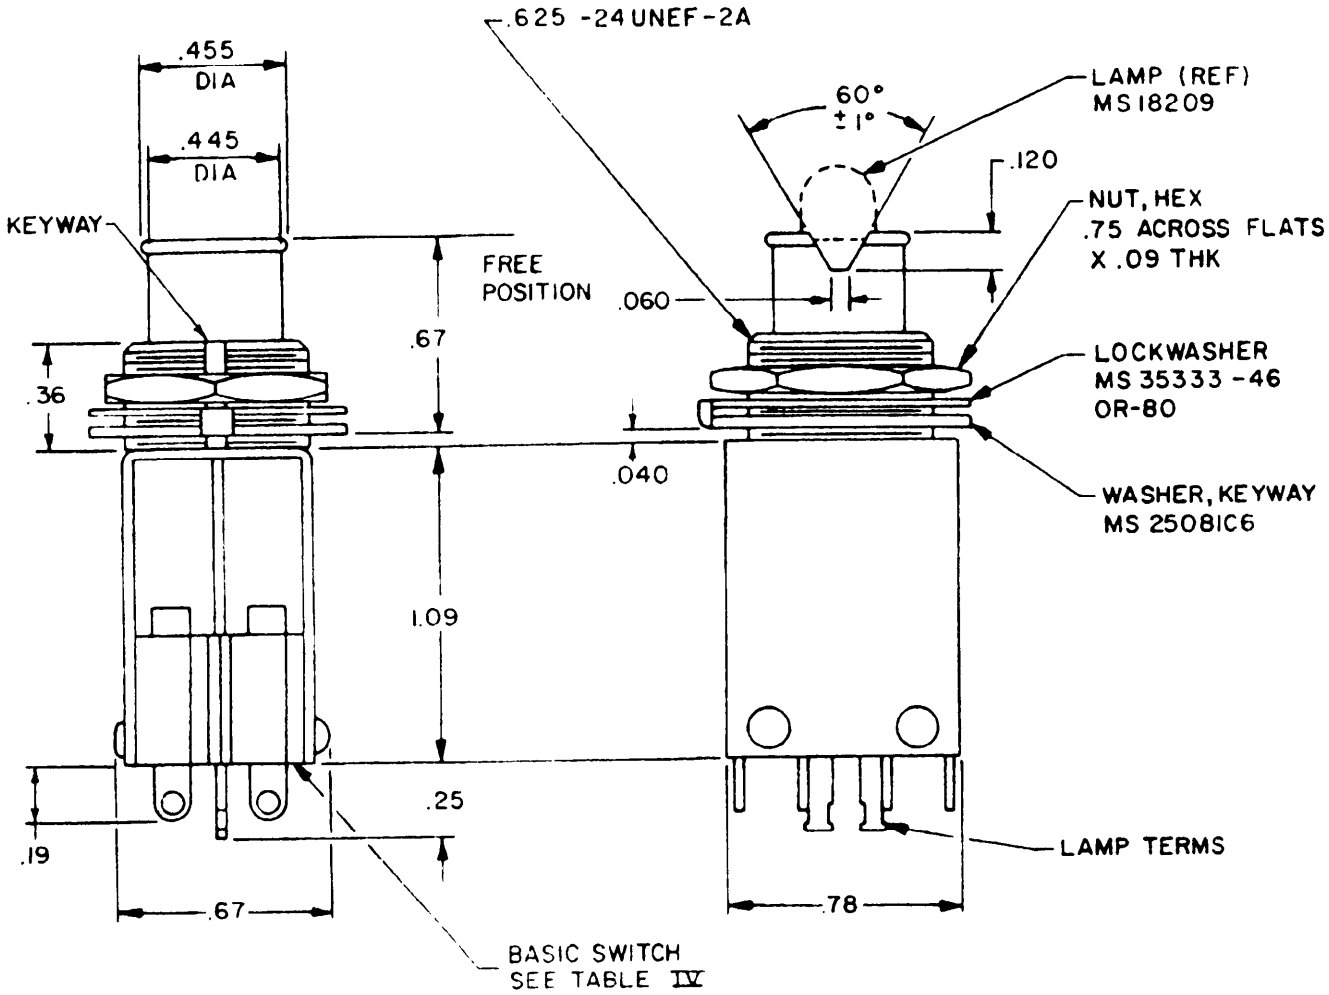


| Inches | mm | Inches | mm |
|---|---|---|---|
| .040 | 1.02 | .445 | 11.30 |
| .060 | 1.52 | .455 | 11.56 |
| .09 | 2.3 | .525 | 15.88 |
| .120 | 3.05 | .67 | 17.0 |
| .19 | 4.8 | .75 | 19.1 |
| .25 | 6.4 | .78 | 19.8 |
| .36 | 9.1 | 1.09 | 27.7 |

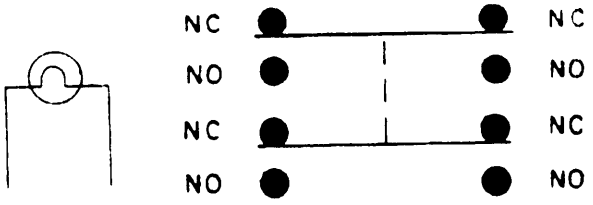



SCHEMATIC DIAGRAM
ALTERNATE ACTION

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.016 (0.41 mm) and ±.02 (0.5 mm).
3. Metric equivalents are given for general information only.


FIGURE 2. Two two-circuit alternate action one light switch housing.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

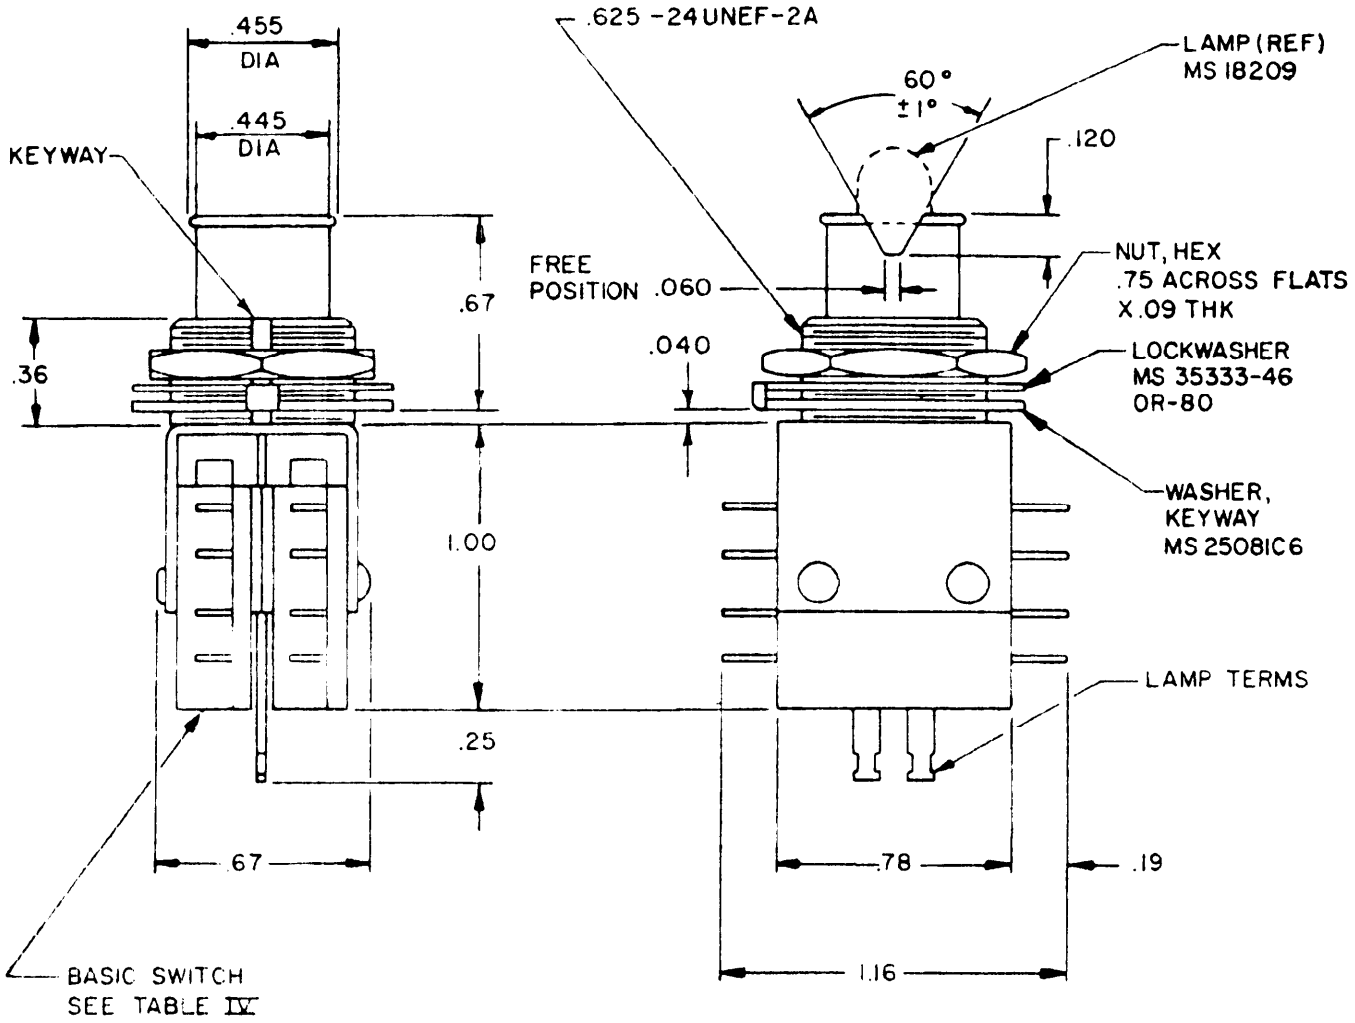


| Inches | mm | Inches | mm |
|---|---|---|---|
| .040 | 1.02 | .445 | 11.30 |
| .060 | 1.52 | .455 | 11.56 |
| .09 | 2.3 | .625 | 15.88 |
| .120 | 3.05 | .67 | 17.0 |
| .19 | 4.8 | .75 | 19.1 |
| .25 | 6.4 | .78 | 19.8 |
| .36 | 9.1 | 1.00 | 25.4 |
| | | 1.16 | 29.5 |



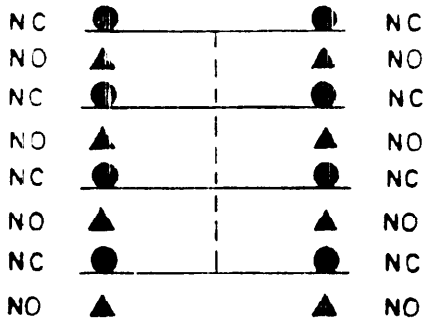



SCHEMATIC DIAGRAM
MOMENTARY ACTION

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.016 (0.41 mm) and ±.02 (0.5 mm).
3. Metric equivalents are given for general information only.

FIGURE 3. Two four-circuit momentary action one light switch housing.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

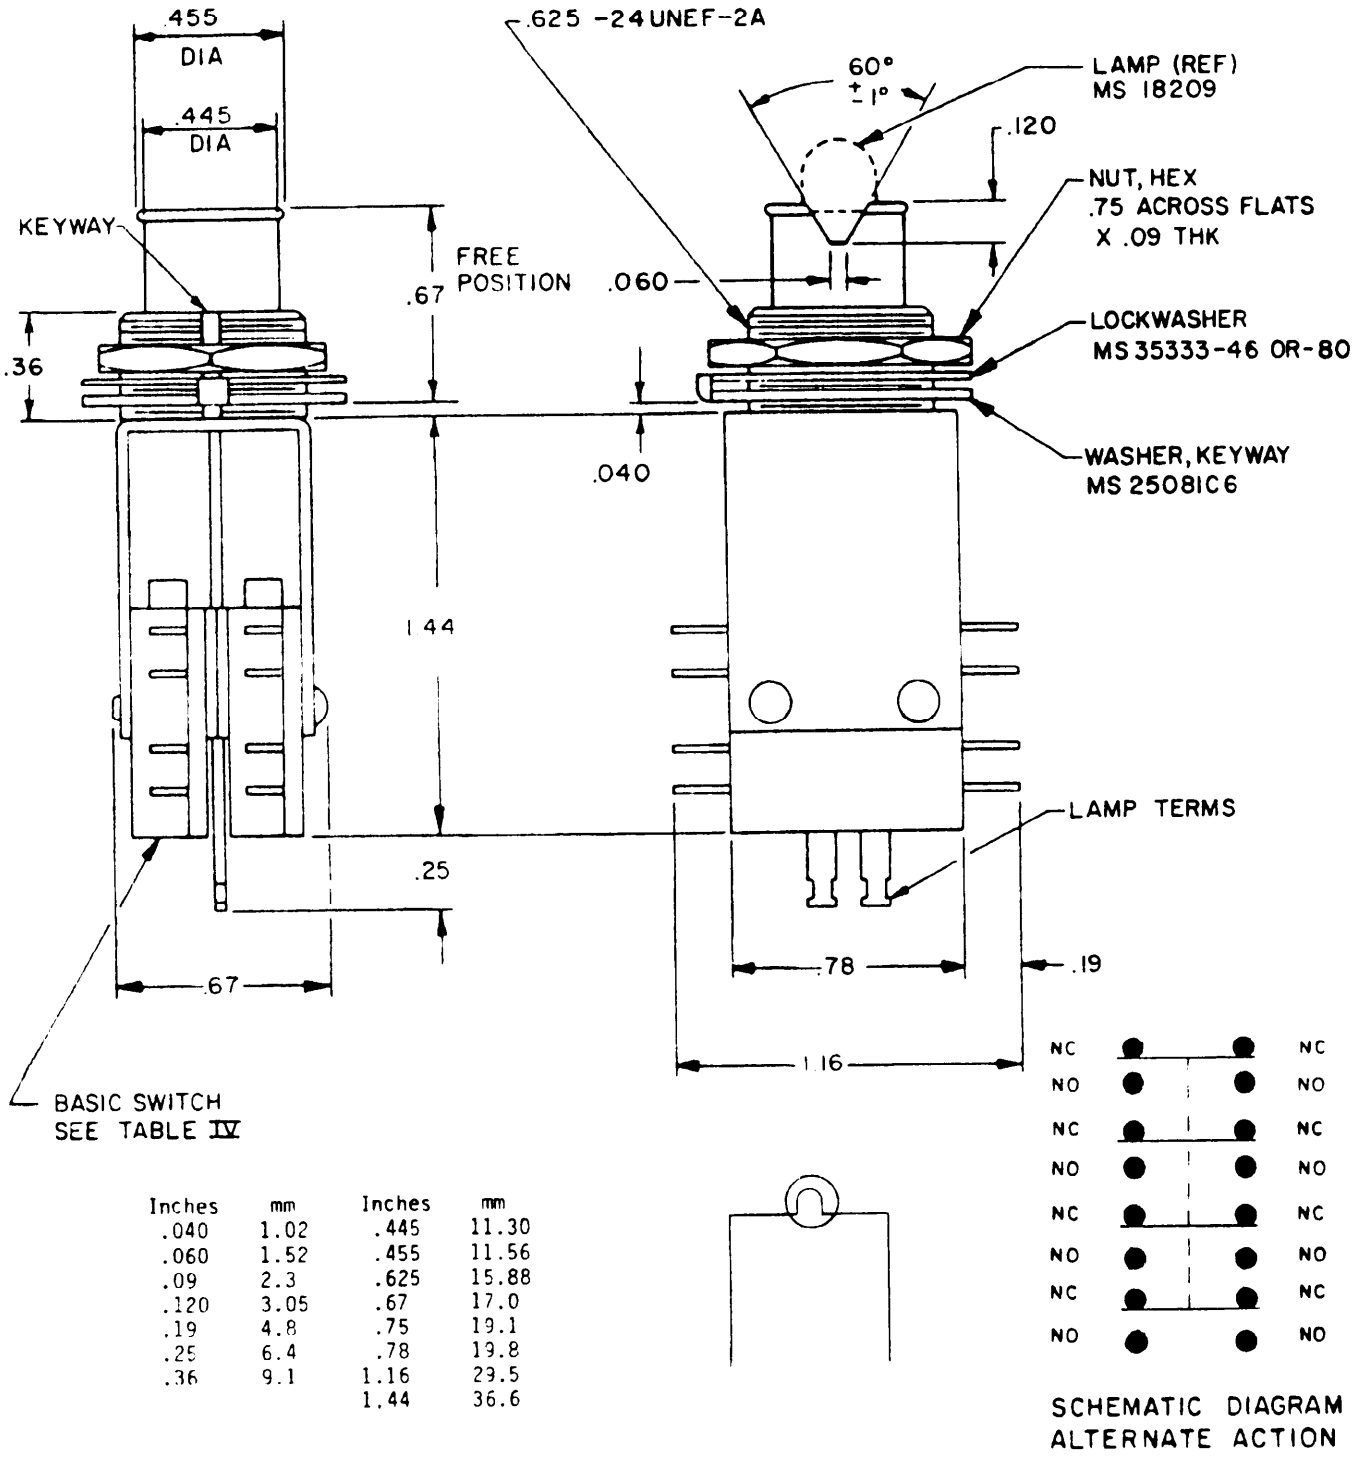


| Inches | mm | Inches | mm |
|---|---|---|---|
| .040 | 1.02 | .445 | 11.30 |
| .060 | 1.52 | .455 | 11.56 |
| .09 | 2.3 | .625 | 15.88 |
| .120 | 3.05 | .67 | 17.0 |
| .19 | 4.8 | .75 | 19.1 |
| .25 | 6.4 | .78 | 19.8 |
| .36 | 9.1 | 1.16 | 29.5 |
| | | 1.44 | 36.6 |

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.016 (0.41 mm) and ±.02 (0.5 mm).
3. Metric equivalents are given for general information only.

FIGURE 4. Two four-circuit alternate action one light switch housing.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 through 4, and tables I and IV.

© Enclosure design: 1 (unsealed).

© Temperature characteristics: -55°C to +55°C (operating), and +71°C (nonoperating).

© Vibration grade: 2 (10 to 500 Hz).

© Operation: A (momentary) or B (alternate).

Weight: See table I.

© Electrical ratings: See table II.

Operating characteristics: See table I.

© TABLE I. Operating characteristics and weight.

| Part number | Pretravel | Overtravel | Operating force | Weight |
|---|---|---|---|---|
| | (inch) | (inch) | (pounds) | (ounces) |
| M22885/27-01 | .093 max | .010 min | 1.5 max | 1.00 max |
| M22885/27-02 | .187 max | .005 min | 6.0 max | 1.20 max |
| M22885/27-03 | .093 max | .010 min | 2.5 max | 1.20 max |
| M22885/27-04 | .187 max | .005 min | 6.0 max | 1.40 max |

TABLE II. Electrical ratings for basic switches, part numbers MS27217-1 and M8805/77-001.

| Load | Sea level | | 70,000 feet |
|---|---|---|---|
| | 28 V dc | 115 V ac 60 Hz | 28 V dc |
| | (amperes) | (amperes) | (amperes) |
| Resistive | 10.0 | 5.0 | 10.0 |
| Inductive | 5.0 | 5.0 | 2.0 |
| Lamp | 3.0 | 1.5 | --- |

Terminal marking: Terminals shall be identified as shown on figures 1 through 4.

Basic switches: See table IV. They shall be permanently fixed to switch bracket.

Lamp retention: The lamp shall be held captive within the switch housing.

Qualification: Table III applies when part numbers M22885/27-01, M22885/27-02, M22885/27-03, and M22885/27-04 are submitted for qualification at the same time.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

TABLE III. Extent of qualification. 1/

| Switch part number | Number of sample units | Tests of MIL-S-22885 | Extent of approval |
|---|---|---|---|
| M22885/27-04<br>M22885/27-01 | 7 each<br>7 each | Groups I, II, III, and VI 2/ | All |
| M22885/27-02<br>M22885/27-03 | 2 each<br>2 each | Group I | |

(C) 1/ If basic switches are not qualified to MIL-S-8805, the entire qualification table of MIL-S-8805 shall apply.

(C) 2/ Group VI - One sample unit only, inductive dc.

(C) Group B inspection: Not applicable.

TABLE IV. Part numbers and design characteristics.

| Part number | Figure | Circuit characteristics | Operation | Basic switch | |
|---|---|---|---|---|---|
| | | | | Part number | Specification number |
| M22885/27-01 | 1 | 2 two-circuit | Momentary | MS27217-1 | MIL-S-8805/7 |
| M22885/27-02 | 2 | 2 two-circuit | Alternate | MS27217-1 | MIL-S-8805/7 |
| M22885/27-03 | 3 | 2 four-circuit | Momentary | M8805/77-001 | MIL-S-8805/77 |
| M22885/27-04 | 4 | 2 four-circuit | Alternate | M8805/77-001 | MIL-S-8805/77 |

Intended use: Switch housing shall accommodate midget-flange-base T-1-3/4 incandescent lamp when mated with lenses in accordance with MIL-S-22885/23.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH
Air Force - 17, 99
DLA - ES

User activities:
Army - AT, AV, ME, MU
Navy - AS, OS, MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1312-2)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.