MILITARY SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED
LENSES, STYLE L15

Ⓑ Inactive for new design after 13 January 1986.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the lenses described herein shall consist of this specification and the latest issue of MIL-S-22885.


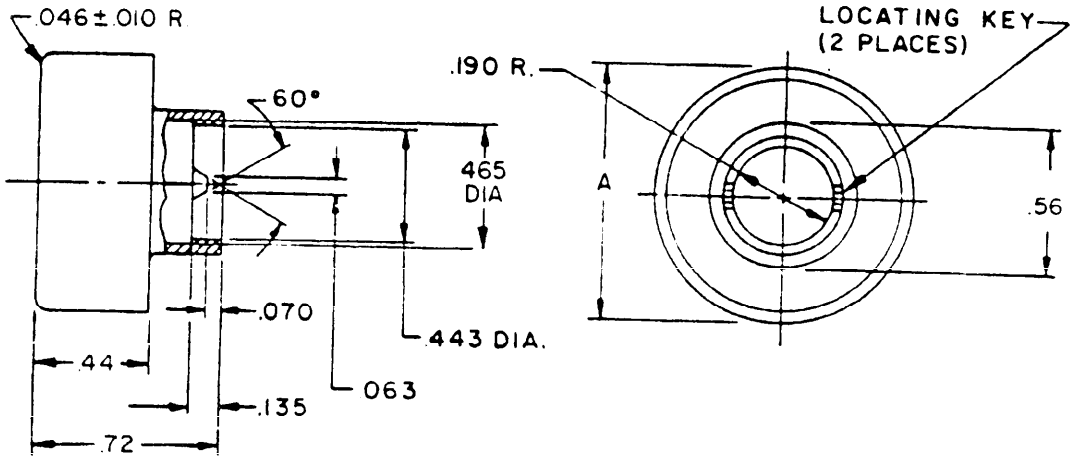


FIGURE 1. Round lens.

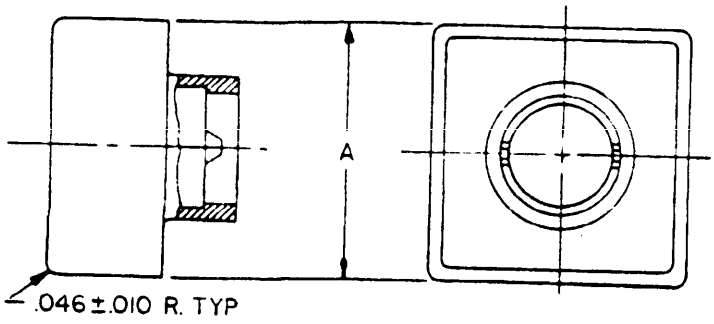

Inches	mm	Inches	mm
.010	0.25	.44	11.2
.046	1.17	.443	11.25
.063	1.60	.465	11.81
.070	1.78	.56	14.2
.135	3.43	.72	18.29
.190	4.83		

FIGURE 2. Square lens.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.016 (0.41 mm) on three place decimals and ±.02 (0.51 mm) on two place decimals.
3. Internal design of lens is optional.
4. The detail shown in figure 1 is applicable to figure 2.
5. Metric equivalents are given for general information only.

Ⓑ denotes changes

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

FSC 5930

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2, and table I.

(B) Classification: See MIL-S-22885/27.

Material: See table I.

Thermal shock: 71°C maximum temperature (nonoperating).

Weight: 0.300 ounce, maximum.

TABLE I. Part numbers and design characteristics.

Part number 1/	Type designation	Dimension A ±.02(0.51 mm)	Fig.	Color coordinates			Brightness 2/	Material specification
		inches 3/			"x"	"y"		
M22885/28-01	L15BT	.62(15.75)	1	Blue	.113 ±.050	.200 ±.050	7 ftL	L-P-380
M22885/28-02	L15GT	.62(15.75)	1	Green	.210 ±.050	.658 ±.050	30 ftL	L-P-349
M22885/28-03	L15RT	.62(15.75)	1	Red	.696 ±.020	.302 ±.020	60 ftL	L-P-349
M22885/28-04	L15AT	.62(15.75)	1	Amber	.602 ±.020	.395 ±.020	130 ftL	L-P-380
M22885/28-05	L15YT	.62(15.75)	1	Yellow	.565 ±.020	.425 ±.020	160 ftL	L-P-349
M22885/28-06	L15WT	.62(15.75)	1	White	.527 ±.030	.413 ±.030	190 ftL	L-P-349
M22885/28-07	L15BT	.75(19.05)	1	Blue	.113 ±.050	.200 ±.050	7 ftL	L-P-380
M22885/28-08	L15GT	.75(19.05)	1	Green	.210 ±.050	.658 ±.050	30 ftL	L-P-349
M22885/28-09	L15RT	.75(19.05)	1	Red	.696 ±.020	.302 ±.020	60 ftL	L-P-349
M22885/28-10	L15AT	.75(19.05)	1	Amber	.602 ±.020	.395 ±.020	130 ftL	L-P-380
M22885/28-11	L15YT	.75(19.05)	1	Yellow	.565 ±.020	.425 ±.020	160 ftL	L-P-349
M22885/28-12	L15WT	.75(19.05)	1	White	.527 ±.030	.413 ±.030	190 ftL	L-P-349
M22885/28-13	L15BT	.81(20.57)	1	Blue	.113 ±.050	.200 ±.050	7 ftL	L-P-380
M22885/28-14	L15GT	.81(20.57)	1	Green	.210 ±.050	.658 ±.050	30 ftL	L-P-349
M22885/28-15	L15RT	.81(20.57)	1	Red	.696 ±.020	.302 ±.020	60 ftL	L-P-349
M22885/28-16	L15AT	.81(20.57)	1	Amber	.602 ±.020	.395 ±.020	130 ftL	L-P-380
M22885/28-17	L15YT	.81(20.57)	1	Yellow	.565 ±.020	.425 ±.020	160 ftL	L-P-349
M22885/28-18	L15WT	.81(20.57)	1	White	.527 ±.030	.413 ±.030	190 ftL	L-P-349
M22885/28-19	L15BT	1.12(28.45)	1	Blue	.113 ±.050	.200 ±.050	7 ftL	L-P-380
M22885/28-20	L15GT	1.12(28.45)	1	Green	.210 ±.050	.658 ±.050	30 ftL	L-P-349
M22885/28-21	L15RT	1.12(28.45)	1	Red	.696 ±.020	.302 ±.020	60 ftL	L-P-349
M22885/28-22	L15AT	1.12(28.45)	1	Amber	.602 ±.020	.395 ±.020	130 ftL	L-P-380
M22885/28-23	L15YT	1.12(28.45)	1	Yellow	.565 ±.020	.425 ±.020	160 ftL	L-P-349
M22885/28-24	L15WT	1.12(28.45)	1	White	.527 ±.030	.413 ±.030	190 ftL	L-P-349
M22885/28-25	L15BT	.62(15.75)	2	Blue	.113 ±.050	.200 ±.050	7 ftL	L-P-380
M22885/28-26	L15GT	.62(15.75)	2	Green	.210 ±.050	.658 ±.050	30 ftL	L-P-349
M22885/28-27	L15RT	.62(15.75)	2	Red	.696 ±.020	.302 ±.020	60 ftL	L-P-349
M22885/28-28	L15AT	.62(15.75)	2	Amber	.602 ±.020	.395 ±.020	130 ftL	L-P-380
M22885/28-29	L15YT	.62(15.75)	2	Yellow	.565 ±.020	.425 ±.020	160 ftL	L-P-349
M22885/28-30	L15WT	.62(15.75)	2	White	.527 ±.030	.413 ±.030	190 ftL	L-P-349
M22885/28-31	L15BT	.75(19.05)	2	Blue	.113 ±.050	.200 ±.050	7 ftL	L-P-380
M22885/28-32	L15GT	.75(19.05)	2	Green	.210 ±.050	.658 ±.050	30 ftL	L-P-349
M22885/28-33	L15RT	.75(19.05)	2	Red	.696 ±.020	.302 ±.020	60 ftL	L-P-349
M22885/28-34	L15AT	.75(19.05)	2	Amber	.602 ±.020	.395 ±.020	130 ftL	L-P-380
M22885/28-35	L15YT	.75(19.05)	2	Yellow	.565 ±.020	.425 ±.020	160 ftL	L-P-349
M22885/28-36	L15WT	.75(19.05)	2	White	.527 ±.030	.413 ±.030	190 ftL	L-P-349

1/ Part numbers listed are for lenses without legends.
2/ Brightness values are approximate, based on center .25-inch diameter of lens, at 2200°K.
3/ Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 20260-19T14:18Z
Check the source to verify that this is the current version before use.

Ⓑ Intended use: Lens shall be capable of mating with switch housing in accordance with MIL-S-22885/27.

Ⓑ NOTE: Lens cap not capable of retaining lamp. (See MIL-S-22885/27, switch housing for lamp retention.)

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV, ME, MU
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1312-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:18Z
Check the source to verify that this is the current version before use.