
MILITARY SPECIFICATION SHEET

Ⓐ


SWITCH, PUSH BUTTON, ILLUMINATED, MOMENTARY AND ALTERNATE ACTION (4 PDT - 5 AMPERES)

The complete requirements for procuring the switch described herein shall consist of this document and the latest issue of Specification MIL-S-22885.


This specification is approved for use by all Departments and Agencies of the Department of Defense.

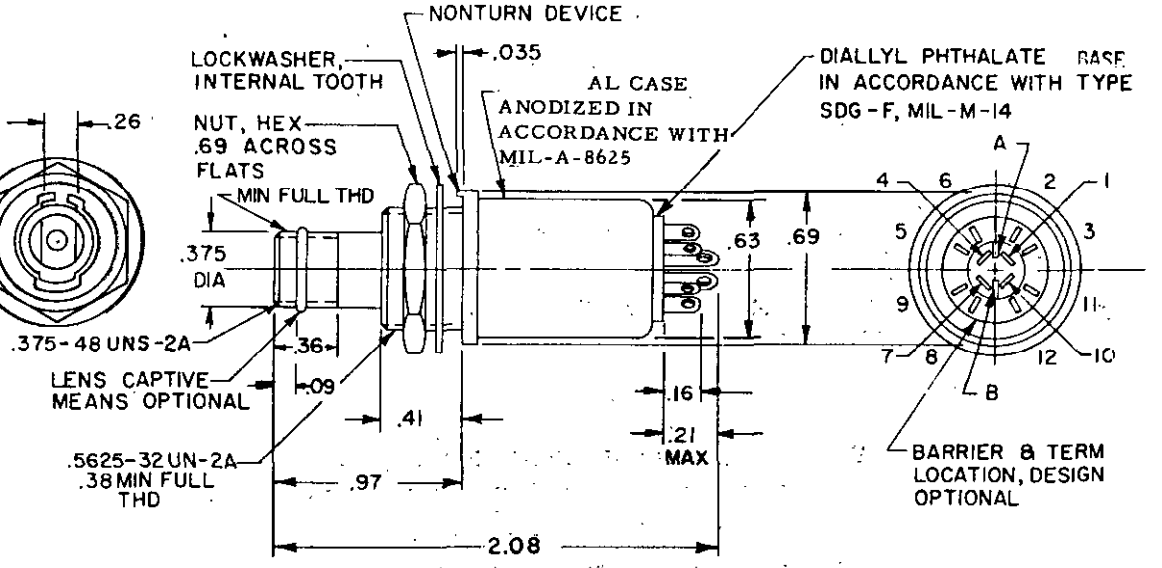

INCHES	MM	INCHES	MM
.002	.05	.38	9.65
.035	.89	.41	10.41
.09	2.29	.5625	14.29
.16	4.06	.567	14.40
.21	5.33	.63	16.00
.26	6.60	.69	17.53
.318	8.08	.97	24.64
.36	9.14	2.08	52.83
.375	9.53		

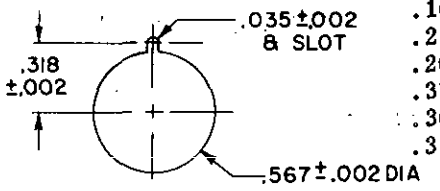

RECOMMENDED PANEL MTG HOLE DIMS



SCHEMATIC DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.01 (.25 mm) and ±.005 (.13 mm).
3. All terminals shall be insulated from the case.
4. All terminals shall be permanently identified as shown on the diagram.
5. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:19Z
Check the source to verify that this is the current version before use.

FSC 5930

REQUIREMENTS:

Ⓐ Dimensions and configuration: See figure and table III.

Ratings:
Electrical - See table I.
Operating force - 2-1/2 ±1 lbs.
Plunger travel - .13 inch, approximately.

Ⓐ TABLE I. Electrical ratings.

Load	28 Vdc	115 Vac
	(amperes)	(amperes)
Resistive	2	2
Inductive	0.5	0.5
Lamp	0.5	0.5

Contact resistance:
Switch contacts - Shall not exceed 40 milliohms.

Ⓐ Qualification: Table II applies when M22885/37-33 and M22885/37-03 are submitted for qualification at the same time.

Ⓐ TABLE II. Extent of qualification.

Switch	Tests of MIL-S-22885	Extent of approval
M22885/37-33 (24 sample units)	All tests of table X	All
M22885/37-03 (10 sample units)	(4) Group II of table X (2) Group VII of table X Group VI of table X (2) Inductive dc (2) Inductive ac	
M22885/37-03 thru 07 (10 sample units)	2 ea Group VIII, table X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:19Z
Check the source to verify that this is the current version before use.

Ⓐ Part number: M22885/37- (dash number from table III).

Ⓐ TABLE III. Part number and operating characteristics.

Part number M22885/37-	Lens M22885/39-	Circuit characteristics	Operation	Lens type
01 1/	-	4 PDT	Momentary	Snap-in
02 1/	-		Alternate action	
03	01 (yellow)		Momentary	
04	02 (white)			
05	03 (red)			
06	04 (green)			
07	05 (blue)			
08	06 (yellow)			
09	07 (white)			
10	08 (red)			
11	09 (green)			
12	10 (blue)			
13	11 (yellow)			
14	12 (white)			
15	13 (red)			
16	14 (green)			
17	15 (blue)			
18	16 (yellow)			
19	17 (white)			
20	18 (red)			
21	19 (green)			
22	20 (blue)			
23	21 (yellow)			
24	22 (white)			
25	23 (red)			
26	24 (green)			
27	25 (blue)			
28	26 (yellow)			
29	27 (white)			
30	28 (red)			
31	29 (green)			
32	30 (blue)		Momentary	
33	01 (yellow)		Alternate action	
34	02 (white)			
35	03 (red)			
36	04 (green)			
37	05 (blue)			
38	06 (yellow)			
39	07 (white)			
40	08 (red)			
41	09 (green)			
42	10 (blue)			
43	11 (yellow)			
44	12 (white)			
45	13 (red)			
46	14 (green)			
47	15 (blue)			
48	16 (yellow)			
49	17 (white)			
50	18 (red)			
51	19 (green)			
52	20 (blue)			
53	21 (yellow)			
54	22 (white)			
55	23 (red)	4 PDT	Alternate action	Snap-in

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:19Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE III. Part number and operating characteristics. - Continued

Part number M22885/37-	Lens M22885/39-	Circuit characteristics	Operating	Lens type
56	24 (green)	4 PDT	Alternate action	Snap-in
57	25 (blue)	↕	↕	↕
58	26 (yellow)			
59	27 (white)			
60	28 (red)			
61	29 (green)			
62	30 (blue)	4 PDT	Alternate action	Snap-in

1/ These are switch housings that do not contain lens.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, SL
Navy - SH, OS
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - ME, AT, AV, WC
Navy - MC, AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5930-0824-12)

U.S. GOVERNMENT PRINTING OFFICE-1972-714-167/7810

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:19Z
Check the source to verify that this is the current version before use.