INCH-POUND


MIL-S-22885/86
23 April 1993
SUPERSEDING
MIL-S-22885/8F
26 June 1973


MILITARY SPECIFICATION SHEET

SWITCH, PUSHBUTTON, ILLUMINATED,
MOMENTARY AND PUSH-PULL, 2 CIRCUIT, 5 AMPERES


This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-S-22885

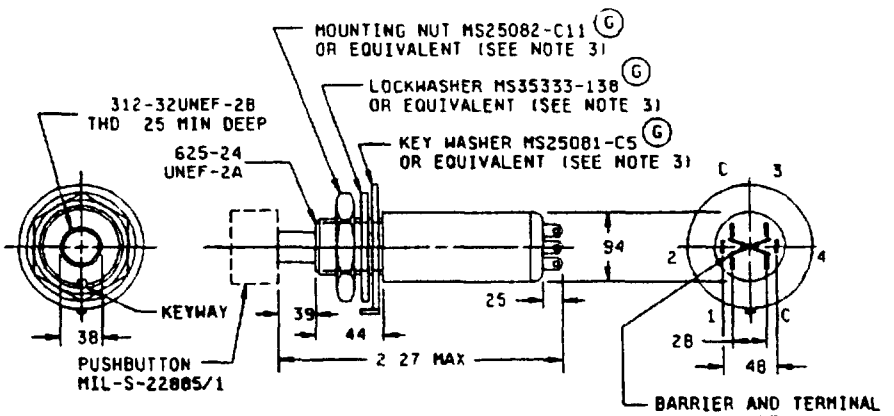



RECOMMENDED
PANEL MTG HOLE DIMENSION



SCHEMATIC DIAGRAM

Inches	mm
.003	0.08
.005	0 13
.015	0.38
.125	3.18
.25	6.4
.28	7 1
.38	9.7
.39	9.9
.44	11.2
.48	12 2
.500	12 70
.625	15.88
.94	23.9
2.27	57.7

NOTES.
1. Dimensions are in inches. Metric equivalents are given for general information only
2. Unless otherwise specified, tolerance is ±.03 (0 8 mm)
(G) 3. Alternative base metals and protective finishes, as approved by the qualifying activity, may be utilized for hexagon nut, lock washer, and key washer material Dimensions shall be in accordance with the referenced hardware specifications

FIGURE 1 Dimensions and configuration

(G) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202640-19T14:14Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS

Dimensions and configuration See figure 1 Switch housings accept screw-in pushbuttons in accordance with MIL-S-22885/1 Pushbutton accommodates one midget flange base T-1-3/4 incandescent lamp

Enclosure design 2 (dripproof)

Temperature characteristic: -40°C to +55°C

(G) Vibration grade. 2 (10 to 500 Hz, 10 g peak).

Operation A (momentary) or C (push-pull).

Display type C (colored background)

(G) Material

Case Aluminum, clear anodized

Weight 1 43 ounces maximum

Operating characteristics

Operating force

Momentary action switches

Initial 4 ±1 pounds

After endurance testing 2 5 pounds minimum

(G) Push-pull switches 1 5 pounds, approximately

Plunger travel 080 ± 020 inch.

Shock

Method I: Applicable, except maximum allowable contact opening is 500 microseconds

Method II (high impact): Applicable

Electrical ratings See table I

Qualification Table II applies when both momentary and push-pull action switches are submitted for qualification at the same time

Part or Identifying Number (PIN) M22885/8- (dash number from table III)

TABLE I Electrical ratings

Load	28 V dc (amperes)	115 V ac (amperes)
Resistive	5	5
Inductive	3	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:14Z
Check the source to verify that this is the current version before use.

(G) Table II. Extent of qualification

Switch sample	Tests of MIL-S-22885 qualification inspection table	Extent of approval
M22885/8-03	Groups I through VII	All PIN's
M22885/8-52	Groups I, II, VI 2/, and VII	
M22885/1-01 through -05 1/ (2 each color)	Group VIII	

1/ Pushbuttons may be installed on housings submitted to the tests of groups II through VII
2/ Inductive dc load only

TABLE III Dash numbers

Dash number	Pushbutton M22885/1-	Operation
01	None 1/	Momentary
02	None 1/	Push-pull
03	01 (yellow, .81 round)	Momentary
04	02 (white, .81 round)	Momentary
05	03 (red, .81 round)	Momentary
06	04 (green, .81 round)	Momentary
07	05 (blue, .81 round)	Momentary
08	06 (yellow, .75 round)	Momentary
09	07 (white, .75 round)	Momentary
10	08 (red, .75 round)	Momentary
11	09 (green, .75 round)	Momentary
12	10 (blue, .75 round)	Momentary
13	11 (yellow, .67 round)	Momentary
14	12 (white, .67 round)	Momentary
15	13 (red, .67 round)	Momentary
16	14 (green, .67 round)	Momentary
17	15 (blue, .67 round)	Momentary
18	16 (yellow, .62 round)	Momentary
19	17 (white, .62 round)	Momentary
20	18 (red, .62 round)	Momentary
21	19 (green, .62 round)	Momentary
22	20 (blue, .62 round)	Momentary
23	21 (yellow, .88 square)	Momentary
24	22 (white, .88 square)	Momentary
25	23 (red, .88 square)	Momentary
26	24 (green, .88 square)	Momentary
27	25 (blue, .88 square)	Momentary

See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:14Z
Check the source to verify that this is the current version before use.

TABLE III Dash numbers - Continued

Dash number	Pushbutton M22885/1-	Operation
28	01 (yellow, .81 round)	Push-pull
29	02 (white, .81 round)	Push-pull
30	03 (red, .81 round)	Push-pull
31	04 (green, 81 round)	Push-pull
32	05 (blue, 81 round)	Push-pull
33	06 (yellow, 75 round)	Push-pull
34	07 (white, 75 round)	Push-pull
35	08 (red, 75 round)	Push-pull
36	09 (green, 75 round)	Push-pull
37	10 (blue, 75 round)	Push-pull
38	11 (yellow, 67 round)	Push-pull
39	12 (white, 67 round)	Push-pull
40	13 (red, 67 round)	Push-pull
41	14 (green, 67 round)	Push-pull
42	15 (blue, 67 round)	Push-pull
43	16 (yellow, 62 round)	Push-pull
44	17 (white, .62 round)	Push-pull
45	18 (red, .62 round)	Push-pull
46	19 (green, 62 round)	Push-pull
47	20 (blue, .62 round)	Push-pull
48	21 (yellow, .88 square)	Push-pull
49	22 (white, .88 square)	Push-pull
50	23 (red, .88 square)	Push-pull
51	24 (green, 88 square)	Push-pull
52	25 (blue, 88 square)	Push-pull

1/ These are switch housings that do not include pushbutton

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Air Force - 99
DLA - ES

User activities
Army - AR, AT, AV, ME
Navy - AS, MC, SH
Air Force - 19

Preparing activity
Navy - EC

Agent.
DLA - ES

(Project 5930-1478)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:14Z
Check the source to verify that this is the current version before use.