INCH-POUND

A-A-55084
21 October 1992

COMMERCIAL ITEM DESCRIPTION

POCKET, AMMUNITION MAGAZINE

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-P-43312.

Abstract. This document covers one type of ammunition pocket made from nylon duck, nylon tape, nylon webbing and miscellaneous hardware. The pocket is used to carry various types of ammunition. The pocket may be carried suspended from the shoulder or looped from the equipment belt.

Salient characteristics. The ammunition magazine pocket shall be water repellent treated, 5-1/2 inches wide, 3-1/4 inches in depth and 10-3/4 inches in height, fabricated from Camouflage Green 483 nylon duck, Camouflage Green 483 nylon tape, and Camouflage Green 483 nylon webbing. A snap fastener is inserted in the front flap for closing.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Material. The **nylon duck cloth** shall be 12.5 ounces per square yard, water repellent treated, conforming to class 2, color Camouflage Green 483 of MIL-C-43375. The cut edges of the nylon cloth are subject to fraying during the process of handling the cut parts during fabrication of the pocket case. It has been found that fusing the cut edges of the cloth will prevent fraying.

The 3 inch wide **webbing** for the belt loop shall conform to type VIIIa, color Camouflage Green 483 of MIL-W-4088. The webbing shall be resin impregnated in accordance with class R of MIL-W-27265. The 1 inch wide webbing for the inside strap shall conform to type III, color Camouflage Green 483 of MIL-W-43668. The 2 inch wide webbing for the sling shall conform to type VIIIB, color Camouflage Green 483.

The **nylon tape** for binding shall conform to type III, 1 inch wide of MIL-T-5038. The tape shall be dyed Camouflage Green 483.

The **polyester thread** shall conform to type I, class 1, sub-class B of V-T-285. The thread shall be dyed Camouflage Green 483 and shall show fastness to weathering equal to or better than the standard sample. When no standard sample is available, the thread shall show "good" fastness to weathering.

The **slide loop** shall be steel, black enamel finish, conforming to class 3, style 2, size 2 inch (construction A) of MIL-L-3851.

The **strap fastener** loop shall be steel wire, black enamel finish, conforming to type III, style E, 2-1/16 by 1/4 inch of MIL-L-11075.

The **grommet and spur washer** shall be brass, black chemical finish, conforming to type III, class 3, size No. 0 of MIL-G-16491.

The **snap fastener** shall conform to style 1, finish 2 of MIL-F-10884 and MS 27977. The components shall consist of a socket conforming to MS 27977-3B, a stud eyelet base conforming to MS 27977-8B, and a washer conforming to MS 27977-10B.

All ends of nylon webbing shall be fused. The apparatus used to fuse the webbing ends shall be capable of providing sufficient heat to provide a smooth edge with the ends of the webbing yarns all fused together. Location marks shall not be drilled except for locating the grommet and snap fastener.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Sizes and Measurements. The finished measurements shall conform to the tolerances as follows: (see figures 1 & 1a)

1/8 inch	± 1/16 inch.
More than 1/8 inch, but less than 2 inches	± 1/8 inch.
2 inches or more, but less than 10 inches	± 1/4 inch.
10 inches or more	± 3/8 inch.

HEIGHT	WIDTH	DEPTH
10-3/4 inch (± 3/8 inch)	5-1/2 inch (± 1/4 inch)	3-1/4 inch (± 1/4 inch)

Label/marking. The identification marking shall be applied in the location shown (see figure 2) and shall conform to type IV, class 5 of DDD-L-20. The marking "US" shall be applied in the size characters and location indicated (see figure 2) and shall conform to type IV, class 9 of DDD-L-20. Fastness of class 9 marking shall be as specified for class 5 marking.

Patterns. Patterns will be developed by the contractor to meet the specified finished requirements.

Workmanship. After completion, the finished and assembled pocket shall be thoroughly cleaned, and all loose thread, lint, and foreign matter removed. The quality of the pocket shall conform to the levels established by this document.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Ammunition pocket lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The pocket shall be examined for the defects listed below. The lot size shall be expressed in unit of pockets. The sample unit shall be one pocket. The inspection level for visual examination shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.0 for major defects and 6.5 for total (major and minor combined) defects.

Defects. The pocket shall be examined for the following defects: any hole, cut, tear, color not as specified; any spot or stain (outside); thread ends not removed; label missing, incorrect, or illegible; measurement of item not as specified. Webbing and tape not firmly and tightly woven, edges frayed or scalloped. Webbing ends not fused. Hardware, general broken or malformed, failing to serve intended purpose; corroded areas, burr or sharp edges. Size, type, class, or style not as specified. Open seams, raw edges, wrong seam or incorrect stitch type.

Dimensional Examination. The finished pockets shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one pocket; the inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

End Item Performance Testing. The pocket shall be examined for fit of the magazine into the pocket and the closure of the flap. Pocket too small, i.e, magazine fails to fit properly within the pocket. The magazine shall be inserted into the pocket with the open end face down whether worn on the right or the left. It shall be possible to insert two, M-16, 20 round magazines within the pocket without effort other than that necessary to over come friction between the pocket and the magazine.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

Custodian:
Army - GL

User Activity:
Navy - MC

Review Activity:
Army - MD

Civil Agency Coordinating Activity:
GSA-FSS

Preparing Activity:
DLA-CT

Project No.
8465-0103

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.

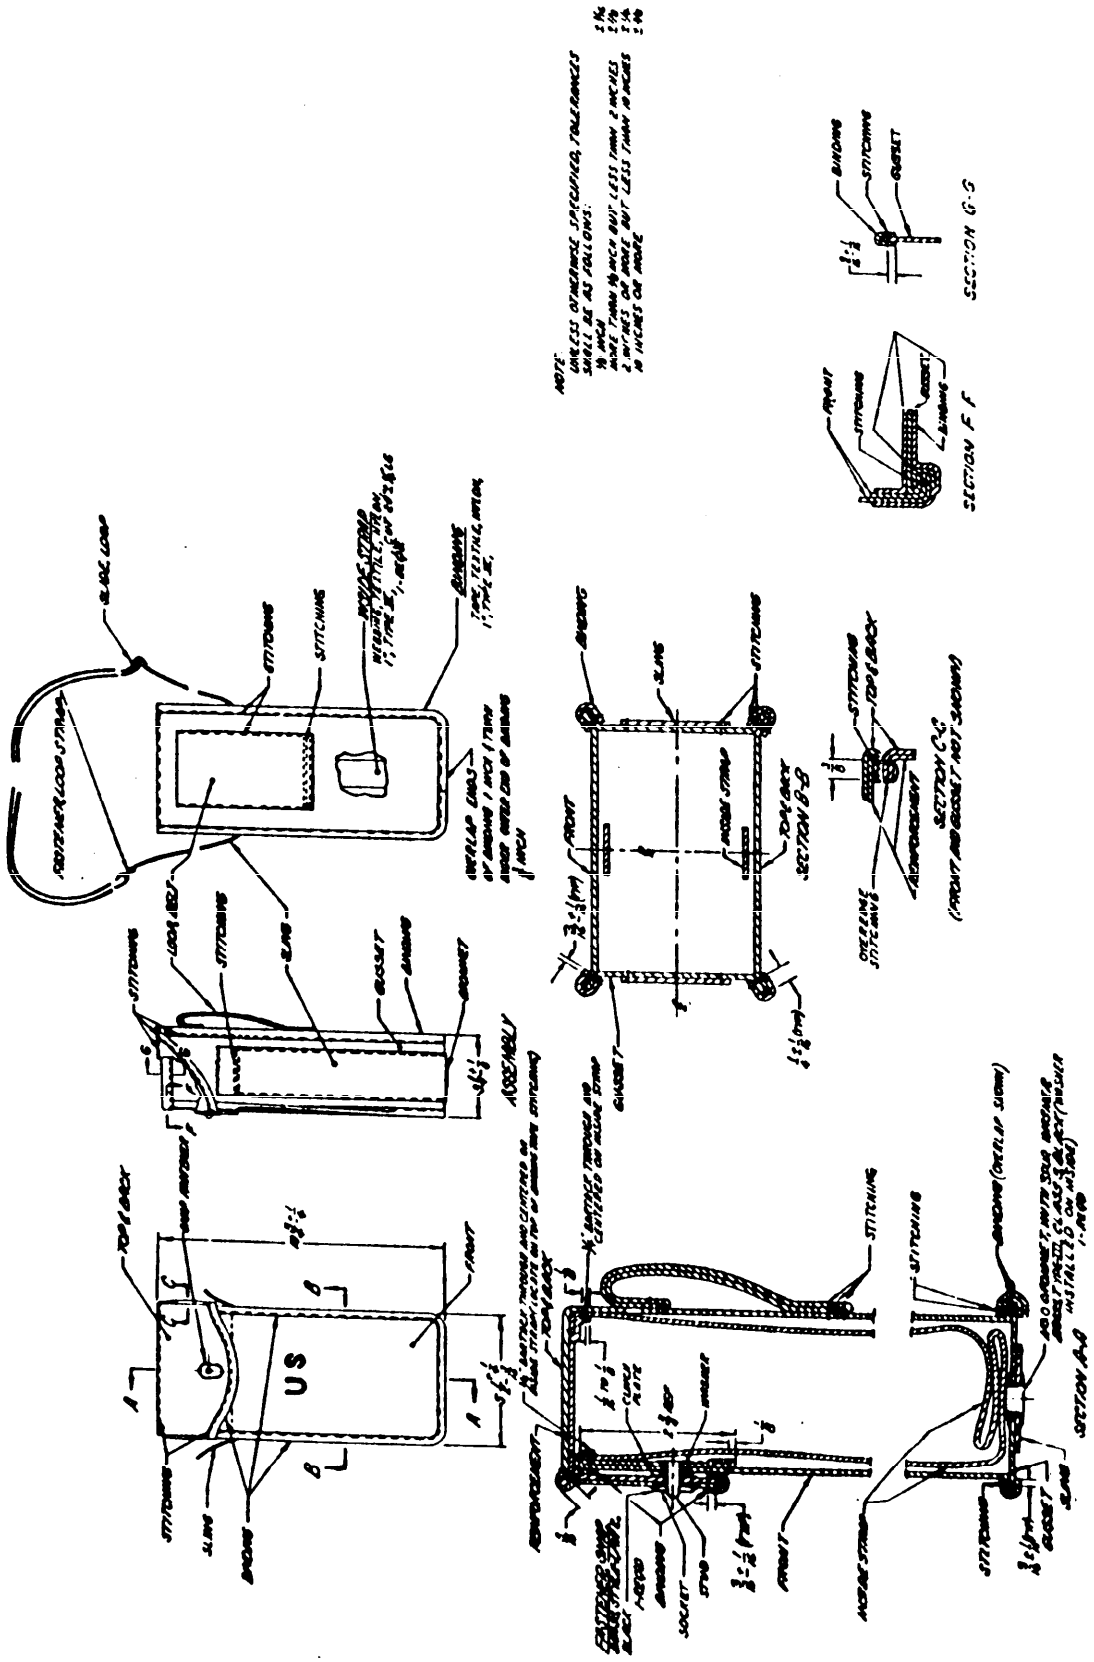


FIGURE 1 - POCKET, AMMUNITION MAGAZINE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

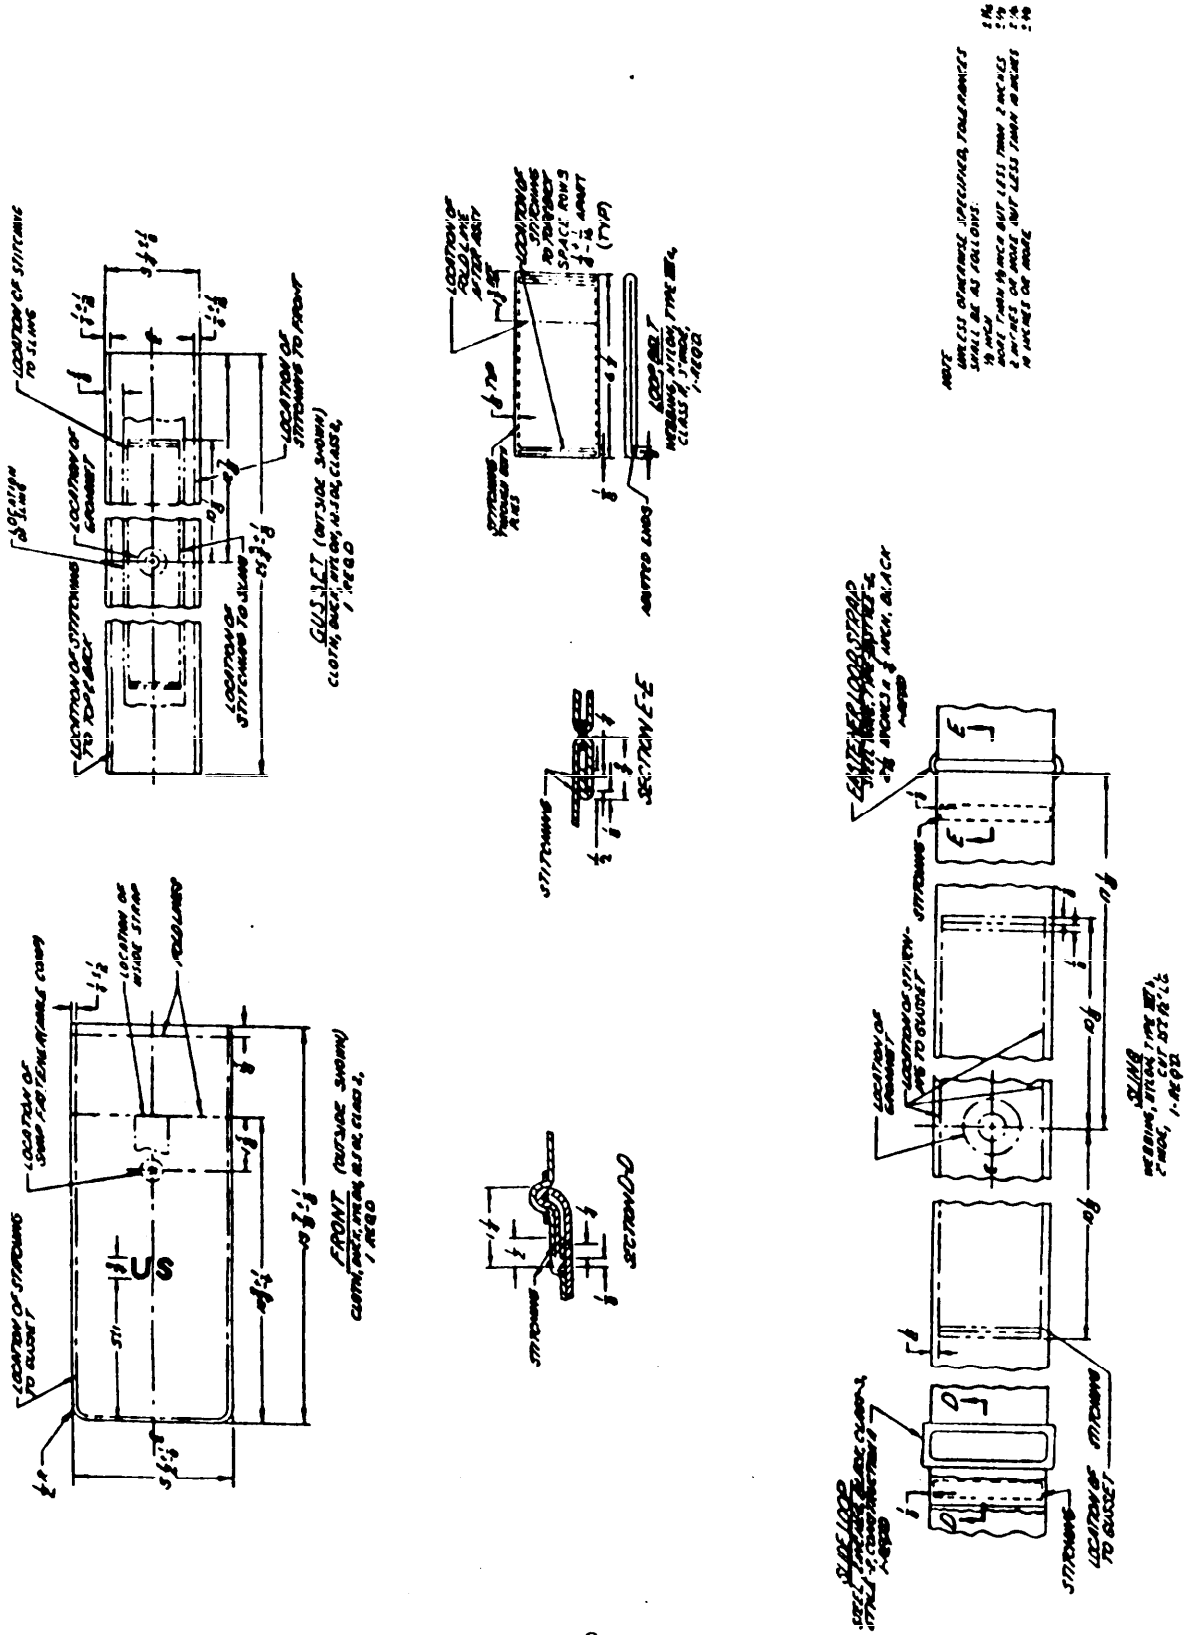


FIGURE 1A. POCKET, AMMUNITION MAGAZINE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

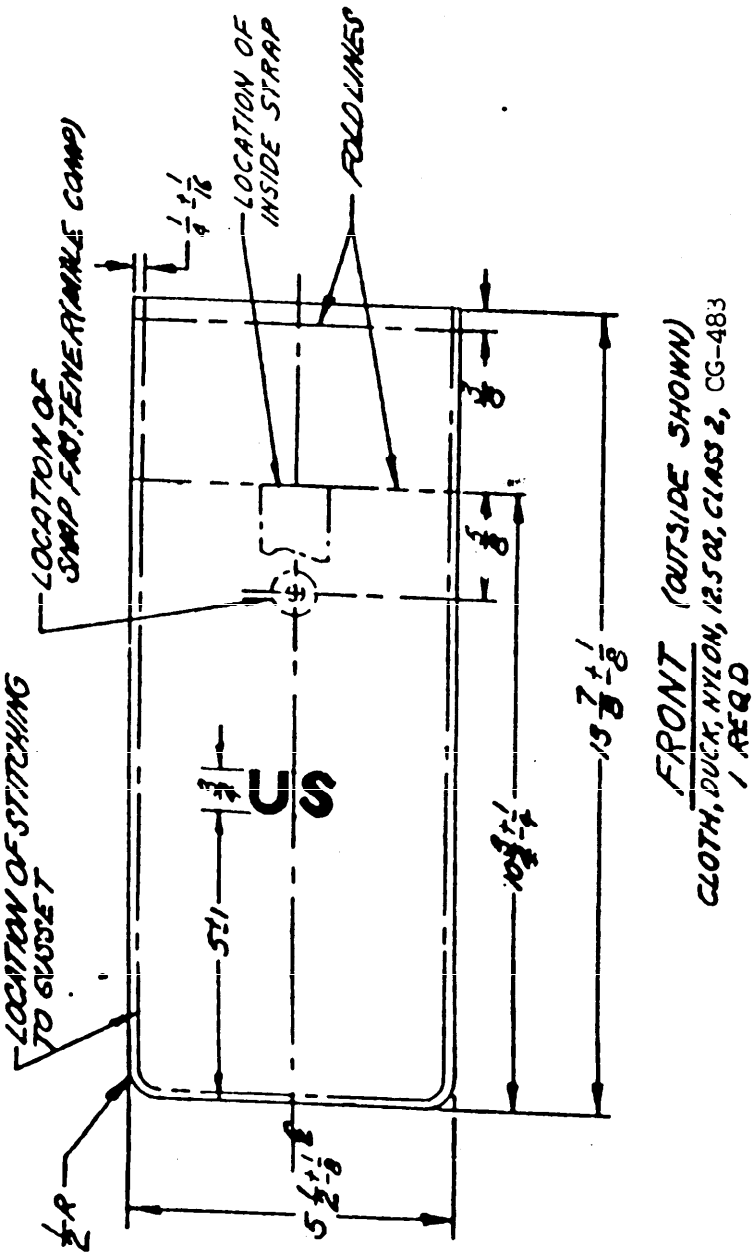


FIGURE 2 - POCKET, AMMUNITION MAGAZINE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2. 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-55084	2. DOCUMENT DATE (YYMMDD) 92-10-21

3. DOCUMENT TITLE
POCKET, AMMUNITION MAGAZINE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b. TELEPHONE (Include Area Code) (1) Commercial: 215-737-8105 (2) AUTOVON: 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P.O. box 8419 Philadelphia, PA 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:42Z
Check the source to verify that this is the current version before use.