PPP-D-00650a(GSA-FSS)
October 13, 1967
SUPERSEDING
Int. Fed. Spec. PPP-D-00650(GSA-FSS)
September 10, 1964

INTERIM FEDERAL SPECIFICATION

DRAWER, SMALL PARTS STORAGE

(KIT, KNOCKED-DOWN)

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers requirements for kits of knocked-down fiberboard storage drawers and shelves.

1.2 Classification.

1.2.1 Types and sizes. The drawer kits shall be of the following types and sizes as specified (see 6.2). A plus or minus tolerance of 1/8 inch will be permitted in all storage drawer dimensions.

Type I - Drawer kit for the conversion of 36 inch wide bin openings.

Type II - Drawer kit for the conversion of 30 inch wide bin openings.

Size 15 - For the conversion of 15 inch deep bin openings; outside dimensions of storage drawers 5-1/4 inches wide by 3 inches high by 14-13/16 inches deep.

Size 18 - For the conversion of 18 inch deep bin openings; outside dimensions of storage drawers 5-1/4 inches wide by 3 inches high by 17-13/16 inches deep.

Size 24 - For the conversion of 24 inch deep bin openings; outside dimensions of storage drawer 5-1/4 inches wide by 3 inches high by 23-13/16 inches deep.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

UU-L-49 - Labels; Paper, Gummed.
PPP-B-636 - Box, Fiberboard.
PPP-B-001163 - Box, Corrugated Fiberboard, High Compression Strength, Weather-Resistant, Wax and Resin Impregnated.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:50Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material and construction.

3.1.1 Drawer blanks. The drawer blanks shall be type SW, grade 200 fiberboard in accordance with PPP-B-001163 except the corrugation shall be "B" flute and the minimum flute height plus the facing thickness shall be 3/32 inch. The blanks shall be die cut in accordance with figure 1. The outer rim and material from the tab slot of the blank shall not be stripped from the blank but packed in the shipping container intact for removal at the point of final assembly of the drawer.

3.1.2 Shelf units. The shelf units shall be type DW, grade 400 fiberboard in accordance with PPP-B-001163 except the minimum flute heights plus the facing thickness shall be as follows:

"A" flute - 3/16 inch.
"B" flute - 3/32 inch.
"C" flute - 9/64 inch.

The shelf units shall be scored 4 inches (plus or minus 1/8 inch) from each end to provide the required height when units are erected (see figure 5). The dimensions of the knocked-down units and the resultant dimensions when units are erected shall be as specified in Table I. A plus or minus tolerance of 1/8 inch will be permitted in all dimensions.

TABLE I. Dimensions of Shelf Units (inches)

	Knocked-down	erected (outside dimensions)		
		wide	high	deep
Type I kits				
Kit size 15	25-7/8 x 14-13/16	18	4	14-13/16
Kit size 18	25-7/8 x 17-13/16	18	4	17-13/16
Kit size 24	25-7/8 x 23-13/16	18	4	23-13/16
Type II kits				
Kit size 15				
Shelf Unit A	25-7/8 x 14-13/16	18	4	14-13/16
Shelf Unit B	19-7/8 x 14-13/16	12	4	14-13/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:50Z
Check the source to verify that this is the current version before use.

Kit size 18				
Shelf Unit C	25-7/8 x 17-13/16	18	4	17-13/16
Shelf Unit D	19-7/8 x 17-13/16	12	4	17-13/16
Kit size 24				
Shelf Unit E	25-7/8 x 23-13/16	18	4	23-13/16
Shelf Unit F	19-7/8 x 23-13/16	12	4	23-13/16

3.1.3 Drawer dividers. Drawer dividers shall be constructed in accordance with figure 3. They shall be of type SW, grade 200, B-flute corrugated fiberboard in accordance with PPP-B-001163 except the minimum flute height plus the facing thickness shall be as specified in 3.1.1.

3.1.4 Pressure sensitive labels. Pressure sensitive labels shall be type II, style I, in accordance with UU-L-49. The labels shall be 3-1/4 inches by 2 inches.

3.1.5 Assembly instruction drawing. The instructions for the assembly of the kit shall be in the form of a drawing containing all the information shown in figures 1,2,3,4 and 5. The instruction drawing shall be 8 inches by 10-1/2 inches, minimum.

3.2 Kit contents.

3.2.1 Type I kits. Each type I kit shall contain the following:

a. Twenty-four drawer blanks (drawers KD)
b. Six shelf units (KD) of dimensions required by size of kit (see table I)
c. Twenty-four pressure sensitive labels.
d. One hundred and twenty drawer dividers (five per drawer) for sizes 18 and 24 kits; ninety-six (four per drawer) for size 15 kits.
e. One assembly instruction drawing.

3.2.2 Type II kits. Each type II kit shall contain the following.

a. Twenty drawer blanks (drawers KD).
b. Six shelf units (KD) of dimensions required by size of kit; three each of the two units applicable to the kit size (see table I).
c. Twenty pressure sensitive labels.
d. One hundred drawer dividers (five per drawer) for sizes 18 and 24 kits; eighty (four per drawer) for size 15 kits.
e. One assembly instruction drawing.

3.3 Assembly. The drawer blanks and shelves shall be furnished flat for packing into shipping containers.

3.4 Workmanship. The workmanship shall be of a quality to produce drawers and shelves that are satisfactory in function, serviceability and appearance. The cutting, scoring and slotting shall be executed so that the set-up items will meet the quality level established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105 except where otherwise specified herein.

4.2.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards or, if none, in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:50Z
Check the source to verify that this is the current version before use.

4.2.2 Inspection of end items. Inspection of the kits shall be as specified in sub-paragraphs hereunder. The inspection level shall be S-4 and the acceptable quality level 4.0 percent defective. The lot size shall be expressed in units of kits for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this inspection shall be one completely assembled kit of each type and size. A defective unit shall be any kit which fails to meet three or more of the requirements examined herein.

4.2.2.1 Drawers. Drawer blanks shall be assembled into drawers in accordance with the procedure outlined in the assembly instruction drawing. The assembled drawer shall be of the applicable dimensions specified in 1.2.1. Drawer components shall fit snugly with no movement once tabs "A" and "B" have been fitted in the corresponding slots. The tabs shall not project beyond the face of the bottom of the drawer. The cut-out at front of drawer shall be centered between the drawer sides.

4.2.2.2 Shelf units. Knock-down shelves shall be measured for conformance to the applicable knock-down dimensions specified in table I. The shelves shall then be erected in accordance with the assembly instruction drawing. The end flap shall be folded 90 degrees at the score line. In this position the shelves shall be measured for conformance to the applicable erected dimensions specified in table I.

4.2.2.3 Pressure sensitive labels. The labels from the kits shall be examined for size, type and style specified in 3.1.4.

4.2.2.4 Drawer dividers. The drawer dividers shall be examined for size, shape and type in accordance with 3.1.3 and figure 3.

4.2.2.5 Assembly instruction drawings. Assembly instruction drawings shall be examined for compliance with 3.1.5.

4.2.2.6 Contents of kits. The contents of the kits shall be visually examined and counted to determine compliance with 3.2.1 or 3.2.2 as applicable.

4.2.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. The inspection level shall be S-4 and the acceptable quality level 4.0 percent defective. The lot size shall be the number of units in the inspection lot. The sample unit shall be one shipping container fully prepared for delivery.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Levels A, B or C. The number of pressure sensitive labels, as required by the kit, shall be stacked flat and placed in a snug fitting kraft envelope. The envelope shall be secured against accidental opening. No other component requires packaging as all components are of water resistant material.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Components of the kit shall be placed in a fiberboard box conforming to PPP-B-001163, style RSC. The voids within the container shall be filled with suitable cushioning material or die cut pads of fiberboard, to prevent movement of the components. The assembly instructions shall be placed in the container on top of the other components so that it will be the first item available upon opening.

5.2.2 Level B. Packing shall conform to 5.2.1 except that the container shall be of type CF, class domestic, grade 200 of PPP-B-636.

5.2.3 Level C. Components of the kit shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest rate for such supplies.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:50Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The assembled drawers are intended to be used within open shelving units for the storage of small parts or slow moving items. Shelf assembly units are included to permit complete utilization of 18 inch high openings.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number and date of this specification.
b. Type and size of kit required (1.2.1).
c. Selection of applicable level of packing (5.2).
d. Special marking required. (5.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:50Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:50Z
Check the source to verify that this is the current version before use.

PLAN VIEW OF DIE CUT DRAWER

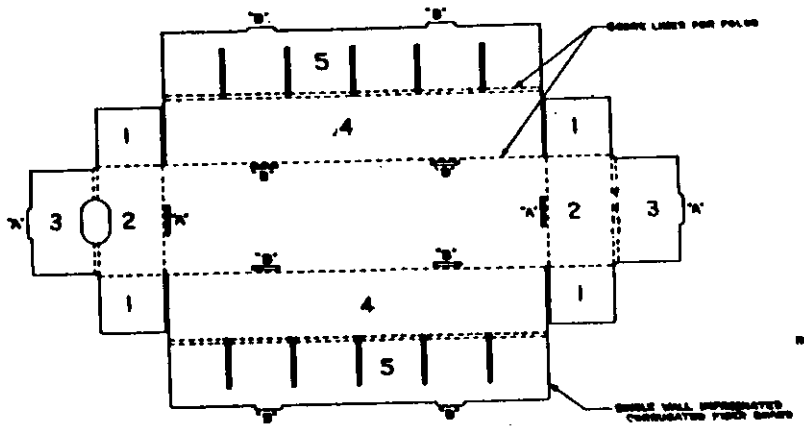


fig no. 1

STEP NO. 3

1. INSERT DIVIDERS AS REQUIRED
2. AFFIX LABEL TO DRAWER

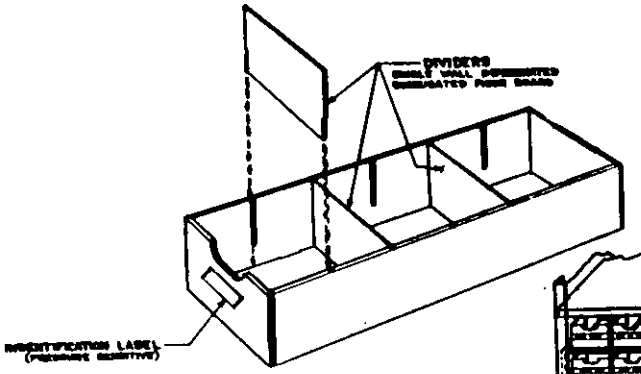


fig no. 3

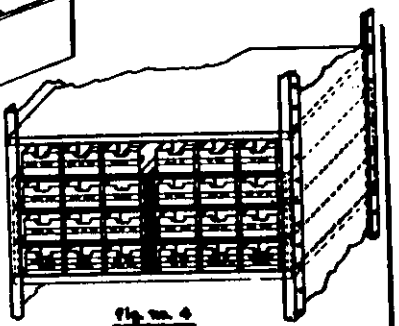


fig no. 4


TYPICAL BIN OPENING
W/DRAWER UNIT INSTALLED

STEP NO. 1

1. FOLD PIECES NO.1, 90 DEGREES UP
2. FOLD PIECES NO.2, 90 DEGREES UP
3. FOLD PIECES NO.3, 180 DEGREES AND LOCK TAB "A" INTO SLOT "A"

STEP NO. 2

1. FOLD PIECES NO.4, 90 DEGREES UP
2. FOLD PIECES NO.5, 180 DEGREES AND LOCK TAB "B" INTO SLOT "B"

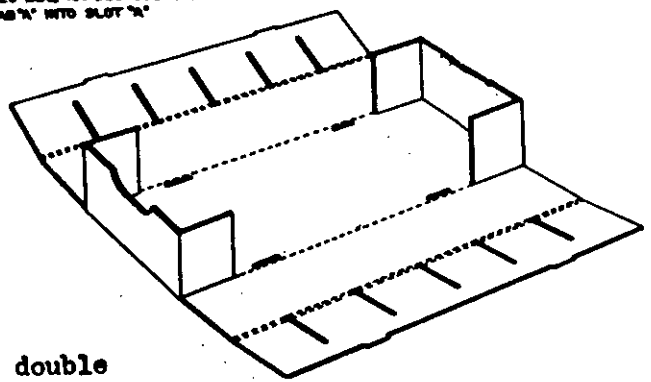

Prefold double score before setting up tray

fig no. 2

SHELF UNIT ASSEMBLY

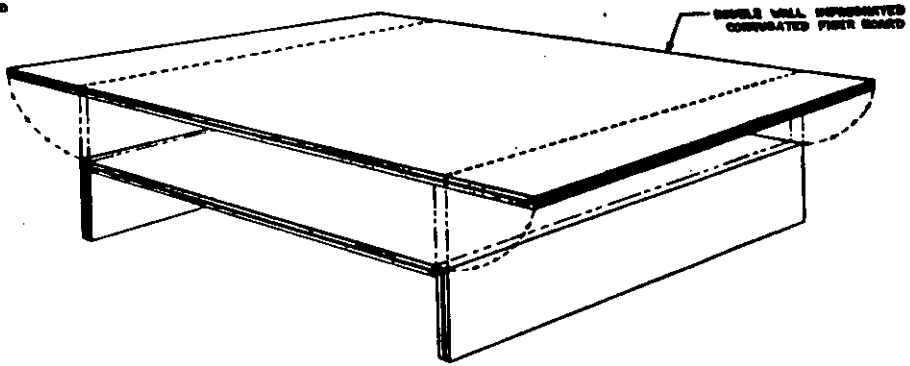


fig no. 5