INCH-POUND


MIL-DTL-55302/97D
17 November 2004
SUPERSEDING
MIL-C-55302/97C(CR)
12 January 1981

DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: CONTACTS, HERMAPHRODITIC, CRIMP REMOVABLE FOR WIRE (STRANDED)

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.

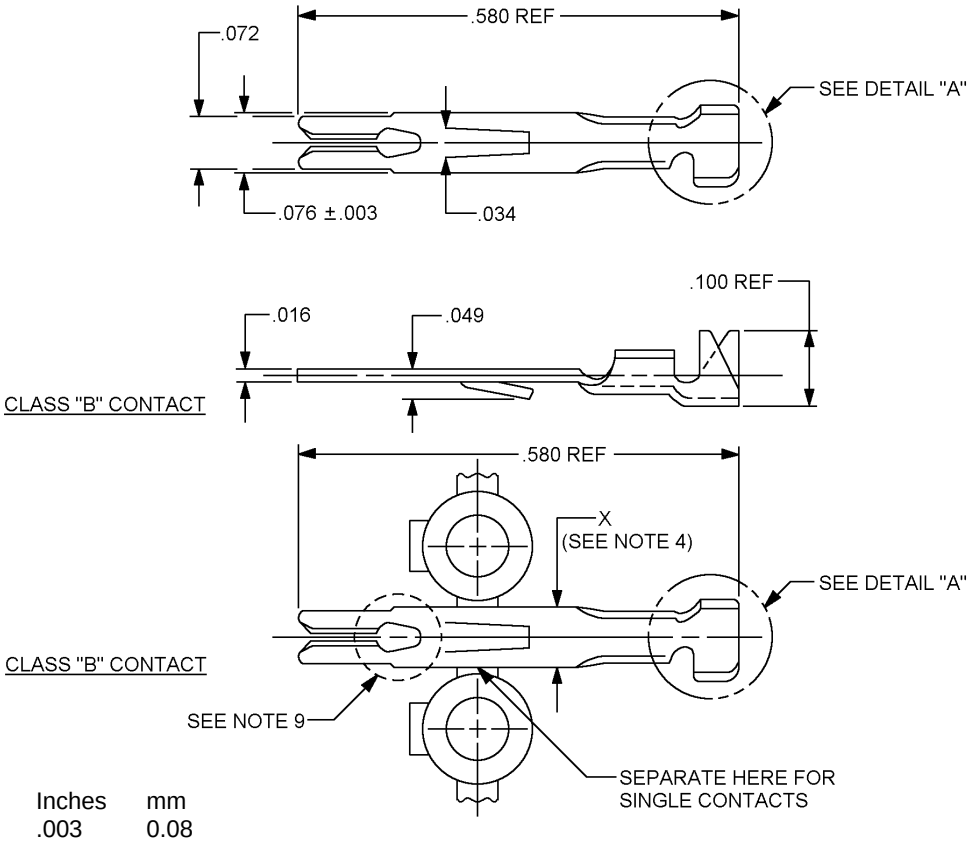

Inches	mm
.003	0.08
.016	0.41
.034	0.86
.048	1.22
.049	1.24
.072	1.83
.076	1.93
.100	2.54
.580	14.73


FIGURE 1. Contact, hermaphroditic, crimp removable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

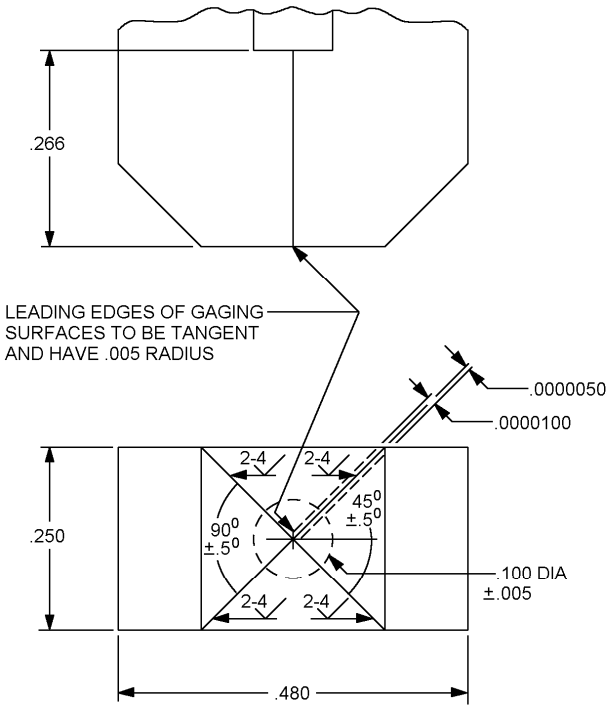

MATERIAL: MEDIUM ALLOY STEEL BONDED TITANIUM CARBIDE, ROCKWELL-C-67-69

CONFIGURATION "A" TEST GAGE

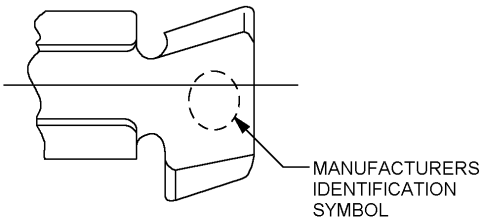

DETAIL "A"

Inches	mm
.0000050	0.000127
.0000100	0.000254
.001	0.03
.005	0.13
.250	6.35
.266	6.79
.480	12.19

Manufacturer's identification symbol shall be imprinted approximately as shown.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerances shall be ± .005 (0.13 mm) unless otherwise specified. All dimensions are for parts after plating.
4. Trip area no to exceed width of contact across retaining lance area X.
5. Contact crimp for use with (AWG) wire range 22 to 30 stranded type E in accordance with MIL-DTL-16878.
6. Remove all burrs and sharp edges .001 inch (0.03 mm) maximum.
7. Crimp tool M22520/17-02.
8. Contact insertion and removal tool M81969/5-01 and M81969/4-02.
9. Contact relief hole configuration, optional.

FIGURE 1. Contact, hermaphroditic, crimp removable - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Material: Phosphor bronze in accordance with ASTM B139, composition A.

Plating: The contact plating shall be gold in accordance with ASTM B488, type II code D, class 1.27, over nickel plating in accordance with SAE-AMS-QQ-N-290, class 2, 30 to 150 microinches in contact engagement area for .120 inch minimum (see figure 1). The remainder of the contact shall be gold in accordance with ASTM B488, type II, code D, class .25 minimum, over nickel plating in accordance with SAE-AMS-QQ-N-290, class 2, 30 to 150 microinches.

Contact separating force: See configuration A.

Polished steel gage from unplated contacts: 1 ounce minimum.

Plated gold over nickel contacts (contact to contact): 2 to 10 ounces.

Current rating, maximum: 5 amperes, 22 AWG wire.

Identification of contact:

Contacts shall be permanently imprinted with manufacturer's symbol for purpose of identifying manufacturer's product (see detail A).

Application: Contact, hermaphroditic, crimp removable for wire (stranded), are to be used with connectors, MIL-DTL-55302/93, MIL-DTL-55302/94, and MIL-DTL-55302/102.

Part or Identifying Number (PIN):	M55302/97-01, supplied loose for hand crimping installation. M55302/97-02, supplied on a reel containing 3000 contacts for automatic crimping machine installation.

All contacts shall be tested and qualified in accordance with the applicable connector specification sheet.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/93	ASTM B139
MIL-DTL-55302/94	ASTM B488
MIL-DTL-55302/102	SAE-AMS-QQ-N-290
MIL-DTL-16878	

Previous changes. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4440-016)

Review activities:
Army – AR, AT, AV, CR4, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.