INCH-POUND


MIL-PRF-55339/53A
w/Amendment 1
12 February 2017
SUPERSEDING
MIL-PRF-55339/53A
30 April 2015

PERFORMANCE SPECIFICATION

ADAPTER, CONNECTOR, ELECTRICAL, COAXIAL, RADIO FREQUENCY,
PIN CONTACT (WITHIN SERIES SMA), RIGHT ANGLE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall
consist of this specification sheet and MIL-PRF-55339.

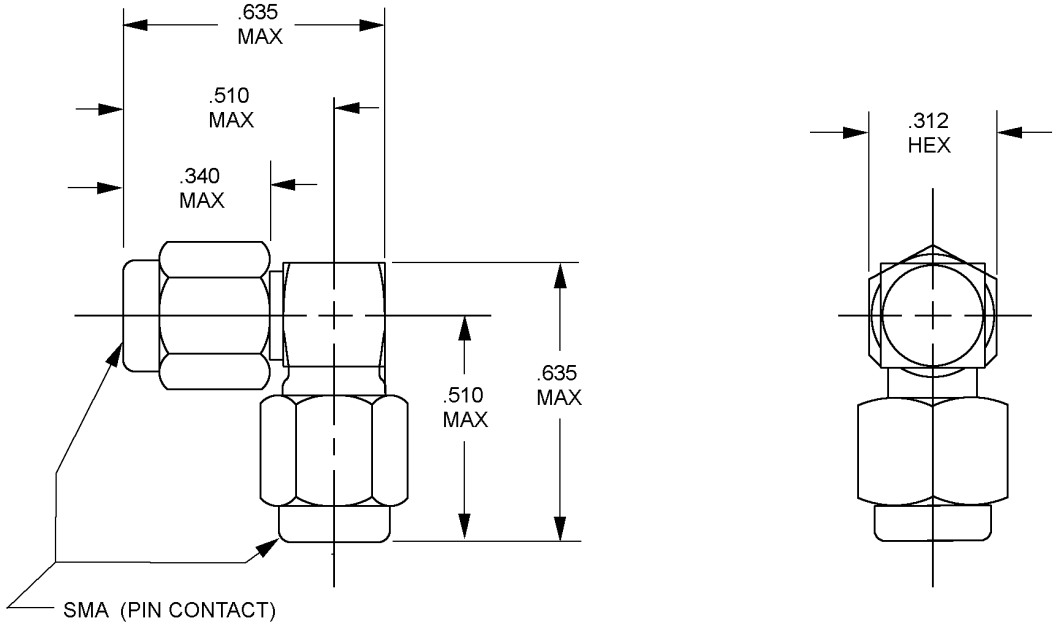

Inches	mm
.312	7.92
.340	8.64
.510	12.95
.635	16.13

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. All undimensioned pictorial configurations are for reference purposes only.
3. Unless otherwise specified, tolerance is ± .015 (0.38mm).
4. Interfaces shall be in accordance with MIL-STD-348.

FIGURE 1. General configuration.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Impedance: 50 ohms, nominal.

Working voltage:

Sea level: 335 V rms.

70,000 feet: 85 V rms.

Frequency range: 0 to 18 GHz.

Temperature range: -65° to +165°C.

REQUIREMENTS:

Performance (for each test of a threaded coupling connector where the test is performed on mated pairs, the pairs shall be torqued 7 to 10 inch-pounds (.791 to 1.13 nm)).

Dimensions and configuration: See figure 1 and MIL-STD-348.

Center contact retention:

Axial force: 6 pounds, minimum.

Torque: 4 inch-ounces, minimum.

Force to engage and disengage:

Longitudinal force: Not applicable.

Torque: 2 inch-pounds, maximum.

Coupling proof torque: 15 inch-pounds, minimum.

Mating characteristics: In accordance with MIL-STD-348.

Permeability: Less than 2.0.

Seal (hermetic, pressurized, and weatherproof): Not applicable.

Insulation resistance: 5,000 megohms, minimum.

Voltage standing wave ratio: 1.05 + .010 F , (F in GHz) maximum, at .5 to 18 GHz.

RF leakage (total): -60 dB, minimum, at 2 to 3 GHz.

RF insertion loss: (.05 $\sqrt{F(GHz)}$ dB, maximum, tested at 6 GHz) .

Durability: 500 cycles, minimum, at 12 cycles per minute, maximum.

Dielectric withstanding voltage: MIL-STD-202-301.

Test voltage: 1,000 V rms, minimum, at sea level.

Contact resistance (in milliohms, maximum):

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

Contact	Initial	After environmental
Center	4.0	6.0
Outer	2.0	N/A

Vibration, high frequency: MIL-STD-202-204, test condition D.

Shock (specified pulse): MIL-STD-202-213, test condition I.

Thermal shock: MIL-STD-202-107, test condition B.

Moisture resistance: MIL-STD-202-106.

Insulation resistance: 200 megohms, minimum, within 5 minutes after removal from humidity.

Corona level: 250 V, minimum.

Altitude: 70,000 feet.

RF high potential withstanding voltage:

RF voltage: 670 V rms.

Frequency: 5 MHz.

Salt spray (corrosion): MIL-STD-202-101, test condition B.

Coupling mechanism retention force: 60 pounds, minimum.

Group qualification: See table I.

MARKING: As specified in MIL-PRF-55339.

Part or Identifying Number (PIN): M55339/53-30001
M55339/53-40001

TABLE I. Group qualification.

Group	Submission and qualification of any of the following connectors	Qualifies the following connectors
1	M55339/02-30001 M55339/53-30001	M55339/02-30001 M55339/53-30001
2	M55339/02-40001 M55339/53-40001	M55339/02-40001 M55339-53-40001

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

Referenced documents: In addition to MIL-PRF-55339, this document references the following:

MIL-STD-202-101
MIL-STD-202-106
MIL-STD-202-107
MIL-STD-202-204
MIL-STD-202-213
MIL-STD-202-301
MIL-STD-348

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-2017-051)

Review activities:
Army - AR, AT, MI
Navy - AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.