MILITARY SPECIFICATION

TRANSMITTERS, PRESSURE, HELICOPTER, VOLTAGE RATIO TYPE, GENERAL SPECIFICATION FOR

This amendment forms a part of MIL-T-58097(AV) dated 10 January 1975 and NOTICE 2, dated 19 January 1990, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 6

3.9.2.4 Open circuit tap voltage Delete all limits in table and substitute the following:

Percent Deflection	Tap Voltage Ratio	Phase Angle
0	0.5890 ± 0.0053	0 ± 2.5
50	0.4960 ± 0.0433	0 ± 2.5
100	0.4055 ± 0.0069	0 ± 2.5

3.9.2.5 Impedance. Delete all limits in table and substitute the following

Percent Deflection	Resistance (Ohms)	Inductance (millihenrys)
0	20.614 ± 3.42	27.454 ± 3.594
50	22.225 ± 3.50	28.613 ± 3.562
100	20.846 ± 2.86	27.301 ± 2.964

AMSC N/A FSC 6620
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:01Z
Check the source to verify that this is the current version before use.

Replace FIGURE 1. TRANSMITTER CASE, with the following figure.

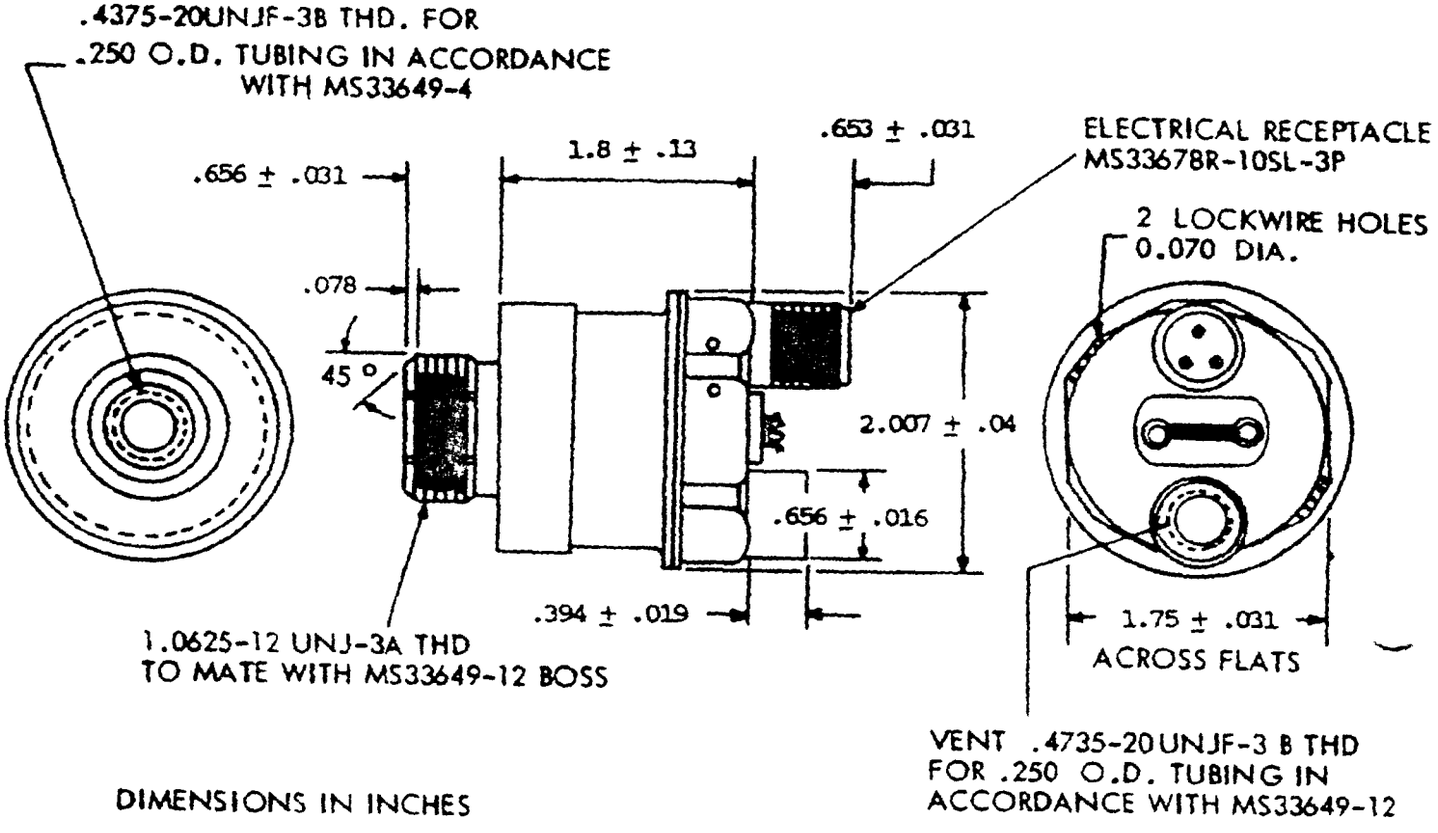


FIGURE 1. TRANSMITTER CASE

Prep Activity: AV

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:01Z
Check the source to verify that this is the current version before use.