MIL-R-12934 17C
14 March 1974
SUPERSEDING
MIL-R-12934 17B
28 January 1971

MILITARY SPECIFICATION

RESISTORS, VARIABLE, WIRE-WOUND, PRECISION, STYLE RR3400

This specification is approved for use by all Departments and Agencies of the Department of Defense.


1. SCOPE

1.1 This specification covers the detail requirements for style RR3400 variable, wire-wound, precision resistors.

1.2 Classification.

1.2.1 Type designation. The type designation shall be in the following form:

Single-section (cup) resistors

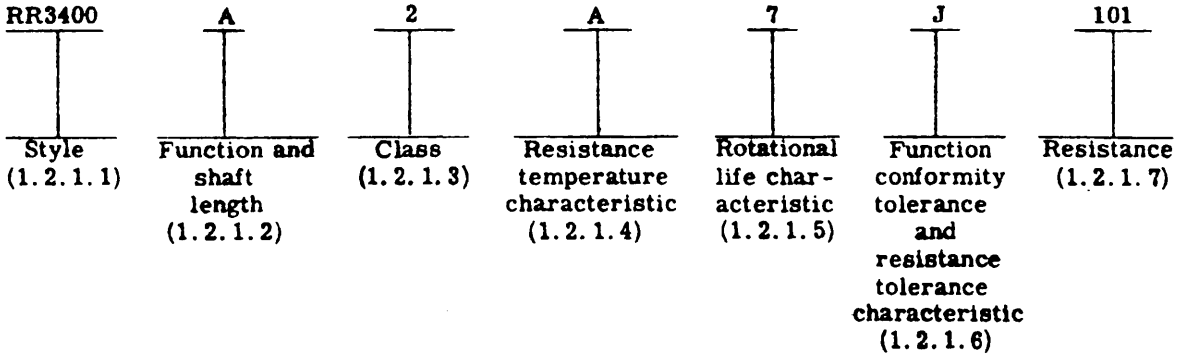

1.2.1.1 Style RR3400. Style RR3400 is applicable to this specification.

1.2.1.2 Function and shaft length. The function and shaft length applicable to this specification shall be identified by a single symbol in accordance with table I.

TABLE I. Function and shaft length.

Symbol	Shaft length Tolerance ±1/32 (.79)	Function
A - - - - - - -	3/4 (19.05)	Linear
B - - - - - - -	7/8 (22.23)	Linear
C - - - - - - -	1 (25.40)	Linear
D - - - - - - -	1-1/8 (28.58)	Linear
E - - - - - - -	1-1/4 (31.75)	Linear
F - - - - - - -	1-3/8 (34.93)	Linear

1.2.1.3 Class. The class applicable to this specification shall be symbols 2 and 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:46Z
Check the source to verify that this is the current version before use.

1.2.1.4 Resistance temperature characteristics. The resistance temperature characteristics applicable to this specification are symbols A to H inclusive.

1.2.1.5 Rotational life characteristics. The rotational life characteristics applicable to this specification are symbols 7, 8, and 9. This potentiometer is capable of operation up to 100 RPM.

1.2.1.6 Function conformity tolerance and resistance tolerance characteristics. The function conformity tolerance and resistance tolerance characteristics applicable to this specification are symbols A to X, inclusive.

1.2.1.7 Resistance. The nominal total resistance values applicable to this specification shall be in accordance with table II.

TABLE II. Nominal total resistance and nominal resolution characteristic.

Nominal total resistance value	Nominal resolution
(Ohms)	(Percent)
100	.22
200	.19
500	.15
1,000	.12
2,000	.10
5,000	.08
10,000	.06
20,000	.05
50,000	.04
60,000	.04

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-R-12934 - Resistors, Variable, Wire-wound, Precision.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS


3.1 Requirements. Requirements shall be in accordance with MIL-R-12934, and as specified herein.

3.2 Design and construction. The resistors shall be of the design, construction, and physical dimensions specified on figure 1.

3.3 Minimum resistance. Minimum total resistance value shall be 100 ohms.

3.4 Maximum resistance. Maximum total resistance value shall be 60,000 ohms.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:46Z
Check the source to verify that this is the current version before use.

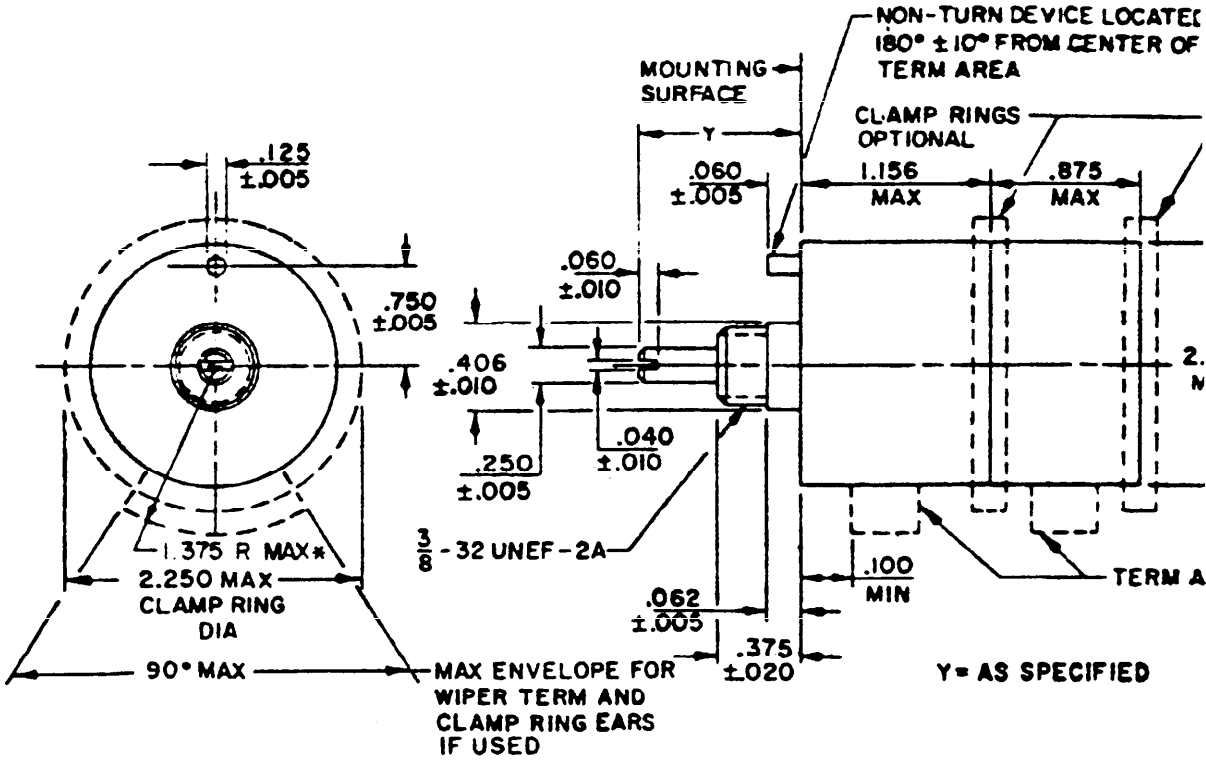

INCHES	MM	INCHES	MM
.005	.13	.375	9.53
.010	.25	.406	10.31
.020	.51	.750	19.05
.040	1.02	.875	22.23
.060	1.52	1.156	29.36
.062	1.57	1.375	34.93
.100	2.54	2.031	51.59
.125	3.18	2.250	57.13
.250	6.35		

Style	Turns	Maximum continuous working voltage (volts)	Power rating (watts) 1/	Maximum starting and running torque (ounce-inch)			
				Single-turn single cup		Per each additional single-turn cup	
				starting	running	starting	running
RR3400	Single	250	4.0	1.0	1.0	.8	.8

1/ When single turn units are ganged, the first cup will be full rated wattage, the remaining cups will be 75% of rated wattage.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Style RR3400.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:46Z
Check the source to verify that this is the current version before use.

3.5 Mechanical travel. Mechanical travel shall be 360°.

3.6 Actual electrical travel. The actual electrical travel shall be 350° ±2°.

3.7 Ganged cups. There shall be no more than 3 cups ganged.

3.8 Phasing. For independent linearity the phasing between the cups shall be within ±1°. This shall be measured, with respect to the first cup, starting from the counterclockwise end point.

3.9 Function. The type of function applicable to this specification is linear function (independent linearity).

3.10 Weight. The maximum weight shall be .25 pound and each additional cup shall be .13 pound.

3.11 Hardware. The mounting nut shall be 3/32-inch thick and shall measure 1/2-inch across the hexagonal flats. Thread size shall be 3/8-32NEF-2A. Internal-tooth lockwasher of suitable size shall be supplied.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with MIL-R-12934 and as specified herein.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-R-12934.

6. NOTES

6.1 The notes specified in MIL-R-12934 are applicable to this specification.

6.2 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MI, MU, EL
Navy - EC, AS, OS
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - ME, AT, AV
Navy -
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5905-0840-4)

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:46Z
Check the source to verify that this is the current version before use.

To detach it for cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-R-12934/17C RESISTORS, VARIABLE, WIRE-WOUND, PRECISION STYLE RR3400

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:46Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- RD-ED
Fort Monmouth, New Jersey 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:46Z
Check the source to verify that this is the current version before use.