[METRIC]
A-A-59688/2B
28 October 2004
SUPERSEDING
A-A-59688/2A
March 18, 2002

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

FUSE, CARTRIDGE, INSTRUMENT TYPE, 5 MM X 20 MM, QUICK-ACTING, LOW-BREAKING CAPACITY

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring the fuses described herein shall consist of this document and the issue in effect of CID A-A-59688.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system, which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

AA59688	/02	-	001	A
CID number	Applicable CID sheet (two digits)		Dash number (see table I)	Configuration (see figure 1)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Fuses supplied to this CID shall be as specified herein, and shall meet the requirements of IEC 60127-2, part 2 (see figure 1).

Case or body. The case or body shall be glass.

Ferrules. The materials for the ferrules shall be nickel or silver plated brass.

Mounting. Configuration A (ferrule type) is intended to be used with an applicable fuseholder or fuse clip. Configuration B (axial leads) is intended to be directly soldered onto a printed wiring board.

Current rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 250 V ac maximum.


Voltage drop. Voltage drop shall be in accordance with table I.

Pre-arcing time/current characteristic. Pre-arcing time/current characteristic shall be as specified in table II.

Breaking capacity. The breaking capacity shall be 35 amperes maximum or 10 I_n, whichever is greater.

Endurance. Endurance shall be 100 cycles at 1.2 times the rated current followed by 1 hour at 1.5 times the rated current.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

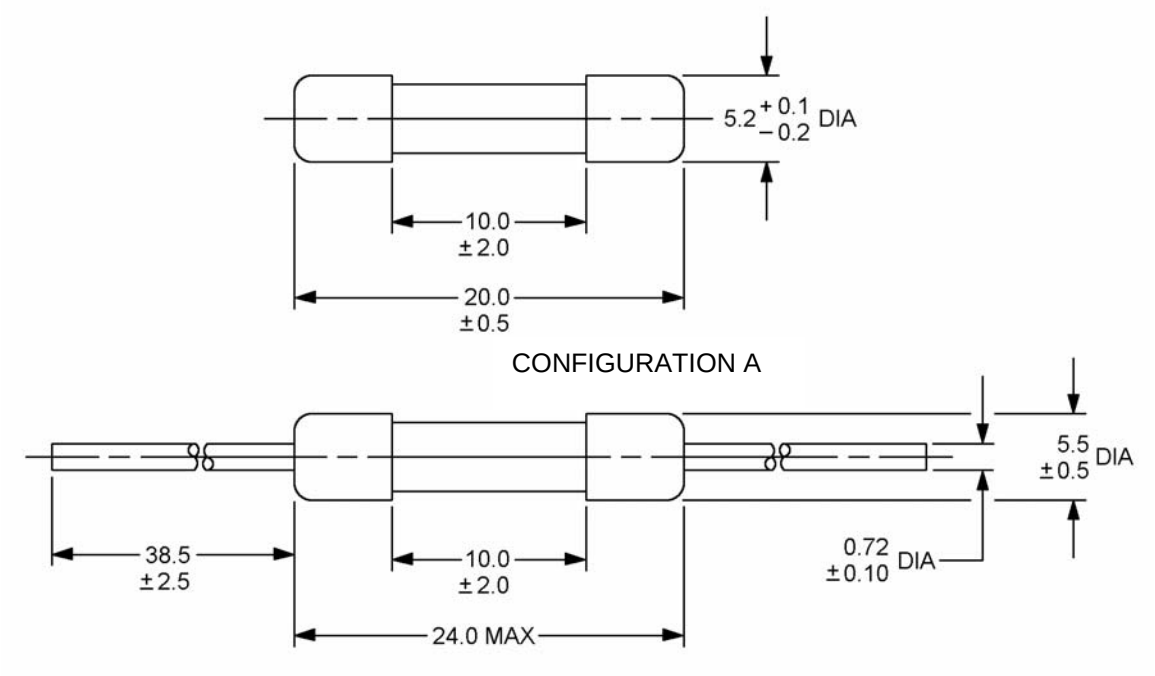

mm	Inches	mm	Inches
0.10	.004	5.20	.205
0.20	.008	5.50	.217
0.50	.020	10.0	.394
0.72	.028	20.0	.787
1.00	.039	24.0	.945
2.00	.079	38.5	1.516
2.50	.098		

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (.005 inch), unless otherwise specified.

FIGURE 1. Interface and physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

Dash number AA59688/02-	Configuration	Current rating (amperes)	Maximum voltage drop (mV)	Power dissipation (W) max.
001A	A	32 mA	10,000	1.6
001B	B			
002A	A	40 mA	8,000	
002B	B			
003A	A	50 mA	7,000	
003B	B			
004A	A	63 mA	5,000	
004B	B			
005A	A	80 mA	4,000	
005B	B			
006A	A	100 mA	3,500	
006B	B			
007A	A	125 mA	2,000	
007B	B			
008A	A	160 mA	2,000	
008B	B			
009A	A	200 mA	1,700	
009B	B			
010A	A	250 mA	1,400	
010B	B			
011A	A	315 mA	1,300	
011B	B			
012A	A	400 mA	1,200	
012B	B			
013A	A	500 mA	1,000	
013B	B			
014A	A	630 mA	650	
014B	B			
015A	A	800 mA	240	
015B	B			
016A	A	1 A	200	
016B	B			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics - Continued.

Dash number AA59688/02-	Configuration	Current rating (amperes)	Maximum voltage drop (mV)	Power dissipation (W) max.
017A	A	1.25 A	200	1.6
017B	B			
018A	A	1.6 A	190	
018B	B			
019A	A	2 A	170	
019B	B			
020A	A	2.5 A	170	
020B	B			
021A	A	3.15 A	150	2.5
021B	B			
022A	A	4 A	130	
022B	B			
023A	A	5 A	150	
023B	B			
024A	A	6.3 A	130	
024B	B			

TABLE II. Pre-arcing time/current characteristic (+25°C ±10°C).

Rated current	Percent of current rating					
	210 percent	275 percent		400 percent		1,000 percent
	Max.	Min.	Max.	Min.	Max.	Max.
23 to 100 mA inclusive	30 min.	10 ms	500 ms	3 ms	100 ms	20 ms
Above 100 mA to 6.3 A	30 min.	50 ms	2 s	10 ms	300 ms	20 ms

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See classification information for PIN format example.

Source of documents.

Other Publications

AMERICAN NATIONAL STANDARDS INSTITUTE/INTERNATIONAL ELECTROTECHNICAL COMMISSION

ANSI/IEC 60127-2 - Miniature Fuses, Part 2: Cartridge Fuse-Links.

(Applications for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
0JR59	Wickmann USA, Incorporated 4100 Shirley Drive Atlanta, GA 30336-1906 Phone number (404) 699-7820 Facsimile number (404) 699-9176 E-mail: service@wickmannusa.com Uniform Resource Locator (URL): www.wickmannusa.com
61935	Schurter, Incorporated 447 Aviation Boulevard Santa Rosa, CA 95403-1069 Phone number (707) 636-3000 Facsimile number (707) 636-3033 E-mail: info@schurterinc.com URL: www.schurterinc.com
71400	Cooper Bussmann, Incorporated P. O. Box 14460 St. Louis, MO 63178-4460 Phone number (636) 394-2877 Facsimile number (800) 544-2570 E-mail: fusebox@buss.com URL: www.bussmann.com
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3049 Phone number (847) 824-1188 Facsimile number (847) 391-0898 E-mail: electronics@littelfuse.com URL: www.littelfuse.com
92912	Bel Fuse Incorporated 206 Van Vorst Street Jersey City, NJ 07302-4421 Phone number (201) 432-0463 Facsimile number (201) 432-9542 E-mail: belfuse@belfuse.com URL: www.belfuse.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID part numbers supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE III. P/N supersession data.

Dash number (see table I) AA59688/02-	MFR's P/N 1/				
	MFR's CAGE 0JR59	MFR's CAGE 61935	MFR's CAGE 71400	MFR's CAGE 75915	MFR's CAGE 92912
001A	19193 32mA	0034.1527	GDB-32mA	217.032	N/A
001B	19193 32mA pigtails	0034.1527.PT	GDB-V-32mA	217.032XE	N/A
002A	19193 40mA	0034.1528	GDB-40mA	217.040	N/A
002B	19193 40mA pigtails	0034.1528.PT	GDB-V-40mA	217.040XE	N/A
003A	19193 50mA	0034.1529	GDB-50mA	217.050	N/A
003B	19193 50mA pigtails	0034.1529.PT	GDB-V-50mA	217.050XE	N/A
004A	19193 63mA	0034.1530	GDB-63mA	217.063	N/A
004B	19193 63mA pigtails	0034.1530.PT	GDB-V-63mA	217.063XE	N/A
005A	19193 80mA	0034.1531	GDB-80mA	217.080	5SF80
005B	19193 80mA pigtails	0034.1531.PT	GDB-V-80mA	217.080XE	5SFP80
006A	19193 100mA	0034.1506	GDB-100mA	217.100	5SF100
006B	19193 100mA pigtails	0034.1506.PT	GDB-V-100mA	217.100XE	5SFP100
007A	19193 125mA	0034.1507	GDB-125mA	217.125	5SF125
007B	19193 125mA pigtails	0034.1507.PT	GDB-V-125mA	217.125XE	5SFP125
008A	19193 160mA	0034.1508	GDB-160mA	217.160	5SF160
008B	19193 160mA pigtails	0034.1508.PT	GDB-V-160mA	217.160XE	5SFP160
009A	19193 200mA	0034.1509	GDB-200mA	217.200	5SF200
009B	19193 200mA pigtails	0034.1509.PT	GDB-V-200mA	217.200XE	5SFP200
010A	19193 250mA	0034.1510	GDB-250mA	217.250	5SF250
010B	19193 250mA pigtails	0034.1510.PT	GDB-V-250mA	217.250XE	5SFP250
011A	19193 315mA	0034.1511	GDB-315mA	217.315	5SF315
011B	19193 315mA pigtails	0034.1511.PT	GDB-V-315mA	217.315XE	5SFP315

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

TABLE III. P/N supersession data - continued.

Dash number (see table I) AA59688/02-	MFR's P/N 1/				
	MFR's CAGE 0JR59	MFR's CAGE 61935	MFR's CAGE 71400	MFR's CAGE 75915	MFR's CAGE 92912
012A	19193 400mA	0034.1512	GDB-400mA	217.400	5SF400
012B	19193 400mA pigtails	0034.1512.PT	GDB-V-400mA	217.400XE	5SFP400
013A	19193 500mA	0034.1513	GDB-500mA	217.500	5SF500
013B	19193 500mA pigtails	0034.1513.PT	GDB-V-500mA	217.500XE	5SFP500
014A	19193 630mA	0034.1514	GDB-630mA	217.630	5SF630
014B	19193 630mA pigtails	0034.1514.PT	GDB-V-630mA	217.630XE	5SFP630
015A	19193 800mA	0034.1515	GDB-800mA	217.800	5SF800
015B	19193 800mA pigtails	0034.1515.PT	GDB-V-800mA	217.800XE	5SFP800
016A	19193 1A	0034.1516	GDB-1A	217001	5SF1
016B	19193 1A pigtails	0034.1516.PT	GDB-V-1A	217001XE	5SFP1
017A	19193 1.25A	0034.1517	GDB-1.25A	2171.25	5SF1.25
017B	19193 1.25A pigtails	0034.1517.PT	GDB-V-1.25A	2171.25XE	5SFP1.25
018A	19193 1.6A	0034.1518	GDB-1.6A	21701.6	5SF1.6
018B	19193 1.6A pigtails	0034.1518.PT	GDB-V-1.6A	21701.6XE	5SFP1.6
019A	19193 2A	0034.1519	GDB-2A	217002	5SF2
019B	19193 2A pigtails	0034.1519.PT	GDB-V-2A	217002XE	5SFP2
020A	19193 2.5A	0034.1520	GDB-2.5A	21702.5	5SF2.5
020B	19193 2.5A pigtails	0034.1520.PT	GDB-V-2.5A	21702.5XE	5SFP2.5
021A	19193 3.15A	0034.1521	GDB-3.15A	2173.15	5SF3.15
021B	19193 3.15A pigtails	0034.1521.PT	GDB-V-3.15A	2173.15XE	5SFP3.15
022A	19193 4A	0034.1522	GDB-4A	217004	5SF4
022B	19193 4A pigtails	0034.1522.PT	GDB-V-4A	217004XE	5SFP4
023A	19193 5A	0034.1523	GDB-5A	217005	5SF5
023B	19193 5A pigtails	0034.1523.PT	GDB-V-5A	217005XE	5SFP5
024A	19193 6.3A	0034.1524	GDB-6.3A	21706.3	5SF6.3
024B	19193 6.3A pigtails	0034.1524.PT	GDB-V-6.3A	21706.3XE	5SFP6.3

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements see the marking paragraph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

CID number supersession data. This CID supersedes Defense Supply Center, Columbus (DSCC) drawing 90031 and its dash numbers as shown.

TABLE IV. CID number supersession data.

CID dash number (see table I) AA59688/02-	Superseded DSCC drawing number 90031-	CID dash number (see table I) AA59688/02-	Superseded DSCC drawing number 90031-
001A	001A	013A	013A
001B	001B	013B	013B
002A	002A	014A	014A
002B	002B	014B	014B
003A	003A	015A	015A
003B	003B	015B	015B
004A	004A	016A	016A
004B	004B	016B	016B
005A	005A	017A	017A
005B	005B	017B	017B
006A	006A	018A	018A
006B	006B	018B	018B
007A	007A	019A	019A
007B	007B	019B	019B
008A	008A	020A	020A
008B	008B	020B	020B
009A	009A	021A	021A
009B	009B	021B	021B
010A	010A	022A	022A
010B	010B	022B	022B
011A	011A	023A	023A
011B	011B	023B	023B
012A	012A	024A	024A
012B	012B	024B	024B

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-0844

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.