[METRIC]
A-A-59688/3B
28 October 2004
SUPERSEDING
A-A-59688/3A
March 18, 2002

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

FUSE, CARTRIDGE, INSTRUMENT TYPE, 5 MM X 20 MM, TIME-DELAY, LOW-BREAKING CAPACITY

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring the fuses described herein shall consist of this document and the issue in effect of CID A-A-59688.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system, which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

AA59688	/03	-	001	A
CID number	Applicable CID sheet (two digits)		Dash number (see table I)	Configuration (see figure 1)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Fuses supplied to this CID shall be as specified herein, and shall meet the requirements of IEC 60127-2, part 2 (see figure 1).

Case or body. The case or body shall be glass.

Ferrules. The materials for the ferrules shall be nickel or silver plated brass.

Mounting. Configuration A (ferrule type) is intended to be used with an applicable fuseholder or fuse clip. Configuration B (axial leads) is intended to be directly soldered onto a printed wiring board.

Current rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 250 V ac maximum.


Voltage drop. Voltage drop shall be in accordance with table I.

Pre-arcing time/current characteristic. Pre-arcing time/current characteristic shall be as specified in table II.


Breaking capacity. The breaking capacity shall be 35 amperes maximum or 10 I_n, whichever is greater.

Endurance. Endurance shall be 100 cycles at 1.2 times the rated current followed by 1 hour at 1.5 times the rated current.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

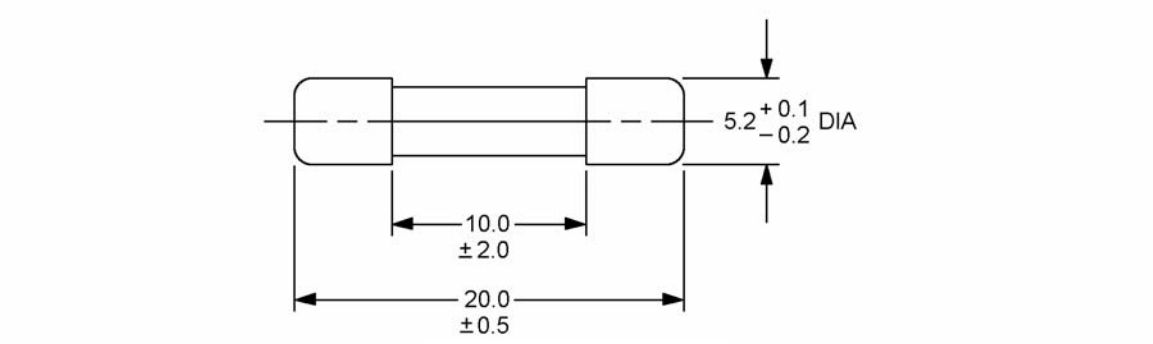

CONFIGURATION A

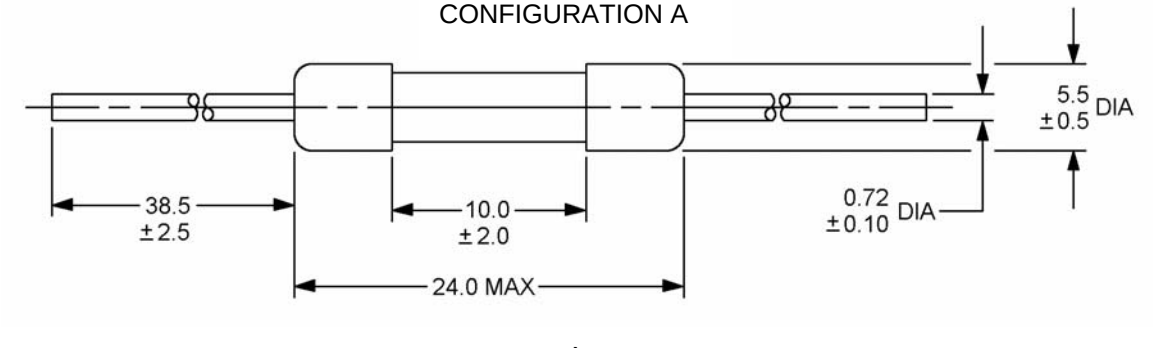

CONFIGURATION B

mm	Inches	mm	Inches
0.10	.004	5.20	.205
0.20	.008	5.50	.218
0.50	.020	10.0	.394
0.72	.028	20.0	.787
1.00	.039	24.0	.945
2.00	.079	38.5	1.516
2.50	.098		

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (.005 inch), unless otherwise specified.

FIGURE 1. Interface and physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

Dash number AA59688/03-	Configuration	Current rating (amperes)	Maximum voltage drop (mV)	Power dissipation (W) max.
001A	A	32 mA	5,000	1.6
001B	B			
002A	A	40 mA	4,000	
002B	B			
003A	A	50 mA	3,500	
003B	B			
004A	A	63 mA	3,000	
004B	B			
005A	A	80 mA	3,000	
005B	B			
006A	A	100 mA	2,500	
006B	B			
007A	A	125 mA	2,000	
007B	B			
008A	A	160 mA	1,900	
008B	B			
009A	A	200 mA	1,500	
009B	B			
010A	A	250 mA	1,300	
010B	B			
011A	A	315 mA	1,100	
011B	B			
012A	A	400 mA	1,000	
012B	B			
013A	A	500 mA	900	
013B	B			
014A	A	630 mA	300	
014B	B			
015A	A	800 mA	250	
015B	B			
016A	A	1 A	150	
016B	B			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics - Continued.

Dash number AA59688/03-	Configuration	Current rating (amperes)	Maximum voltage drop (mV)	Power dissipation (W) max.
017A	A	1.25 A	150	1.6
017B	B			
018A	A	1.6 A	150	
018B	B			
019A	A	2 A	150	
019B	B			
020A	A	2.5 A	120	
020B	B			
021A	A	3.15 A	100	
021B	B			
022A	A	4 A	100	
022B	B			
023A	A	5 A	100	
023B	B			
024A	A	6.3 A	100	
024B	B			

TABLE II. Pre-arcing time/current characteristic (+25°C ±10°C).

Rated current	Percent of current rating						
	210	275		400		1,000	
	Max.	Min.	Max.	Min.	Max.	Min.	Max.
32 to 100 mA inclusive	2 min.	200 ms	10 s	40 ms	3 s	10 ms	300 ms
Above 100 mA to 6.3 A	2 min.	600 ms	10 s	150 ms	3 s	20 ms	300 ms

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See classification information for PIN format example.

Source of documents.

Other Publications

AMERICAN NATIONAL STANDARDS INSTITUTE/INTERNATIONAL ELECTROTECHNICAL COMMISSION

ANSI/IEC 60127-2 - Miniature Fuses, Part 2: Cartridge Fuse-Links.

(Applications for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
0JR59	Wickmann USA, Incorporated 4100 Shirley Drive Atlanta, GA 30336-1906 Phone number (404) 699-7820 Facsimile number (404) 699-9176 E-mail: service@wickmannusa.com Uniform Resource Locator (URL): www.wickmannusa.com
61935	Schurter, Incorporated 447 Aviation Boulevard Santa Rosa, CA 95403-1069 Phone number (707) 636-3000 Facsimile number (707) 636-3033 E-mail: info@schurterinc.com URL: www.schurterinc.com
71400	Cooper Bussmann, Incorporated P. O. Box 14460 St. Louis, MO 63178-4460 Phone number (636) 394-2877 Facsimile number (800) 544-2570 E-mail: fusebox@buss.com URL: www.bussmann.com
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3049 Phone number (847) 824-1188 Facsimile number (847) 391-0898 E-mail: electronics@littelfuse.com URL: www.littelfuse.com
92912	Bel Fuse Incorporated 206 Van Vorst Street Jersey City, NJ 07302-4421 Phone number (201) 432-0463 Facsimile number (201) 432-9542 E-mail: belfuse@belfuse.com URL: www.belfuse.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID part numbers supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE III. P/N supersession data.

Dash number (see table I) AA59688/03-	MFR's P/N 1/				
	MFR's CAGE 0JR59	MFR's CAGE 61953	MFR's CAGE 71400	MFR's CAGE 75915	MFR's CAGE 92912
001A	19195 32mA	0034.3102	GDC-32mA	218.032	N/A
001B	19195 32mA pigtails	0034.3102.PT	GDC-V-32mA	218.032XE	N/A
002A	19195 40mA	0034.3103	GDC-40mA	218.040	N/A
002B	19195 40mA pigtails	0034.3103.PT	GDC-V-40mA	218.040XE	N/A
003A	19195 50mA	0034.3104	GDC-50mA	218.050	N/A
003B	19195 50mA pigtails	0034.3104.PT	GDC-V-50mA	218.050XE	N/A
004A	19195 63mA	0034.3105	GDC-63mA	218.063	5ST63
004B	19195 63mA pigtails	0034.3105.PT	GDC-V-63mA	218.063XE	5STP63
005A	19195 80mA	0034.3106	GDC-80mA	218.080	5ST80
005B	19195 80mA pigtails	0034.3106.PT	GDC-V-80mA	218.080XE	5STP80
006A	19195 100mA	0034.3107	GDC-100mA	218.100	5ST100
006B	19195 100mA pigtails	0034.3107.PT	GDC-V-100mA	218.100XE	5STP100
007A	19195 125mA	0034.3108	GDC-125mA	218.125	5ST125
007B	19195 125mA pigtails	0034.3108.PT	GDC-V-125mA	218.125XE	5STP125
008A	19195 160mA	0034.3109	GDC-160mA	218.160	5ST160
008B	19195 160mA pigtails	0034.3109.PT	GDC-V-160mA	218.160XE	5STP160
009A	19195 200mA	0034.3110	GDC-200mA	218.200	5ST200
009B	19195 200mA pigtails	0034.3110.PT	GDC-V-200mA	218.200XE	5STP200
010A	19195 250mA	0034.3111	GDC-250mA	218.250	5ST250
010B	19195 250mA pigtails	0034.3111.PT	GDC-V-250mA	218.250XE	5STP250
011A	19195 315mA	0034.3112	GDC-315mA	218.315	5ST315
011B	19195 315mA pigtails	0034.3112.PT	GDC-V-315mA	218.315XE	5STP315

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

TABLE III. P/N supersession data - continued.

Dash number (see table I) AA59688/02-	MFR's P/N 1/				
	MFR's CAGE 0JR59	MFR's CAGE 61953	MFR's CAGE 71400	MFR's CAGE 75915	MFR's CAGE 92912
012A	19195 400mA	0034.3113	GDC-400mA	218.400	5ST400
012B	19195 400mA pigtails	0034.3113.PT	GDC-V-400mA	228.400XE	5STP400
013A	19195 500mA	0034.3114	GDC-500mA	218.500	5ST500
013B	19195 500mA pigtails	0034.3114.PT	GDC-V-500mA	228.500XE	5STP500
014A	19195 630mA	0034.3115	GDC-630mA	218.630	5ST630
014B	19195 630mA pigtails	0034.3115.PT	GDC-V-630mA	228.630XE	5STP630
015A	19195 800mA	0034.3116	GDC-800mA	218.800	5ST800
015B	19195 800mA pigtails	0034.3116.PT	GDC-V-800mA	228.800XE	5STP800
016A	19195 1A	0034.3117	GDC-1A	218001	5ST1
016B	19195 1A pigtails	0034.3117.PT	GDC-V-1A	228001XE	5STP1
017A	19195 1.25A	0034.3118	GDC-1.25A	2181.25	5ST1.25
017B	19195 1.25A pigtails	0034.3118.PT	GDC-V-1.25A	2281.25XE	5STP1.25
018A	19195 1.6A	0034.3119	GDC-1.6A	21801.6	5ST1.6
018B	19195 1.6A pigtails	0034.3119.PT	GDC-V-1.6A	22801.6XE	5STP1.6
019A	19195 2A	0034.3120	GDC-2A	218002	5ST2
019B	19195 2A pigtails	0034.3120.PT	GDC-V-2A	228002XE	5STP2
020A	19195 2.5A	0034.3121	GDC-2.5A	21802.5	5ST2.5
020B	19195 2.5A pigtails	0034.3121.PT	GDC-V-2.5A	22802.5XE	5STP2.5
021A	19195 3.15A	0034.3122	GDC-3.15A	2183.15	5ST3.15
021B	19195 3.15A pigtails	0034.3122.PT	GDC-V-3.15A	2283.15XE	5STP3.15
022A	19195 4A	0034.3123	GDC-4A	218004	5ST4
022B	19195 4A pigtails	0034.3123.PT	GDC-V-4A	218004XE	5STP4
023A	19195 5A	0034.3124	GDC-5A	218005	5ST5
023B	19195 5A pigtails	0034.3124.PT	GDC-V-5A	228005XE	5STP5
024A	19195 6.3A	0034.3125	GDC-6.3A	21806.3	5ST6.3
024B	19195 6.3A pigtails	0034.3125.PT	GDC-V-6.3A	21806.3XE	5STP6.3

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown-. For actual part marking requirements see the marking paragraph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

CID number supersession data. This CID supersedes Defense Supply Center, Columbus (DSCC) drawing 90032 and its dash numbers as shown.

TABLE IV. CID number supersession data.

Dash number (see table I) AA59688/03-	Superseded DSCC drawing number 90032-	Dash number (see table I) AA59688/03-	Superseded DSCC drawing number 90032-
001A	001A	013A	013A
001B	001B	013B	013B
002A	002A	014A	014A
002B	002B	014B	014B
003A	003A	015A	015A
003B	003B	015B	015B
004A	004A	016A	016A
004B	004B	016B	016B
005A	005A	017A	017A
005B	005B	017B	017B
006A	006A	018A	018A
006B	006B	018B	018B
007A	007A	019A	019A
007B	007B	019B	019B
008A	008A	020A	020A
008B	008B	020B	020B
009A	009A	021A	021A
009B	009B	021B	021B
010A	010A	022A	022A
010B	010B	022B	022B
011A	011A	023A	023A
011B	011B	023B	023B
012A	012A	024A	024A
012B	012B	024B	024B

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-0845

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.