[INCH-POUND]
A-A-59689/1
June 8, 2001

COMMERCIAL ITEM DESCRIPTION

FUSE, FINGER-SAFE, DUAL-ELEMENT, TIME-DELAY, INDICATING, 1 AMPERES (A) TO 30 A

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring the fuses described herein shall consist of this document and the issue in effect of CID A-A-59689.

CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

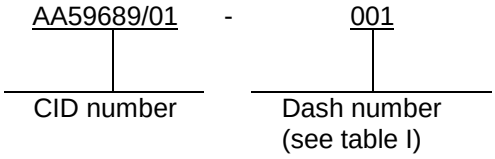

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Fuses supplied to this CID shall be as specified herein, and shall meet the IP-20 finger-safe requirements of IEC 60529 and the electrical performance requirements of UL248-8 for class J special purpose fuses (see figure 1).

Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 600 V ac and 300 V dc maximum at 20,000 ampere interrupt rating.

Interrupting rating. The interrupting rating shall be 300,000 amperes (A) rms symmetrical.

TABLE I. Characteristics.

CID dash number AA59689/01-	Ampere rating	CID dash number AA59689/01-	Ampere rating
001	1	006	17 1/2
002	3	007	20
003	6	008	25
004	10	009	30
005	15		

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

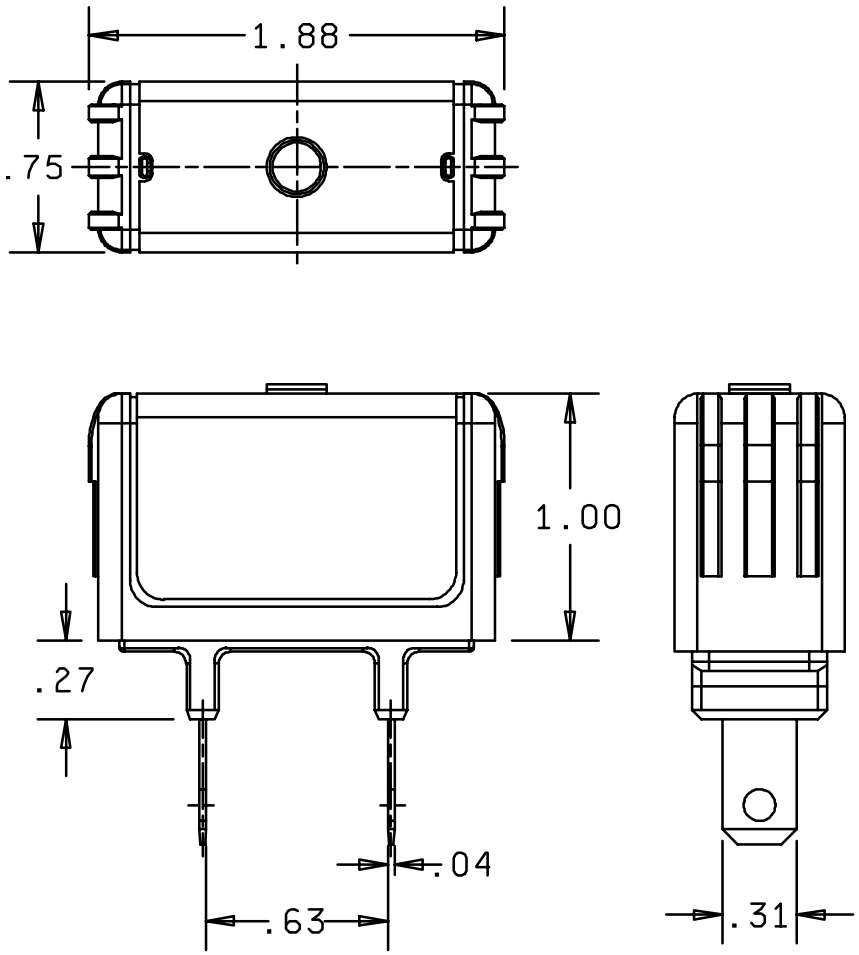

Inches	mm
.04	1.02
.27	6.86
.31	7.94
.63	15.88
.75	19.05
1.00	25.40
1.88	47.75

NOTES:

1. Dimensions are in inches.
2. Tolerance is ±.005 inch (0.13 mm), unless otherwise specified.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Operating time characteristics. Fuses shall posses a 10-second minimum operating time at 500 percent of rated current.

Open fuse indication. Fuses shall provide permanent open fuse indication.

Accommodating fuseholder. Fuses supplied to this CID may be used with fuseholders CID 59690/1.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See classification information for PIN format example.

Source of document.

Other publications.

INTERNATIONAL ELECTROTECKNICAL COMMISSION (IEC)

IEC 60529 - Degrees of Protection Provided by Enclosures (IP Code).

(Applications for copies should be addressed to the International Electrotechnical Commission, 3 Rue De Varembe', Geneva Switzerland.)

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 248-8 - Low-Voltage Fuses - Part 8: Class J Fuses.

(Applications for copies should be addressed to the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
71400	Cooper Bussmann, Incorporated P. O. Box 14460 St. Louis, MO 63178-4460 Phone number: (636) 394-2877 Facsimile number: (800) 544-2570 E-mail: fusebox@buss.com Uniform Resource Locator (URL): www.bussmann.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID part numbers supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE III. P/N supersession data.

CID dash number AA59689/01- (see table I)	MFR's CAGE	MFR's P/N 1/
001	71400	TCF 1
002	71400	TCF 3
003	71400	TCF 6
004	71400	TCF 10
005	71400	TCF 15
006	71400	TCF 17 1/2
007	71400	TCF 20
008	71400	TCF 25
009	71400	TCF 30

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements see 3.2 of A-A-59689.

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:

DLA-CC

Project 5920-0726-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.