INCH-POUND

MIL-C-48486C(AR)
23 June 1995
(see 6.4)

MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY - GCU TEST ELECTRONICS

This specification is approved for use by the U.S. Army Armament, Research, Development and Engineering Center (ARDEC) and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements and quality assurance provisions for the Circuit Card Assembly - Gunner's Control Unit (GCU) Test Electronics, 11732537 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, General Specification Governing the Manufacture and Inspection of

MIL-I-45607 - Inspection Equipment; Acquisition, Maintenance, and Disposition of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use to improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: AMSTA-AR-EDE-S, Picatinny Arsenal, New Jersey 07806-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1240

DISTRIBUTION STATEMENT A. **Approved for public release; distribution is unlimited.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-100	- Engineering Drawing Practices
MIL-STD-454	- Standard General Requirements for Electronic Equipment
MIL-STD-810	- Environmental Test Methods
MIL-STD-2000	- Standard Requirements for Soldered Electrical and Electronics Assemblies
MIL-STD-2073-1	- Procedures for Development and Application of Packaging Requirements

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from: DODSSP - Customer Service, Standardization Documents Order Desk, 700 Robbins Avenue, Bldg 4D, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issue shall be those in effect on date of the solicitation.

U.S. Army Armament Research Development and Engineering Center (ARDEC)

DRAWINGS

11732537	- Circuit Card Assembly - Gunner's Control Unit Test Electronics

(Copies of Government drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained (see contract provisions for additional precedence criteria).

3. REQUIREMENTS

3.1 Fabrication. The gunner's control unit electronics circuit card assembly, herein referred to as the assembly, shall be manufactured in accordance with Drawing 11732537 and drawings pertaining thereto and, when assembled, shall meet the requirements of this specification (see 4.5.1).

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the current version before use.

3.1.1 Function. The assembly shall provide the following functions:

a. Decode signals from the Gunner's Control Unit (GCU).

b. Provide 24 volt lamp indications of the function tested within the GCU.

c. Provide signals to the GCU for testing gating and comparator logic.

3.1.2 General specifications. (see 4.6.3)

3.1.2.1 Manufacture and inspection. The following provisions of MIL-F-13926 apply:

a. Dimensions and tolerances
b. Effect of protective coating on dimensions (Inorganic type coating)
c. Part identification and marking
d. Workmanship (Including applicable portions of MIL-STD-2000 and MIL-STD-454, Requirement 9)

3.1.2.2 Standards of manufacture.

3.1.2.2.1 Assembly and soldering. The requirements of MIL-STD-2000 shall apply, as a minimum.

3.1.2.2.2 Interchangeability. The assembly shall be manufactured in accordance with interchangeability requirements as specified in MIL-STD-100.

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

a.	Temperature	73° ± 18°F
b.	Relative humidity	50 percent ±30 percent
c.	Atmospheric pressure	28.5 + 2.0 −3.0 in. Hg.

3.2 First article. When specified in the contract or purchase order (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4).

3.3 Performance. Unless otherwise specified, the assembly shall meet the performance requirements specified herein under standard ambient conditions of 3.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

TABLE I. Loads, power, signals and interconnections.

Item	Condition	Characteristics	Connections
1.0	Loads		Connected between the following pins:
1.1	Lamp	24V lamp in series with 24V dc	P1-B8(-) and 24V dc(+)*
1.2	Lamp	24V lamp in series with 24V dc	P1-A11(-) and 24V dc(+)*
1.3	Lamp	24V lamp in series with 24V dc	P1-B26(-) and 24V dc(+)*
1.4	Lamp	24V lamp in series with 24V dc	P1-A26(-) and 24V dc(+)*
1.5	Lamp	24V lamp in series with 24V dc	P1-A6(-) and 24V dc(+)*
1.6	Lamp	24V lamp in series with 24V dc	P1-A9(-) and 24V dc(+)*
1.7	Lamp	24V lamp in series with 24V dc	P1-A20(-) and 24V dc(+)*
1.8	Lamp	24V lamp in series with 24V dc	P1-B20(-) and 24V dc(+)*
1.9	Lamp	24V lamp in series with 24V dc	P1-A21(-) and 24V dc(+)*
1.10	Lamp	24V lamp in series with 24V dc	P1-B21(-) and 24V dc(+)*
1.11	Lamp	24V lamp in series with 24V dc	P1-A22(-) and 24V dc(+)*
1.12	Lamp	24V lamp in series with 24V dc	P1-A19(-) and 24V dc(+)*
1.13	Lamp	24V lamp in series with 24V dc	P1-B24(-) and 24V dc(+)*
1.14	Lamp	24V lamp in series with 24V dc	P1-B22(-) and 24V dc(+)*
2.0	Power Sources		Connected between the following pins:
2.1	24V dc	Tolerance: ±2V dc Ripple: 200mV p-p max Current: 500ma min	P1-A23(-) and load lamps Items 1.1 through 1.14
2.2	15V dc	Tolerance: ±0.030V dc Ripple: 20mV p-p max Current: 500ma min	P1-A1(+) and P1-A3(-)
2.3	5.25V dc	Tolerance: ±0.15V dc Ripple: 20mV p-p max Current: 500ma min	P1-A30(+) and P1-A13(-)
2.4	-15V dc	Tolerance: ±0.030V dc Ripple: 20mV p-p max Current: 500ma min	P1-A4(-) and P1-A3(+)

* See Item 2.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

TABLE I. Loads, power, signals and interconnections. (Cont.)

Item	Condition	Characteristics	Connections
3.0	Signal Sources		Connected between the following pins:
3.1	5.25V dc	Tolerance: ±0.15V dc Ripple 20mV p-p max Current 200ma min	Applied as specified with return to pin P1-A13
3.2	-15V dc	Tolerance: ±0.030V dc Ripple 20mV p-p max Current 200ma min	Applied as specified, with return to pin
3.3	115V ac (rms)	Tolerance: ±11.5V rms 40-400 Hz	Applied as specified, with return to pin P1-A3
3.4	0 to 1.5V dc variable	Tolerance as specified Ripple 20mV p-p max Current 500ma min	Applied to P1-A27(+) with return to pin P1-A3 as specified. Measured with respect to pin P1-A3.
4.0	Interconnection	return reference	Interconnection of listed pins.
4.1			P1-A3 to P1-A13
4.2			P1-A3 to P1-A23

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the current version before use.

3.3.1 GCU APDS, HEP/WP, and FSDS ammo select logic. With the load lamps (items 1.1, 1.2, 1.3 and 1.4 of Table I), the interconnections (items 4.1 and 4.2 of Table I), and power sources (items 2.1, 2.2, 2.3 and 2.4 of Table I) applied to the assembly; and with each item's input conditions of Table II established in any item number order, the states of the corresponding load lamps shall be specified in Table II (see 4.6.1.1).

TABLE II. GCU, APDS, HEP/WP and FSDS ammo select logic.

	Input Conditions at P1 Pins 1/				Illumination Conditions at Load Lamps Table I Items 2/			
Item	A5	B6	B9	B10	1.1	1.2	1.3	1.4
1	1	1	NC	NC	X	-	-	-
2	0	1	NC	NC	-	X	-	-
3	1	NC	1	NC	-	-	X	-
4	0	NC	NC	1	-	-	-	X

1/ 1 = GND, interconnection with pin P1-A3
0 = -15.000 ± 0.030V dc signal, item 3.2 of Table I
NC = no connection, open

2/ X = illuminated
- = not illuminated

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the current version before use.

3.3.2 GCU HEAT ammo select logic. With the lamp loads (items 1.5 and 1.6 of Table I), interconnections (items 4.1 and 4.2 of Table I), and power sources (items 2.1, 2.2, 2.3 and 2.4 of Table I) applied to the assembly; and with each item's input conditions of Table III established in any item number order, the states of the corresponding load lamps shall be as specified in Table III (see 4.6.1.2).

TABLE III. GCU heat ammo select logic.

	Input Conditions at P1 Pins 1/				Illumination Conditions at Load Lamps Table I Items 2/	
Item	A5	B6	B9	B10	1.5	1.6
1	1	1	NC	NC	X	-
2	0	1	NC	NC	-	-
3	1	NC	1	NC	-	x
4	0	NC	NC	1	-	-

1/ 1 = GND, interconnection with P1-A3
0 = -15.000 ± 0.030V dc signal, item 3.2 of Table I.
NC = no connection, open

2/ X = illuminated
- = not illuminated

3.3.3 GCU mode select logic. With the lamp loads (items 1.7 through 1.14 inclusive, of Table I), the interconnections (items 4.1 and 4.2 of Table I), and power sources (items 2.1, 2.2, 2.3, and 2.4 of Table I) applied to the assembly; and with each item's input conditions of Table IV established in any item number order, the states of the corresponding load lamps shall be as specified in Table IV (see 4.6.1.3).

3.3.4 Logic gating. With the power sources (items 2.2, 2.3, and 2.4 of Table I) and the interconnection (item 4.1 of Table I) applied to the assembly; and with each item's input conditions of Table V established in any item number order, the corresponding outputs at pins P1-B4, A25, and B28 shall be as specified in Table V (see 4.6.1.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

TABLE IV. GCU mode select logic.

	Input Conditions at P1 Pins							Illumination Conditions at Load Lamps Table I Items 3/							
Item	B16 1/	A16 1/	B17 1/	A17 1/	B18 1/	A18 1/	A15 2/	1.7	1.8	1.9	1.10	1.11	1.12	1.13	1.14
1	1	1	1	1	1	1	1	-	-	-	-	-	-	X	-
2	0	0	0	0	0	0	0	X	X	X	X	X	X	-	X

1/ 1 = GND, interconnection with pin P1-A3;
0 = -15.00 ± 0.03V dc signal, item 3.2 of Table I

2/ 1 = 5.25 +0.15V dc signal, item 3.1 of Table I
0 = GND, interconnection with pin P1-A13

3/ X = illuminated
- = not illuminated

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

TABLE V. Logic gating.

	Input Conditions at P1 Pins 1/, 3/							Output conditions at P1 Pins 2/, 3/		
	Test for B4				Test for A25		Test for B28			
Item	B1	B3	B1	B23	A8	B19	B27	B4	A25	B28
1	0	0	0	0	0	0	0	0	1	1
2	0	1	0	1	0	1	1	0	0	0
3	1	0	1	0	1	0	NA	0	0	NA
4	1	0	1	1	1	1	NA	1	0	NA
5	1	1	1	0	NA	NA	NA	1	NA	NA
6	1	1	1	1	NA	NA	NA	1	NA	NA

1/ 1 = 5.25 ± 0.15V dc (item 3.1 of Table I)
0 = GND, interconnection with P1-A13
NA = not an applicable condition

2/ 1 = 5.00 +0.50/-2.60V dc
0 = 0.05V dc
NA = not an applicable condition

3/ All measurements to be made with respect to pin P1-A13.

3.3.5 Signal C resistor. The resistance between pins P1-A28 and P1-A3 shall be 4220 ± 42 ohms (see 4.6.1.5).

3.3.6 115V ac detector. With the power sources (items 2.2, 2.3, and 2.4 of Table I) and the interconnection (item 4.1 of Table I) applied to the assembly; and (see 4.6.1.6)

a. With the 115V ac signal (item 3.3 of Table I) applied to pin P1-A29, the output at pin P1-B29 shall be greater than 2.4V dc, measured with respect to pin P1-A13.

b. With pin P1-A29 interconnected with pin P1-A3, the output at pin P1-B29 shall be 0.0 ± 0.5V dc, measured with respect to pin P1-A13.

3.3.7 Reference voltages. With the power sources (items 2.2, 2.3, and 2.4 of Table I) and the interconnection (item 4.1 of Table I) applied to the assembly: (see 4.6.1.7)

a. The output at pin P1-B11 shall be -7.070 ± 0.015V dc, measured with respect to pin P1-A3.

b. The output at pin P1-B25 shall be +7.070 ± 0.015V dc, measured with respect to pin P1-A3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

3.3.8 GCU signal comparator. With the power sources (items 2.2, 2.3, and 2.4 of Table I), the interconnection (item 4.1 of Table I), and the variable signal (item 3.4 of Table I) applied to the assembly, the output voltage at pin P1-B30 with respect to pin P1-A13 shall vary as listed in accordance with the following: (see 4.6.1.8)

a. With the variable signal adjusted to 1.003 ± 0.007V dc, the output voltage shall be 5.0 ± 0.5V dc, when the signal is increased to 1.067 ± 0.008V dc.

b. With the variable signal adjusted from the value in a. to 0.947 ± 0.008V dc, the output shall change to 0.0 ± .5V dc.

c. With the variable signal increased from the value in b. to 0.964V dc, the output voltage shall change to 5.0 ± 0.5V dc (The output actually changes when the variable signal is increased from 0.936V dc to 0.964V dc).

d. With the variable signal increased from the value in c. to 1.054 to 1.082V dc, the output shall change to 0.0 ± 0.5V dc.

e. With the variable signal decreased from the value in d. the output voltage shall change to 5.0 ± 0.5V dc, when the variable signal is adjusted to 1.046 to 1.074V dc.

3.4 Environmental.

3.4.1 Temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of +40°F to 100°F and shall not be damaged when subjected to the storage conditions ranging from -65°F to 160°F (see 4.6.2.1 and 4.6.2.2).

3.4.2 Vibration. The assembly shall be capable of operating as specified herein after withstanding exposure under the conditions of 3.1.3 to a sinusoidal vibration displacement of .03 inch double amplitude, 10 - 55 Hz in accordance with Figure 1. Duration of exposure shall be not less than 80 minutes in each of three mutually perpendicular axes (see 4.6.2.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

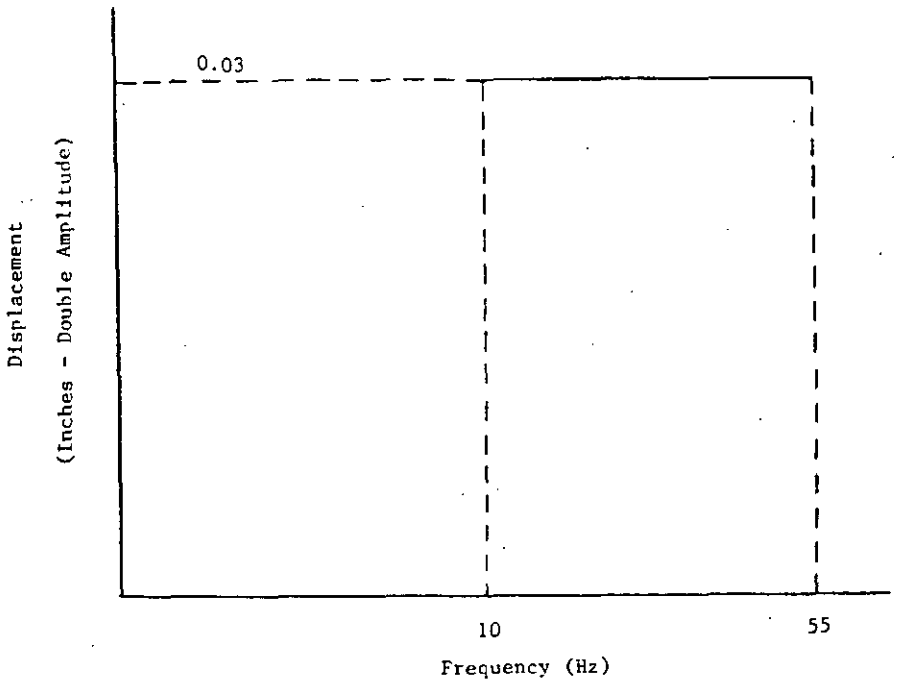


FIGURE 1. Vibration Curve.

3.4.3 Shock. The assembly shall be capable of operating as specified herein after withstanding exposure under the conditions of 3.1.3 to half sine wave shock pulses of 40 ± 4 gravity units (g's) for a duration of 18 ± 3 milliseconds (msec) in accordance with Figure 2. The assembly shall withstand three shock pulses applied in both directions along three mutually perpendicular axes (18 shocks). In addition, the assembly shall be capable of withstanding three half sine wave shock pulses of 100.0 ± 10.0 g's for a duration of 1.5 ± 0.2 msec applied in each direction along three mutually perpendicular axes (see 4.6.2.4).

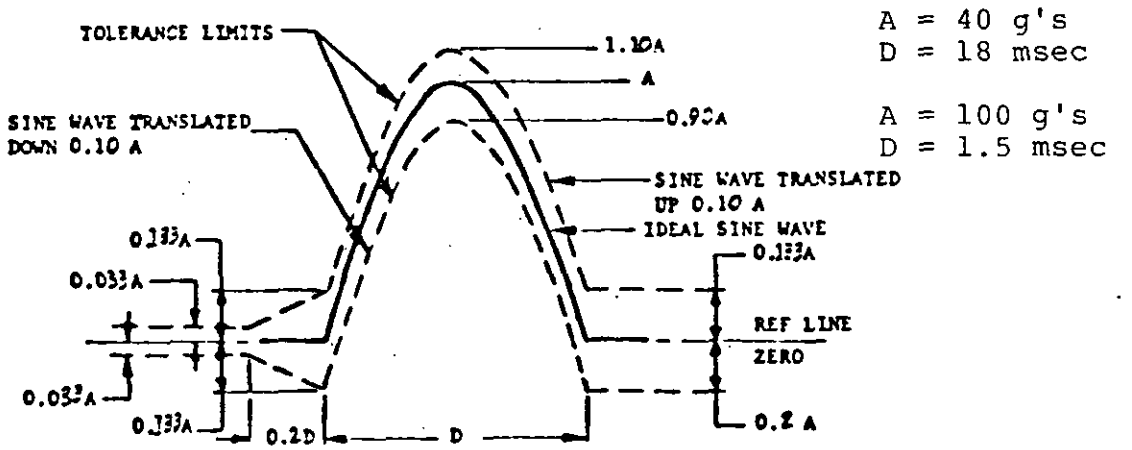


FIGURE 2. Shock Pulse.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:29Z
Check the source to verify that this is the current version before use.

3.4.4 Temperature cycling. The assembly shall be capable of operating as specified herein after withstanding exposure to temperature cycling and soaking between the temperatures of -25°F and 140°F in accordance with Figure 3 (see 4.6.2.5).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in the specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and standard commercial practice. Contractor inspection equipment designs shall be submitted for Government approval as specified in the contract (see 6.5).

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5 and 6.8).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

4.4 First article inspection. The requirements for first article approval and the designation of responsibility for first

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:29Z
Check the source to verify that this is the current version before use.

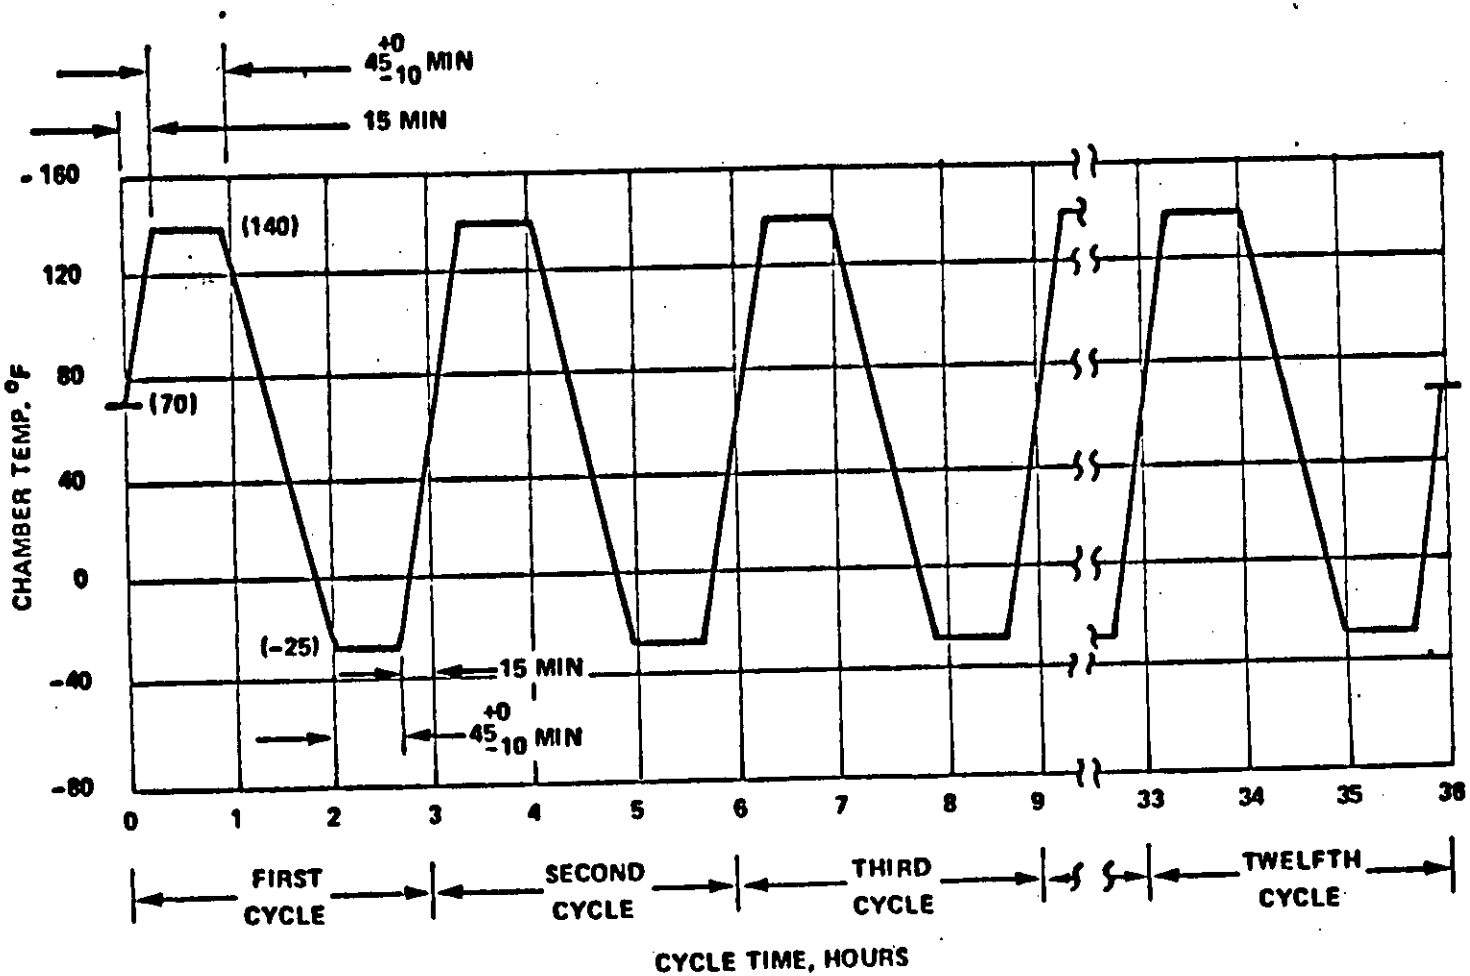


FIGURE 3. Temperature Cycling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

article inspection to either the Government or the contractor shall be specified in the contract (see 6.3).

4.4.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.4.2. The first article sample shall consist of two assemblies.

4.4.2 Inspections to be performed. Two assemblies shall be subjected to all the inspections specified in Tables VI, VII and VIII. Tests 301 and 302 of Table VIII shall be performed first.

TABLE VI. Performance tests.

Item	Characteristics	Requirement	Test Procedure
101	GCU APDS HEP/WP and FSDS ammo select logic	3.3.1	4.6.1.1
102	GCU HEAT ammo select logic	3.3.2	4.6.1.2
103	GCU mode select logic	3.3.3	4.6.1.3
104	Logic gating	3.3.4	4.6.1.4
105	Signal C resistor	3.3.5	4.6.1.5
106	115V ac detector	3.3.6	4.6.1.6
107	Reference voltages	3.3.7	4.6.1.7
108	GCU signal comparator	3.3.8	4.6.1.8

TABLE VII. Environmental tests.

Item	Characteristics	Requirement	Test Procedure
201	High Temperature	3.4.1	4.6.2.1
202	Low Temperature	3.4.1	4.6.2.2
203	Vibration	3.4.2	4.6.2.3
204	Shock	3.4.3	4.6.2.4
205	Temperature cycling	3.4.4	4.6.2.5

TABLE VIII. General tests.

Item	Characteristics	Requirement	Test procedure
301	Fabrication	3.1	Applicable dwgs - Visual
302	General specifications	3.1.2	4.6.3 - Visual
303	Packaging inspection	5.1	4.6.4 - Visual

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:29Z
Check the source to verify that this is the current version before use.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the assembly is procured for use as a:

Use	Plan
a. Logistics spare assembly apart from the next higher assembly	A, B and C
b. Component assembly of the next higher assembly	B and C

4.5.2 Inspection plan A.

4.5.2.1 Environmental sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each month's production, whichever occurs first. All the tests in Table VII shall be applied separately to the assembly.

4.5.2.2 Acceptance. When the sample assembly of the quantity produced fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be resubmitted for reinspection only after all assemblies are re-examined or retested and all defective assemblies are removed or defects corrected.

4.5.3 Inspection plan B.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative. All the tests in Table VIII and only the test of item 205 in Table VII shall apply. The following sampling plan (except that the visual examination for completeness, improper assembly and evidence of poor workmanship

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the current version before use.

per items 301 and 302 shall be performed 100%) shall be utilized:

100%, c=0 for lot sizes of 10 or less
n=10, c=0 for lot sizes of 11 to 150
n=32, c=0 for lot sizes greater than 150

where, n=sample size and c=0 requires zero defects during inspection for acceptance

4.5.3.2 Acceptance. Where any one assembly in the sample fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be resubmitted as above.

4.5.4 Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in Table VI and shall be examined visually for completeness, improper assembly and evidence of poor workmanship per items 301 and 302 of Table VIII. The conditions of 3.1.3 apply.

4.5.4.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.6 Methods of inspection.

4.6.1 Performance tests.

4.6.1.1 GCU ADPS, HEP/WP, and FSDS ammo select logic. Apply lamp loads, interconnection, power sources, and signal inputs per 3.3.1. Monitor the state of the load lamps and verify compliance with the requirements of 3.3.1.

4.6.1.2 GCU HEAT ammo select logic. Apply lamp loads, interconnections, power sources, and signal inputs per 3.3.2. Monitor the state of the load lamps and verify compliance with the requirements of 3.3.2.

4.6.1.3 GCU mode select logic. Apply lamp loads, interconnections, power sources, and signal inputs per 3.3.3. Monitor the state of the load lamps and verify compliance with the requirements of 3.3.3.

4.6.1.4 Logic gating. Apply power sources, interconnection, and signal inputs per 3.3.4. Measure the outputs to verify compliance with the requirements of 3.3.4.

4.6.1.5 Signal C resistor. The resistance of the pins specified shall be measured to verify compliance with the requirements of 3.3.5.

Source: https://assist.dla.mil Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

4.6.1.6 115V ac detector. Apply power sources, interconnections, and signal inputs per 3.3.6. Measure the outputs and verify compliance with the requirements of 3.3.6.

4.6.1.7 Reference voltages. Apply power sources and interconnection per 3.3.7. Measure the outputs and verify compliance with the requirements of 3.3.7.

4.6.1.8 GCU signal comparator. Apply power sources, interconnection, and variable signal per 3.3.8. Measure the output and verify compliance with the requirements of 3.3.8.

4.6.2 Environmental tests.

4.6.2.1 High temperature. Subject the assembly to the high temperature test specified in MIL-STD-810, Method 501 except storage temperature shall be 160°F for 48 hours. At the conclusion of the storage temperature test, stabilize the assembly at 100°F and subject it to the performance tests of Table VI. After testing, return the assembly to room temperature and subject it to the performance tests of Table VI.

4.6.2.2 Low temperature. Subject the assembly to the low temperature test specified in MIL-STD-810, Method 502. Maintain the temperature at -65°F for a period of 12 hours minimum. At the conclusion of the storage temperature test, stabilize the assembly at 40°F and subject it to the performance tests of Table VI. After testing, return the assembly to room temperature and subject the assembly to the performance tests of Table VI.

4.6.2.3 Vibration. Vibration A as specified in 4.6.2.3.1 shall be conducted only for first article inspection. Vibration B as specified in 4.6.2.3.2 shall be conducted only for quality conformance inspection.

4.6.2.3.1 Vibration A. Mount the assembly in a suitable vibration fixture and subject the assembly to the vibration test specified in MIL-STD-810, Method 514, General Procedures, and 3.4.2. The vibration amplitude shall have a tolerance of ±10%. The tolerance of the vibration frequency shall be ±2%, or ±1/2 Hz for frequencies below 25 Hz. Vibration sweeps shall be conducted with the duration of exposure not less than 80 minutes in each of three mutually perpendicular axes. At the conclusion of this test, subject the assembly to the performance tests of Table VI.

4.6.2.3.2 Vibration B. This test shall be conducted as in 4.6.2.3.1 except that the period of vibration shall be not less than 15 minutes in each axis.

4.6.2.4 Shock. Mount the assembly in a suitable shock fixture and subject it to the functional shock test for ground equipment specified in MIL-STD-810, Method 516, for a total of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

three half sine wave shock pulses in both directions along three mutually perpendicular axes (18 shocks). Peak amplitude shall be 40 ± 4 g's with a time duration of 18 ± 3 msec in accordance with Figure 2. At the conclusion of this test, subject the assembly to the performance tests of Table VI. Repeat this test with peak amplitude of 100.0 ± 10.0 g's with a time duration of 1.5 ± 0.2 msec in accordance with Figure 2.

4.6.2.5 Temperature cycling. With power and loads of Table I applied, subject the assembly to the temperature profile specified in Figure 3. At the conclusion of this test, subject the assembly to the performance tests of Table VI.

4.6.3 General specifications. Verification shall be provided by examination, visually or through the use of standard measuring equipment, in accordance with 3.1.2.

4.6.4 Packaging inspection. The sampling and inspection of the preservation, packaging, packing and container marking shall be in accordance with MIL-STD-2073-1.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with MIL-STD-2073-1. The level of protection shall be as specified in the procurement document (see 4.6.4 and 6.2d).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The Gunner's Control Unit Test Electronics circuit card (A10) assembly is intended for use in the Field Test Set, 11733200, which is used in the field for test of all of the M21 Computer subsystem components.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

c. Inspection provisions for first article (see 6.3).

d. Applicable levels of preservation, packaging, packing and container marking (see 5.1 and 6.7).

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the currentversion before use.

6.3 First article. The contracting officer should provide specific guidance to offerors for the submission of a first article sample to be tested as specified in 4.4.2. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Supersession. Previous revisions of MIL-C-48481(AR) were for the US Army Armament, Research, Development and Engineering Center's internal use only, and were not forwarded to the Naval Publications and Form Center for publication.

6.5 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, Attn: AMSTA-AR-QAC-F, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.6 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal. Technical data originally prepared by these activities is now under the cognizance of ARDEC.

6.7 Levels of packaging. The following definitions describe the three levels of packaging in accordance with MIL-STD-2073-1.

a. Level A - Adequate protection for indeterminate storage and worldwide distribution.

b. Level B - Adequate protection for known shipment conditions and storage conditions normally not exceeding one year.

c. Level C - Adequate protection for shipment to a known site for immediate use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:29Z
Check the source to verify that this is the current version before use.

6.8 Alternative quality conformance provisions. Alternative quality conformance procedures, methods, or equivalent, such as statistical process control, tool control, other types of sampling procedures, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions specified herein. Prior to applying such alternative procedures, methods, or equivalent, the contractor shall describe them in a written proposal submitted to the Government for evaluation. When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality assurance provision(s) herein. In cases of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor's quality program or detailed inspection system, as applicable. Unless otherwise specified in the contract, proposed alternative quality conformance provisions will be submitted by the contractor for evaluation by the technical activity.

6.9 Subject term (key word) listing.

Fire Control
Tank, M60A3
Test Set, Field, 11733200

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1240-0013)

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-48486C (AR)	950623

3. DOCUMENT TITLE
CIRCUIT CARD ASSEMBLY - GCU TEST ELECTRONICS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S. ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial 201-724-6629	(2) AUTOVON DSN-880-6629
c. ADDRESS (Include Zip Code) ATTN: AMSTA-AR-EDE-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:29Z
Check the source to verify that this is the current version before use.