INCH-POUND

MIL-DTL-82953A(OS)
8 August 1997
SUPERSEDING
MIL-DTL-82953
29 May 1996

DETAIL SPECIFICATION

INITIATOR, JAU-22/B

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for the JAU-22/B initiator.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents specified in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplements thereto, cited in the solicitation (see 6.2).

STANDARDS

MILITARY

MIL-STD-810	Environmental Test Methods and Engineering Guidelines
DOD-STD-2101	Classification of Characteristics

(Unless otherwise indicated, copies of Military standards are available from: Standardization Documents Order desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Indian Head Division, Naval Surface Warfare Center, Standardization Branch (Code 8420), 101 Strauss Avenue, Indian Head, MD 20640-5035, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by sending a letter.

AMSC N/A FSC 1377

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:32Z
Check the source to verify that this is the current version before use.

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

SPECIFICATIONS

Naval Sea Systems Command (CAGE Code 53711)

WS 13986	Propellant, Sheet Stock, NOSOL-318

(Application for copies should be addressed to the Commander, Indian Head Division, Naval Surface Warfare Center, Data Review and Control Branch (Code 8410P), 101 Strauss Avenue, Indian Head, MD 20640-5035.)

DRAWINGS

Naval Air Systems Command (CAGE Code 30003)

DL298AS116	Closed Chamber Assembly
DL838AS123	Closed Bomb Assembly for Testing Ignition Elements
DL844AS275	Initiator, JAU-22/B Assembly
838AS107	Test Fixture, Lock Shut
838AS139	Cartridge, Ignition Element
844AS276	Cap and Ignition Element Assembly
844AS278	Filter and Chamber Assembly
844AS281	Charge Holder, Loaded Assembly
844AS285	Ignition Element, Loaded Assembly
844AS288	Header Glass Sealed Assembly
844AS289	Propellant, NOSOL

(Application for copies should be addressed to the Commander, Indian Head Division, Naval Surface Warfare Center, Data Review and Control Branch (Code 8410P), 101 Strauss Avenue, Indian Head, MD 20640-5035.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E 1742	Standard Practice for Radiographic Examination

(Application for copies of ASTMs should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

AMERICAN NATIONAL STANDARD

ANSI/ASQC Z1.4	Sampling Procedures and Tables for Inspection by Attributes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Quality Control, PO Box 3005, 611 E. Wisconsin Ave., Milwaukee, WI 53201-4606.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

3.2 Materials. All materials used in the manufacture of the initiators shall conform strictly with the specifications referenced on the respective Naval Air Systems Command drawings unless specific approval in writing covering a departure therefrom has been obtained from the Navy cognizant field activity for initiators prior to manufacture. When alternate materials or methods of initiator manufacture are specified on the drawings, the bidder's selection shall be clearly stated in the proposal.

3.3 Primary components. For the purpose of this specification the ignition element loaded assembly (Drawing 844AS285) and the NOSOL flake and propellant (WS 13986 and Drawing 844AS289) are defined as primary components (see 3.3.1 and 3.3.2).

3.3.1 Ignition element loaded assembly. The ignition element used in the JAU-22/B initiator shall be in accordance with Drawing 844AS285 and loaded as specified therein. As a minimum the requirements of 4.7.5.3 shall be met.

3.3.2 NOSOL propellant.

3.3.2.1 Quantity. All propellant charges shall be as specified on Drawing 844AS281. All propellant charges shall be verified by weight 100 percent.

3.3.2.2 NOSOL flake. The NOSOL flake shall be in accordance with WS 13986 and Drawing 844AS281 and loaded as prescribed therein. NOSOL flake charges shall be determined by weight rather than by volume measurements.

3.3.2.3 NOSOL propellant. The NOSOL propellant, conforming to Drawing 844AS289 and WS 13986, shall be loaded as specified on Drawing 844AS281. The NOSOL propellant shall exhibit no evidence of decomposition.

3.4 Environmental Tests.

3.4.1 Shock. The initiators shall withstand shock conditions as specified in 4.2.1.1. After being subjected to the shock test, the initiators shall meet the nondestructive test requirements and the design performance requirements when test fired.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:32Z
Check the source to verify that this is the currentversion before use.

3.4.2 Six-foot drop. To ensure safety of handling and installation, the initiator shall not fire when dropped from a height of 6 feet as specified in 4.2.1.2. After being subjected to the six-foot drop test, the initiators shall meet the nondestructive test requirements and the design performance requirements when test fired.

3.4.3 Vibration. The initiators shall withstand vibration conditions as specified in 4.2.1.3. After being subjected to the vibration test, the initiators shall meet the nondestructive test requirements of 3.6 and 3.7, and the design performance requirements when test fired.

3.5 Visual inspection. Initiators shall be free of the following visible defects: burrs, dents, deep scratches, cracks, illegible markings, corrosion, foreign matter, nonconformity of the protective finish, incomplete or damaged threads, and other defects which could adversely affect installation or ballistic performance (see 4.7.1).

3.6 Radiographic examination. Initiators shall be free of imperfections in components of assembly as verified by radiographic examination of all first article and production test samples (see 4.7.2).

3.7 Bridge circuit resistance. The bridge circuit resistance of each completely assembled initiator, when measured electrically as specified in 4.7.3, shall be 1.1 ohms ± 0.15 ohms.

3.8 Breakaway torque test. The chamber and cap of the assembled initiator shall withstand a breakaway torque application of 50 ± 5 ft-lb without loosening or deformation (see 4.7.4).

3.9 Ballistic requirements. Initiators from each first article and production lots, selected in accordance with 4.8.1, shall meet the requirements listed below when subjected to the test prescribed in 4.8.2. Any initiator which fails to meet one or more requirements shall result in rejection of the lot represented.

3.9.1 Pressure. The upper limit of pressure shall be 1650 psi and the lower limit 1050 psi.

3.9.2 Ignition time. The time between the application of firing current to the initiator and the start of pressure rise in the chamber of the text fixture shall not exceed 0.050 second.

3.9.3 Misfire. The initiator shall fire when proper firing energy is applied (see 4.8.2).

3.10 Lock shut requirements. Initiators from each first article sample and production lot, selected in accordance with 4.2 and 4.8.1, shall exhibit no mechanical failure, including the breakaway torque and gas venting, when subjected to the test prescribed in 4.8.3.

3.11 Packaging and marking. The packaging of initiators and the container markings shall be in accordance with section 5.

3.12 Workmanship. Initiators shall be constructed and finished in a manner to assure compliance with all requirements of this specification. Particular attention should be directed to dimensions, finishes, sealants, and assembly operations.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:32Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2)
b. Production inspection (see 4.3)

4.2 First article inspection. Before entering into quantity production, a first article sample of 32 initiators, 5 cap and ignition element assemblies, and 3 header and glass seal assemblies shall be prepared, see table I. Additional initiators, as specified in the contract, shall be retained for investigative purposes. A first article sample acceptable for environmental and functional testing shall be defined as a sample which has met the requirements of 3.2 through 3.11 of this specification. The failure of any initiator to meet the acceptance requirements as stated above shall cause rejection of the first article sample. Any quantity production prior to notification by the contracting agency of preproduction sample acceptability shall be at the contractor's risk.

TABLE I. First article inspection.

Nature of Requirement	Number of Samples										Test Paragraph
Visual Inspection	4	6	4	7	7	2	2			*	4.7.1
Radiographic examination	4	6	4	7	7	2	2			*	4.7.2
Bridge circuit resistance	4	6	4	7	7	2	2			*	4.7.3
Breakaway torque test	4	6	4	7	7	2	2			*	4.7.4
20g Shock	4										4.2.1.1
Six-foot drop		6									4.2.1.2
Vibration			4								4.2.1.3
Cap & ignition assembly								5			4.7.5
Header & glass assembly									3		4.7.6
Radiographic examination	4	6	4	7	7	2	2			*	4.7.2
Bridge circuit resistance	4	6	4	7	7	2	2			*	4.7.3
Ballistic test at −65 ± 5°F 70 ± 5°F 200 ± 5°F	4	6	4	7	 7			5			4.8.2
Lock Shut at −65 ± 5°F 200 ± 5°F						2	 2				4.8.3

* Retained samples, see contract

4.2.1 Environmental Tests.

4.2.1.1 Shock. This test shall be conducted in accordance with Method 516.4 Procedure 1 of MIL-STD-810C. The shock pulse wave form shall be terminal peak sawtooth. The peak amplitude shall be 20g and the duration shall be 11 msec. After the shock test has been completed, the initiators shall be subjected to the nondestructive tests and fired per table I.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:32Z
Check the source to verify that this is the current version before use.

4.2.1.2 Six-foot drop. Three initiators shall be dropped onto a 2-inch-thick (minimum) steel plate embedded in concrete to impact as follows: (1) one nose up, (2) one nose down, and (3) one horizontal. A new initiator shall be used for each drop. No device shall fire during this test. After the drop test has been complete, the initiators shall be subjected to the nondestructive tests and fired per table 1.

4.2.1.3 Vibration. Initiators shall be subjected to vibration test in accordance with MIL-STD-810C, figure 514.2-2, curve H (see 3.4.3).

4.2.1.3.1 Procedure.

a. Verify that the vibration test fixture does not have any resonant vibration frequency between 5 and 2000 Hz. See Figure 1.

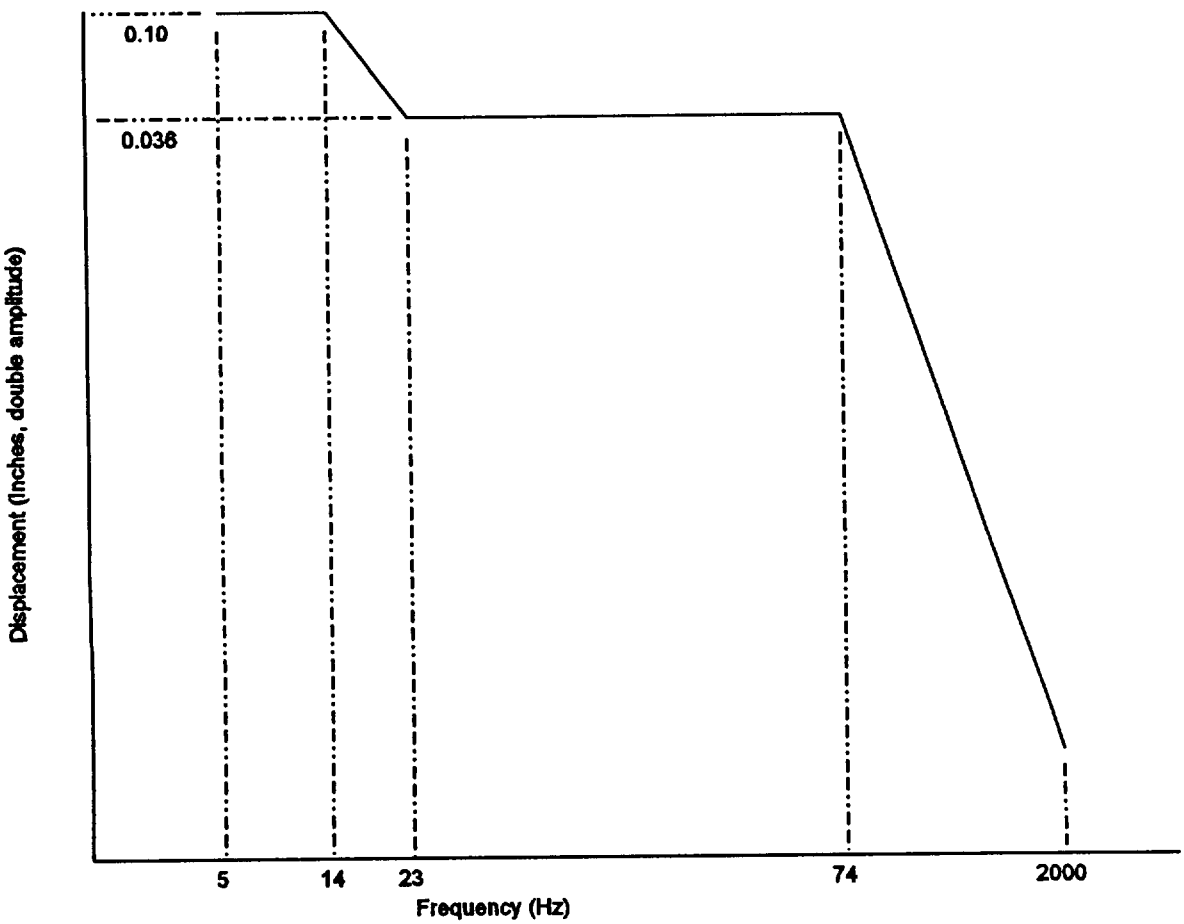


FIGURE 1. Vibration H-curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

b. Secure initiators into the vibration test fixture using 45 ± 3 inch pounds. Anti-seize compound will be applied to the fixture threads prior to installation of the initiators. The three mutually perpendicular axes will be used for vibration testing. Vibration time will be 1 hour per axis per temperature for a total of 9 hours.

c. Perform sinusoidal vibration cycling at 70°F for 1 hour with the frequency varying logarithmically from 5 to 2000 Hz and return to 5 Hz in approximately 20 minutes to the levels. Continue this until 1 hour of cycling has been completed.

d. After completion of the 1-hour cycling period the vibration fixture will be rotated 90 degrees so the initiators are positioned in a different axis than in step c. The initiators in this new axis position will then be vibrated per step c for 1 hour at 70°F.

e. After completion of the second 1-hour cycling period the vibration fixture will again be rotated 90 degrees so that the initiators are positioned in a different axis than in step c or d. The initiators in this new axis position will then be vibrated per step c for 1 hour at 70°F.

f. After completion of three 1-hour cycling periods (1 hour per axis) at 70°F the procedure outlined in steps c through e will be repeated with the temperature at 200°F in lieu of 70°F.

g. After completion of three 1-hour cycling periods (1 hour per axis) at 200°F the procedure outlined in steps c through e will be repeated with the temperature at -65°F in lieu of 200°F.

4.3 Production inspection. Inspection lot definition, formation, and size shall be in accordance with ASQC Z1.4. Unless otherwise specified in the contract, the minimum and maximum production lot sizes shall be 1201 initiators and 10,000 initiators, respectively. Ballistic test sample size shall be in accordance with 4.8.1.

4.4 Classification of characteristics. The characteristics verified by the tests and examinations herein are classified as critical, major or minor in accordance with DOD-STD-2101. Tests and examinations that verify critical characteristics are identified by the symbol (C) and major characteristics by the symbol (M). The number following the classification symbol indicates the serial number of test or examination. Tests and examinations which are not annotated with a classification code are classified minor.

4.5 Quality conformance. Quality conformance inspection shall consist of verification of the characteristics classified on the drawings of DL844AS275 and the verification of the requirements listed in table II.

4.6 Lot Acceptance inspections. Lot acceptance inspection shall consist of the examinations and tests specified in table III. Failure of any sample cartridge to comply with the requirements listed in table III shall be cause for rejection of the lot represented.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

TABLE II. Quality conformance inspection.

Item	Nature of Requirement Verification	Applicable paragraphs	Classification
Primary component	Single lot	3.3, 3.3.1, 3.3.2	(M101)
Initiator	Radiographic	3.6, 4.7.2	(M102)
Initiator	Visual inspection	3.5, 4.7.1	(M103)
Initiator	Bridge circuit resistance	3.7, 4.7.3	(M104)
Initiator	Packaging, packing, and container markings	3.11, 5.1	(M105)

TABLE III. Ballistic Test for Production Sample.

Nature of Requirement	Number of Samples					Test Paragraph
Visual Inspection	20	20	20	10	*	4.7.1
Radiographic examination	20	20	20	10	*	4.7.2
Bridge circuit resistance	20	20	20	10	*	4.7.3
Breakaway torque test	20	20	20	10	*	4.7.4
Lock shut at 70°F				10		4.8.3
Ballistic test at −65 ± 5°F	20					4.8.2
70 ± 5°F		20				
200 ± 5°F			20			

* Retained samples, see contract

4.7 Tests.

4.7.1 Visual inspection. Examine all initiators and reject those having any of the defects of 3.5.

4.7.2 Radiographic examination. Initiators for ballistic testing and assemblies of five cap and ignition elements shall be radiographically examined in accordance with ASTM E 1742. Any observable imperfections in components or assembly shall be cause for rejection, see 3.6. Failure to meet sample requirements shall result in 100 percent radiographic screening of the production lot at the contractor's expense.

4.7.3 Bridge circuit resistance. Conformance with the bridge circuit resistance of 3.7 shall be ascertained by means of a test circuit which limits the bridge current to 25 milliamperes, maximum. A safety chamber with an interlock switch shall be used to protect the operator during the application of current. A suitable instrument which is known to be accurate to within 1 percent in the range of resistance specified shall be used to determine whether or not the requirement is being met. Units which fail to meet the requirements of 3.7 shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

4.7.4 Breakaway torque test. The test specified in 3.8 is to be performed before the initiators are conditioned and fired. Prior to performing the test, scribe an index line on the initiator cap and chamber of the initiators to be tested. Movement of the scribed index line on the cap and chamber during the test shall be cause for rejection of the entire production lot or first article sample.

4.7.5 Cap and ignition element assembly inspection. Five JAU-22/B cap and ignition element assemblies shall be subjected to the following tests and inspections.

4.7.5.1 Visual inspection. The cap and ignition element assemblies shall be visually inspected to verify conformance to Drawing 844AS278

4.7.5.2 Electrode recess. The electrode recess of the cap and ignition element assembly shall be measured and meet the depth requirement of Drawing 844AS276.

4.7.5.3 Ignition element ballistic test. The remaining five cap assemblies shall be resistance checked and subjected to the power-current test where each assembly shall be subjected to 1 ampere or 1 watt of power for 5 minutes minimum. No ignition elements shall fire. After the power-current test, the ignition elements shall be pressed out of the caps and that force recorded. If any ignition element requires less than 300 pounds force for removal, the first article shall be rejected. Each ignition element shall be pressed into a modified cartridge case per Drawing 838AS139, then resistance checked and test fired in a closed chamber per Drawing DL838AS123. The assembly shall be conditioned at 70°F for 4 hours minimum. Any assembly that takes longer than 10 ms to fire or 25 ms to reach maximum pressure or generates less than 2000 psi shall be cause to reject the first article.

4.7.6 Header and glass seal test. The three assemblies shall be visually inspected and subjected to the following tests. Failure of an assembly to meet the requirements of Drawing 844AS288 shall be cause for rejection.

4.7.6.1 Insulation resistance. Each assembly shall be subjected to 500 volts direct current (dc) minimum between the electrode and header. The equipment shall have an accuracy of ± 1 percent and the resistance of each assembly shall be 50 megohms or greater.

4.7.6.2 Bonding test. Each assembly shall be subjected to a static load of 20,000 ± 500 psi. The assembly shall be supported on the recessed electrode end and the load applied to the glass on the output end. The glass shall show no evidence of damage or displacement after the test.

4.8 Ballistic and lock shut tests.

4.8.1 Sampling. A sample of 70 initiators shall be randomly selected from each production lot for the ballistic test of 4.8.2. Sixty of these initiators shall be expended in the tests of 4.8.2 and ten shall be fired lock shut. Additional initiators, as specified in the contract (see 6.2), shall be retained for investigative purposes (see table III).

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:32Z
Check the source to verify that this is the currentversion before use.

4.8.2 Ballistic test. Conditioning time for initiators shall be at least 6 hours but not more than 24 hours for all groups, see table III. Each initiator shall be inserted into a test fixture, Drawing DL298AS116, and fired within 3 minutes after removal from conditioning. If any initiator is exposed or not fired within 3 minutes after removal, it shall be returned to the 70° ± 5°F environment for at least 4 hours and then reexposed to the original environment for at least 6 hours but not more than 24 hours before test firing. The firing current shall be 5 + 1.0, -0.0 amperes dc.

4.8.2.1 Criteria of acceptability. Accept on zero defects and reject on one or more.

4.8.3 Lock shut test. A sample of 10 initiators from each production lot shall be conditioned for a minimum of 6 hours at 70 ± 5°F and shall be fired in a fixture, Drawing 838AS107, that prevents the gases from venting through the initiator orifice. Firing current shall be 5 + 1.0, -0.0 amperes dc (see 3.10).

4.8.3.1 Criteria of acceptability. Any initiator (ballistic or lock shut) that exhibits mechanical failure or any component which results in failure to contain the propellant gases shall cause rejection of the lot represented.

4.8.4 Retest. There shall be no retests.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The JAU-22/B initiator is used to eject search stores from antisubmarine warfare aircraft.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1, 2.2.2, and 2.3).

c. Production lot size and test activity (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:32Z
Check the source to verify that this is the currentversion before use.

d. Directions for shipping radiographs of entire production lot along with the ballistic sample to the activity conducting the first article and production lot tests.

e. Packaging and marking if other than as specified (see 6.5).

f. That the safety precaution requirements of the "Contractor's Safety Manual for Ammunition, Explosives, and Related Dangerous Material," DOD 4145.26M are applicable. NOTE: When this specification is used as part of the description of work to be accomplished by a Government activity, the safety precaution requirements of "Ammunition and Explosives Ashore" OP 5 are applicable.

6.3 First article. When a first article inspection is required, the contracting officer should provide specific guidance to offerors whether the items should be a first article sample or a sample selected from the first production items (see 3.1), and the number of items to be tested as specified in 4.2. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examination, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Definition.

6.4.1 Level A packaging. The degree of preservation and packaging which will afford adequate protection against corrosion, deterioration, and physical damage during shipment, handling, indeterminate storage, and world-wide redistribution.

6.5 Contract packaging and marking. The following packaging and marking requirements should be called out in the contract.

6.5.1 Preservation and packing. In addition to the following, Level A and commercial preservation/packing should be in accordance with 49 CFR 171-199 and NAVSUPINST 4030.28A of 20 June 1975.

6.5.1.1 Packaging for service use. Level A preservation and packing should be used for packaging all production lots for service use and should be in accordance with Drawings 275AS107 and 275AS108.

6.5.1.2 Packaging for immediate use. Commercial preservation and packing should be used for packing of all initiators which are intended for expenditure in first article and production lot acceptance tests.

6.5.2 Marking.

6.5.2.1 Special marking. Marking of inner and outer containers should be in accordance with the applicable drawings listed on DL844AS275 and with 49 CFR 171-199.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:32Z
Check the source to verify that this is the current version before use.

6.5.2.2 Normal marking. Unless otherwise specified in the contract or order, the marking information of the inner and outer containers should be as specified below:

Inner Container Marking

a. NSN/DODIC 1377-01-110-7306/MF64
b. Initiator, JAU-22/B
c. Drawing 844AS275
d. Quantity
e. Lot number in accordance with MIL-STD-1168
f. DOT explosive Class C

Outer Container Marking

a. NSN/DODIC 1377-01-110-7306/MF64
b. Initiator, JAU-22/B
c. Drawing 844AS275
d. Quantity
e. Gross weight and cube
f. Lot number in accordance with MIL-STD-1168
g. Contract or purchase order number
h. WARNING: EXPLOSIVE DEVICE, CLASS C EXPLOSIVE, HANDLE CAREFULLY, KEEP AWAY FROM FIRE

Additionally, the above specified marking information should be applied to the containers in accordance with the applicable provisions of MIL-STD-129.

6.5.3 Explanation of terms. For the purpose of this specification, NAVSUPINST 4030.28A (20 June 1975) paragraphs 1-4, 2-2, 2-3, and Appendix A, when applicable, should be used to clarify terms.

6.5.4 Palletization.

a. Exterior containers should have no single dimension (length, width, height) exceeding 52 inches. When the total of all containers in the shipment exceeds 30 cubic feet, they should be palletized using pallets conforming to MIL-I-15011. Each palletized unit load should not exceed 2200 pounds and dimensions as follows:

   (1) Length should not exceed 42 inches, which permits an overhang of 1 inch at each end of the 40-inch dimension of the pallet.

   (2) Width should not exceed 52 inches, which permits an overhang of 2 inches at each end of the 48-inch dimension of the pallet.

   (3) The total height, including pallet, should not exceed 52 inches for explosive items and 54 inches for nonexplosive items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

b. Palletized loads of dangerous material will be made up to provide easy accessibility to any one container in case of emergency.

c. All wood container blockings and pallets should be treated with wood preservative conforming to TT-W-572, Composition A.

d. The outside packaging (i.e., pallet crate, etc.) will contain only items from the same lot.

6.6 Subject term (key word) index.

Ignition element
NOSOL flake
NOSOL propellant

Preparing Activity
Navy - OS
(Project 1377-0071)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-DTL-82953A(OS)	970812

3. DOCUMENT TITLE
INITIATOR, JAU-22/B

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
COMMANDER, INDIAN HEAD DIVISION NAVAL SURFACE WARFARE CENTER (CODE 8410T)	(1) Commercial 301-743-4700	(2) AUTOVON 354-4700
c. ADDRESS (Include Zip Code) 101 STRAUSS AVENUE INDIAN HEAD, MD 20640-5035	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:32Z
Check the source to verify that this is the current version before use.