Superseding
MIL-M-63043 (TM)
27 May 1970

MILITARY SPECIFICATION

MANUALS, TECHNICAL: MISSILE SYSTEM EQUIPMENT CHECK PROCEDURES

This specification is approved for use by Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1-1. **Scope.** This specification contains the detail requirements for preparing check procedure technical manuals for missile system equipment.

1-2. **Classification.** The types of technical manuals to be prepared in accordance with this specification are:

Type -10	Operator's Check Procedures Manual
Type -20	Organizational Check Procedures Manual
Type -12	Operator and Organizational Check Procedures Manual

2. APPLICABLE DOCUMENTS

2.1. The following documents, of the issue in effect on the date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-M-38784 — Manuals, Technical: General Requirements for Preparation of

MIL-M-63036 — Manuals, Technical: Operator's Preparation of

MIL-M-63038 — Manuals, Technical: Organizational or Aviation Unit, Direct Support or Aviation Intermediate, and General Support Maintenance

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1. General.

3.1.1. *Format.* Check procedures shall be prepared in tabular form, with each table divided into steps (fig. 1). Step numbers shall indicate the sequence in which the individual checks are to be performed. Each step shall show the step number, the operation which is to be performed, the normal indication which should result from the operation, and the appropriate corrective procedure to be taken in case the normal indication is not obtained.

3.1.2. *Functional breakout.* The first step in the preparation of check procedures shall be a logical functional breakout to determine how many tables are required, the content of each table, and the sequence in which the tables should be arranged. Functional breakout is accomplished by a process of reverse engineering — of going through in reverse the process

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to:
Commander, US Army Missile Command, ATTN:DRSMI-NP, Redstone Arsenal, AL 35898, by using the self-addressed Standardization Document Improvement Proposal(DD Form 1426) appearing at the end of this document or by ltr.

TMSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

the engineers went through in designing the equipment. The writer thinks in terms of the basic function, then of the several subfunctions necessary to support the basic function. The number and size of the resulting functional groups will vary with different equipment. If each end item of a missile system performs a different function, the end item can form the basis for functional breakout. If, however, the functional interplay among the end items, or a group of end items, is such that no end item performs a distinct function, it would be a breach of logic to plan a volume of functional coverage for each end item. Instead, a volume on each function or group of related functions would be appropriate. A complex system may require several volumes.

3.1.2.1. *Logic of functional breakout.* Figure 1 is a sample from a check procedure on the AN/MPQ radar prepared in accordance with functional breakout. As the first step in functional breakout of this acquisition radar, its basic or overall function was established as being to acquire information about specific targets. Next, the subfunctions required to support the basic function were determined. An acquisition radar must transmit a signal into space, receive an echo, and display the echo on a video scope. It must have a source of power and the antenna must operate properly. This analysis established the subfunctions as power distribution, transmitting, receiving, antenna positioning, and video. Functional sequence for the checks was determined through logic based on dependency of checks. If the power supplies are out, nothing else can operate properly. Therefore, the power supplies were placed first in the sequence of checks. The transmitting function was placed next in sequence since it must operate properly before any of the remaining groups can perform satisfactorily. If no signal is transmitted, none can be received and displayed. The receiving function was selected as next in sequence. It follows transmitting because receiving is directly dependent on transmitting for normal operation. It precedes antenna positioning because there would be no logic in positioning the antenna until the receiver is functioning properly. The antenna positioning system was placed next in dependency sequence because it provides an azimuth reference input which allows the video system to display accurate target information. Thus, the functional groups have a logical dependency which must be reflected in the check procedures. This dependency logic can be compared with troubleshooting in which the technician makes sure he has an input before checking for an output. Through this functional breakout and dependency analysis, it was determined that the check procedures for this radar should consist of the following five tables in sequence: main power and power supplies check, transmitter check, receiver check, antenna positioning check, and video check.

3.1.3. *Convenience considerations.* Check procedures shall be functionally organized; however, consideration shall be given to the convenience of the operator or technician performing the checks to the extent compatible with the functional concept. For example, a check procedure shall not require a technician to climb to the top of a radar antenna repeatedly to perform checks which could be performed with one trip without detracting from the functional organization of the check procedure.

3.1.4. *Check procedure intervals.* Check procedure intervals shall insure that the equipment will remain in adjustment for the specified interval (daily, weekly, monthly). For example, a function that can be depended on to remain in adjustment (under normal operating conditions) for at least a week and less than a month shall be assigned a weekly check interval. If dependability is under a week, the function shall be included in a daily check. Design and maintenance engineers can assist writers in determining the depth and interval of the checks. The nature of the equipment shall be the determining factor. The longer-interval checks will always be more thorough than the shorter. A weekly check shall include everything covered in the daily check plus those additional checks to be performed weekly. A monthly check shall include everything in the daily and weekly checks plus the additional checks to be performed monthly. When feasible, however, the shorter-interval check shall be referenced rather than repeated. Checks may be combined as described herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

3.1.5. *Continuity of checks.* Each set of checks (daily, weekly, monthly, etc.) shall be prepared with the assumption that the operator or technician will perform the complete daily, weekly, monthly, or other check continuously and in sequence. In performance of the weekly checks for the radar equipment discussed in 3.1.3, for example, it is assumed that the technician will proceed through all five tables in sequence. The main circuit breaker is placed in the ON position in the first step of the first table and remains in that position throughout the power, transmitter, receiver, antenna positioning, and video checks. This principle of continuity applies only to a set of checks for a specific interval: daily, weekly, or monthly, for example. The check procedures shall not be prepared with the assumption that the operator or technician proceeds directly from the daily to the weekly checks. Also, the operator or technician may need to perform only one individual check, as in troubleshooting. Figure 3 illustrates a check procedure so prepared that the checks can be performed individually or out of normal sequence as well as continuously and in sequence. The first step of each table indicates a particular equipment condition and indicates the correct setting of any switches critical to the check. When any table is performed individually, the equipment is conditioned in accordance with this first step. If tables are performed in sequence, the first step is not performed but serves as a handy check of switch positions.

3.1.6. *Alinement.* The monthly check procedures shall be presented in such a manner that the system will be completely alined upon performance of the monthly check procedures in sequence.

3.2. Preparation (Types -10, -20, and -12). These manuals shall include check procedures for missile system equipment performed by the operator and organization. The type, number, and title shall be as specified by the procuring activity. The arrangement of the manual shall be as follows:

Front Matter
Chapter 1 — Introduction
Chapter 2 and additional chapters and titles as required

3.2.1. *Front matter.* Prepare applicable front matter in accordance with MIL-M-38784 and MIL-M-63036 or 63038.

3.2.2. *Chapter 1.* Prepare applicable chapter 1 in accordance with MIL-M-38784 and MIL-M-63036 or 63038.

3.2.3. *Chapter 2 and additional chapters and titles as required.* This portion shall consist of chapter 2 and other chapters with functional titles as required by the complexity of the equipment, or as specified by the procuring activity.

3.2.3.1. *Check procedures format.* Figures 1 and 3 illustrate two formats for check procedures tables. The check procedures illustrated by figure 1 were so prepared as to include both daily and weekly checks in one set of tables. Shading was used to identify the daily checks. Either of the formats or a combination of them may be used. The format selected shall be that which provides optimum presentation. Once selected, a format shall be used throughout a manual. When check procedures are included as a section or chapter in an operator or maintenance manual, the format of the check procedures should generally reflect the style of the rest of the manual. The format shall be specified or approved by the procuring activity.

3.2.3.2. *Instructions for preparation of tables.*

a. Tables shall be numbered in sequence within each chapter; a new table may start in the middle of a page following the end of a preceding table.

b. Column width may vary from page to page for best utilization of page space.

c. Numbered step and normal indications shall be in boldface type.

d. Within each table, the location of controls and indicators shall be given only once unless repetition is necessary to prevent confusion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

e. Front-panel controls and indicators which are placarded with functional names shall be called by the functional names without reference designators. Example:

Rotate the RECEIVER GAIN knob fully clockwise.

f. Functional names shall be used for front-panel controls which are not placarded or panel-stamped. The functional names shall be the same as those used on the unit and functional schematic diagrams. Example:

Set plotting board conditions switch to . . .

g. Controls (knobs, switches, variable resistors, etc.) on chassis that are placarded or panel stamped shall be called by the placarded or stamped name and the description. Example:

Adjust the AGD VID variable resistor on . . .

h. Nonplacarded controls on chassis shall be called by the functional names used on the unit and functional schematic diagrams followed by the reference apparatus designator. Example:

Adjust delay time R1 on the . . .

i. Operations shall be stated in complete sentences written in the imperative mood.

j. For each entry in the normal indication column there shall be some form of corrective procedure. The corrective procedure shall be an adjustment, a reference to another check procedure for abnormal indications, a figure reference to a functional schematic, or a reference to troubleshooting procedures. When the corrective procedure is an adjustment, a reference to the functional schematic diagram on which the control or indicator is shown shall be included. When the corrective procedure is a reference to another check procedure in the manual, a schematic reference shall not be given. The preferred corrective procedure is an adjustment which will produce the normal indication. Before listing an adjustment, however, it shall be ascertained that the adjustment and the required repair parts, tools, and test equipment are authorized and available at the maintenance level for which the check procedures are being prepared. Determination shall be based on the preliminary maintenance allocation chart (PMAC), Logistics Support Analysis Record (LSAR), or maintenance allocation chart (MAC) and knowledge of the tools and test equipment available.

k. Illustrations and waveforms shall be used when necessary to demonstrate unusual procedures, show cable connections, or depict waveforms. Illustrations shall be placed in the check procedures tables (fig. 4) unless they are so large as to make this impractical. Illustrations and test layouts, which are too large for practical inclusion in the tables, shall be placed on the facing page to the applicable procedure. See MIL-HDBK-63038-1 for general requirements for illustrations.

l. Check procedures shall be so worded as to preclude unnecessary adjustments. In the following example, the operator is encouraged to adjust R19 even though it may not need adjustment:

Step	Operation	Normal indication	Corrective procedure
1	Rotate R19 until	The FUNCTION meter indicates in the tan area.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

The wording below is preferred unless it is mandatory that R19 always be adjusted. Here the operator is discouraged from making any adjustment unless the meter indicates outside the tan area.

Step	Operation	Normal indication	Corrective procedure
1	Observe the FUNCTION meter.	The FUNCTION meter indicates in the tan area.	Adjust R19.

3.3. Validation and verification. (See MIL-M-63036 or MIL-M-63038.)

4. QUALITY ASSURANCE PROVISIONS

This section is not applicable to this specification.

5. PREPARATION FOR DELIVERY

(See MIL-M-38784.)

6. NOTES

6.1. Intended use. The manuals prepared in accordance with this specification provide a source of maintenance instruction and information to the levels indicated by the specific manual covered.

6.2. Ordering data. The procurement documents shall specify:

a. Title, number, and date of this specification.

b. Type, number, and title of the technical manual.

c. Chapter 2 and additional chapter titles. (See 3.2.3.)

d. Check procedures format. (See 3.2.3.1.)

Custodian:
Army — TM

Preparing activity:
Army — MI

Review activities:
Army — TRADOC

User activities:

DOD — NS

Project Number TMSS A190

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

2-8. Check Procedures

a. This paragraph contains check procedures to make certain that the CWAR is operating correctly. If a normal indication is not obtained when performing the checks as listed, make certain that the correct procedure is being used and that the external test equipment being used is operating correctly before troubleshooting for defective units.

b. The following sample table explains the use and layout for the check procedure tables. Notice that an indentation for text contained in the table alines with the table headings. That is, the operation, normal indication, and corrective procedure headings and text are alined as depicted by the vertically arrowed lined. Although the arrowed lines do not appear in the actual tables, the indentations do apply.

Table 0-0. Sample Table

Step	Operation	Normal indication	Corrective procedure
1.	Check (Step Name)		Sequence and step name of the specific check.
	(OPERATION)		Sequential operations required to obtain an indication.
	a.		
	b.	(NORMAL INDICATION)	
			Normal system or circuit responses
			(CORRECTIVE PROCEDURES)
			Adjustment listing if applicable: Unit or chassis most likely malfunctioning: Reference to functional diagrams contained in TM 9-XXXX-XXX-XX-X for troubleshooting aid.

Figure 1. Sample check procedures — Format 1 (sheet 1 of 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

Table 0-0. Main Power and Power Supplies Check — Continued

Step	Operation / Normal indication / Corrective procedure
1.	**Check Main Power — Continued.**
	b. Connect and energize transmitter test sets A and B (figs. 0-00 and 0-00) as illustrated in figure 0-00 to allow warmup prior to performing table 0-0.
2.	**Check Standby.**
	Press the STANDBY pushbutton (20, fig. 0-0).
	The STANDBY lamp (21, fig. 0-0) illuminates.
	The receiver-transmitter and radar set group blowers blow air outward.
	Check the standby interlock circuitry.
	Refer to the energizing and control circuits functional diagram.
3.	**Check Magnetron Filament Current.**
	Note. If the radar is to be placed in false radiate or is to be left in standby for more than five minutes remove the MAG FIL SUP fuse (0, fig. 0-0) and set the MAGNETRON switch (17, fig. 0-0) to OFF.
	The MAGNETRON FIL CURRENT meter (5, fig. 0-0) indicates 3.0 to 4.5.
	High-voltage power supply (3A4A4).
	Rf modulator-oscillator (3A7A1A1).
	Refer to the magnetron power distribution circuits functional diagram.
4.	**Warning: Use extreme caution during all adjustments below since 416 vac is present in the radar set group on utility transformer T1 and on the diode rectifiers in each power supply.**
	Check no. 1 — 6.3-Vdc Power Supply.
	a. Set the LV PWR SUPS selector switch (7, fig. 0-0) to no. 1 — 6.3.
	The LV PWR SUPS meter (6, fig. 0-0) indicates the yellow area.
	Perform steps *b* and *c*.
	b. Press and hold the MOMENTARY INTERLOCK OVERRIDE pushbutton (15, fig. 0-0). Open the fuse and control panel (12, fig. 0-0), and press and lock the interlock switch (6, fig. 0-0). Release the MOMENTARY INTERLOCK OVERRIDE pushbutton.
	c. Adjust the 6.3V ADJ (2, fig. 0-0) until
	The LV PWR SUPS meter indicates the red line.
	Power supply (6.3 vdc) (3A4A7).
	Refer to the 6.3-vdc circuits functional diagram.

Figure 1. Sample check procedures — Format 1 (sheet 2 of 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

CHAPTER 2

COMPUTER SYSTEM AND MULTICHANNEL DATA-RECORDER CHECK PROCEDURES

Section I. GENERAL

2-1. Scope.

a. This chapter contains the daily, weekly, monthly, nonperiodic, and special checks in tabular form. Performance of the daily, weekly, monthly, and nonperiodic checks will insure that the equipment is capable of reliable operaion. The special checks will be used to determine if the equipment is operating correctly when a part is replaced. Failure to perform the checks at the intervals specified may result in inefficient operation or failure of the equipment to perform its required function at a critical moment.

b. Connection of the AN/MPQ-36 or AN/MPQ-T1 trainer will affect the performance of checks in some instances. Before performing any check procedures on the computer, insure that the trainer is deenergized below the STANDBY condition. If a check does not fall within the specified tolerances after an adjustment is made, manually disconnect the trainer cables and repeat the adj ustment to determine the source of the malfunction.

2-2. Contents.

a. The material in this chapter is grouped in 56 tables. The content of the tables is described in *b* below. The steps in each table should be performed in sequence. The only illustrations included in this chapter are typical altitude plotting-board plots and multichannel data-recorder charts. All major items, assemblies, and subassemblies are identified by TM nomenclature. Proper use of the check procedures tables is described in (1) and (2) below.

NOTE

All corrective procedure adjustments in the daily, weekly, and monthly tables that are preceded by an asterisk and all check procedures contained in the nonperiodic and special check procedures tables must be performed by a maintenance technician.

(1) In using the tables, first perform the operation described in the Operation column and observe the indication. If the indication is within tolerances specified, proceed to the next operation. If the indication is not within the specified tolerances, perform the adjustment given in the Corrective procedure column. If the adjustment does not correct the indication or if an adjustment is not given, the maintenance technician should refer to the functional schematic figure reference provided in the Corrective procedure column. Adjustments which are required at more frequent intervals than specified by the check procedure are indicative of a malfunction.

(2) In localizing a trouble, the maintenance technician should use the appropriate functional schematic diagram. References to the functional schematic diagrams are listed in the Corrective procedure column to aid in isolating causes of a trouble. If the applied troubleshooting techniques indicate that the probable cause is a component listed in TM 9-XXXX-XXX-X, TM 9-XXXX-XXX-XX, or TM 9-XXXX-XXX-XX-X, replace the component. If the component is not listed, its repair or replacement is reserved for supporting maintenance personnel. When the trouble has been corrected, proceed to the next step.

b. A description of the contents of sections II through VI in this chapter is given in (1) through (5) below.

(1) *Section II. Daily check procedures.* This section contains the steps to be followed when performing daily checks. These steps must be performed in the sequence listed to determine complete computer system reliability. However, each check is written so that it may be performed independently for maintenance convenience or other purposes.

(2) *Section III. Weekly check procedures.* This section contains the steps to be followed when performing weekly checks. These steps must

Figure 2. Example of descriptive material for check procedures (sheet 1 of 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

be performed in the sequence listed to determine complete computer system reliability. However, each check is written so that it may be performed independently for maintenance convenience or other purposes.

(3) *Section IV. Monthly check procedures.* This section contains the steps to be followed when performing monthly checks. These steps must be performed in the sequence listed under the supervision of a qualified maintenance technician to determine complete computer system reliability. However, each check is written so that it may be performed independently for maintenance convenience or other purposes.

(4) *Section V. Nonperiodic check procedures.* This section contains checks that do not have to be performed at periodic intervals. These checks must be performed by a qualified maintenance technician upon initial emplacement of the equipment as prescribed in TM 9-XXXX-XXX-XX or when trouble is suspected in the part of the system to which they apply.

(5) *Section VI. Special check procedures.* This section contains checks which must be performed by a qualified maintenance technician upon initial emplacement as prescribed in TM 9-XXXX-XXX-XX or when a component is replaced. These checks will determine if the system is functioning correctly after the replacement.

c. All schematic references throughout this chapter refer to TM 9-XXXX-XXX-XX, unless otherwise indicated.

Figure 2. Example of descriptive material for check procedures (sheet 2 of 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

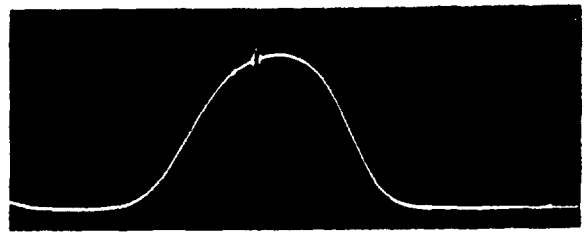
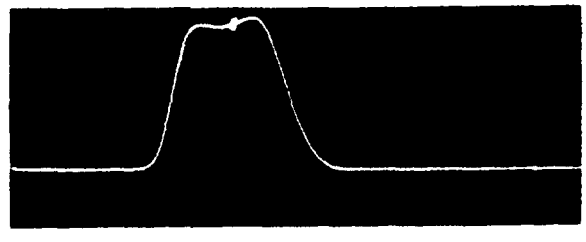
Table 0-00. AFC Loop No. 1 Alinement Checks

Step	Operation	Normal indication	Corrective procedure
1.	**Condition the equipment.** *a.* Energize the AJ1 HIPAR system through "low voltage" in accordance with the applicable operation and maintenance TM. *b.* On the moving target indicator group, set the RECYCLE switch (22S16) to OFF. *c.* Perform the checks prescribed in the table 0-00, steps 2 through 4. *NOTE.* Before performing the checks in steps 2 and 3, insure that the power has been applied to delay line 22DL1 for a minimum of 1.5 hours.		
2.	**Check the gated AFC 30-mc signal.** *a.* Using a 73-ohm RF cable, connect the EXT TRIG connector on the oscilloscope to PRE TRIGGER connector J42 on the moving target indicator group. *b.* On the 30-mc oscillator-amplifier, disconnect P1 (A1J4) from AFC OUT connector J4. *c.* Connect a T-connector having a 91-ohm termination to the CH1 connector on the oscilloscope. *d.* Using a 93-ohm RF cable, connect the T-connector to AFC OUT connector J4 on the 30-mc AFC oscillator-amplifier (A1).	**The gated 30-mc signal is between 25 and 35 usec in duration and has an 0.8 volt peak-to-peak amplitude.**	On the 30-mc oscillator-amplifier, adjust inductors (A1L4 and A1L5) for a maximum peak-to-peak amplitude; then adjust the GATED REF AMP resistor (A1R10) for an 0.8-volt peak-to-peak amplitude.

Figure 3. Sample check procedures table — Format 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

Table 0-00. Monthly Target Channel Alinement Checks — Continued

Step	Operation	Normal indication	Corrective procedure
6.	**Check the overall wide-band circuit alinement.** *a.* Perform the checks prescribed in table 0-00. *b.* On the receiver IF amplifier (A17) in the receiver group, connect the 75- to 90-ohm matching network to SIGNAL INPUT connector J2. *c.* On the IF distribution amplifier (A18), connect IF detector to OUT TO MAIN IF connector J3.	**The waveform, similar to that shown below, has a minimum band-width of 5 mc at the 3-db points.**  COMBINED BANDWIDTH RESPONSE	On the receiver IF amplifier, adjust the inductor (A17L2). On the IF distribution amplifier, adjust the inductor (A18L9). *Refer to figure 0-00.*
	d. Disconnect the IF detector from OUT TO MAIN IF connector J3 on the IF distribution amplifier (A18) and connect the IF detector to OUTPUT connector J3 on wide-band amplifier no. 2 (A21).	**The waveform, similar to that shown below, has a bandwidth of 4.0 to 5.0 mc at the 3-db points.**  COMBINED WIDE-BAND BANDWIDTH RESPONSE	

NOTE: Waveforms may be white on black or black on white. These waveforms are actual photographs of oscilloscope displays.

Figure 4. Example of illustration use in check procedures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-M-63043A(MI), Manuals, Technical: Missile System Equipment Check Procedures

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
US ARMY MISSILE COMMAND
ATTN: DRSMI-NP
REDSTONE ARSENAL, AL 35898

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:04Z
Check the source to verify that this is the current version before use.