MIL-A-16288/22
31 January 1974

MILITARY SPECIFICATION SHEET

ADAPTER, COMPRESSED GAS CYLINDER VALVE CONNECTIONS:

CLASS 580-000, NITROGEN

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the issue in effect of MIL-A-16288.

REQUIREMENTS:

1. The adapter shall be as specified in figure 1. Unless otherwise specified herein, dimensions are in inches, linear tolerances shall be plus or minus 1/64 inch, and angular tolerance shall be plus or minus 1/2 degree.

2. Permanently mark on surface in 1/8-inch-minimum characters: "580-000 N_2".

3. Maximum service pressure 3500 psi.

4. Valve connection: MIL-V-2/33 "Valve Cylinder, Gas: Nitrogen, Recoil Mechanisms, Outlet 000."

INTENDED USE: The adapter is intended to connect a No. 000 regulator or charging manifold to a No. 580 valve for nitrogen service.

Custodians:

Army - ME
Navy - YD
Air Force - 68

Preparing activity:

Army - ME

Project No. 8120-0266

Review activities:

Army - MD
Navy - SH, MS

User activities:

Army - AV
Navy - MC, AS

FSC 8120

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:33Z
Check the source to verify that this is the current version before use.

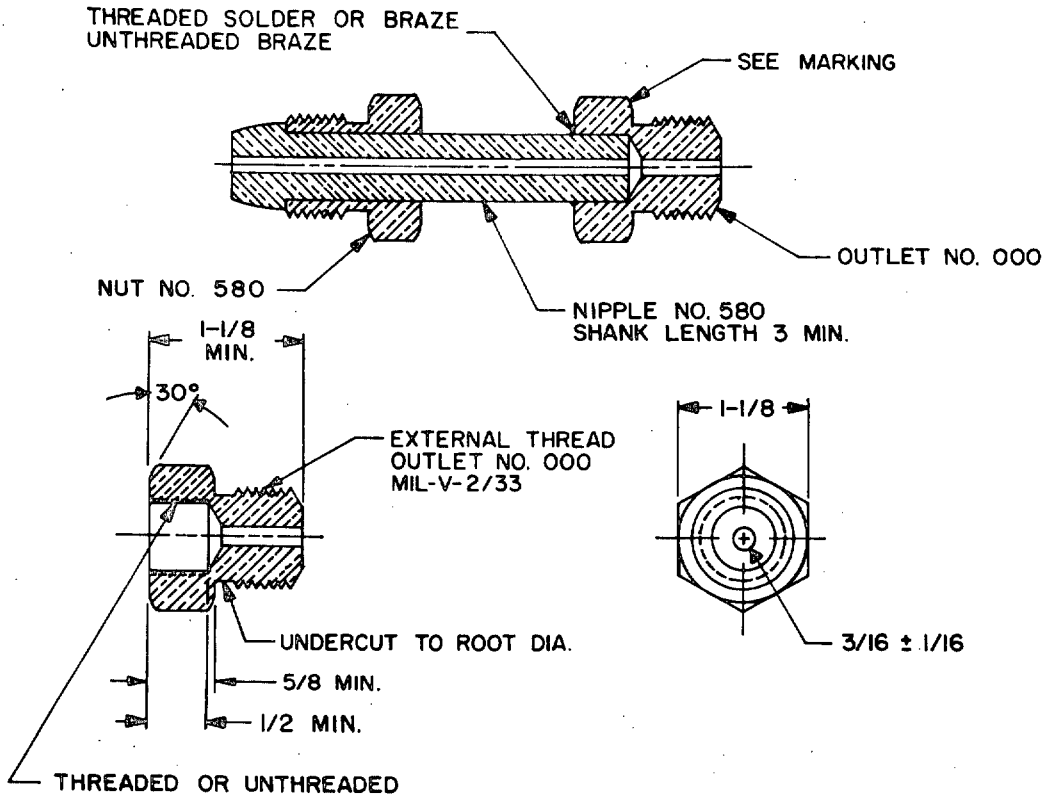


FIGURE 1. ADAPTER, NO. 000 REGULATOR TO NO. 580 VALVE, NITROGEN.

X-2398

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:33Z
Check the source to verify that this is the current version before use.