MILITARY SPECIFICATION SHEET

ADAPTER, COMPRESSED GAS CYLINDER VALVE CONNECTIONS:

CLASS 000-580, NITROGEN

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the issue in effect of MIL-A-16288.

REQUIREMENTS:

1. The adapter shall be as specified in figure 1. Unless otherwise specified herein, dimensions are in inches, linear tolerances shall be plus or minus 1/64 inch, and angular tolerance shall be plus or minus 1/2 degree.

2. Permanently mark on surface in 1/8-inch-minimum characters: "000-580-N_2".

3. Maximum service pressure 3500 psi.

4. Valve connection: MIL-V-2/33 "Valve, Cylinder, Gas: Nitrogen, Recoil Mechanisms, Outlet 000."

INTENDED USE: The adapter is intended to connect a No. 580 regulator or charging manifold to a No. 000 valve for nitrogen service.

Custodians:

Army - ME
Navy - YD
Air Force - 68

Preparing activity:

Army - ME

Project No. 8120-0362

Review activities:

Army - MD
Navy - SH, MS

User activities:

Army - AV
Navy - MC, AS

FSC 8120

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:34Z
Check the source to verify that this is the current version before use.

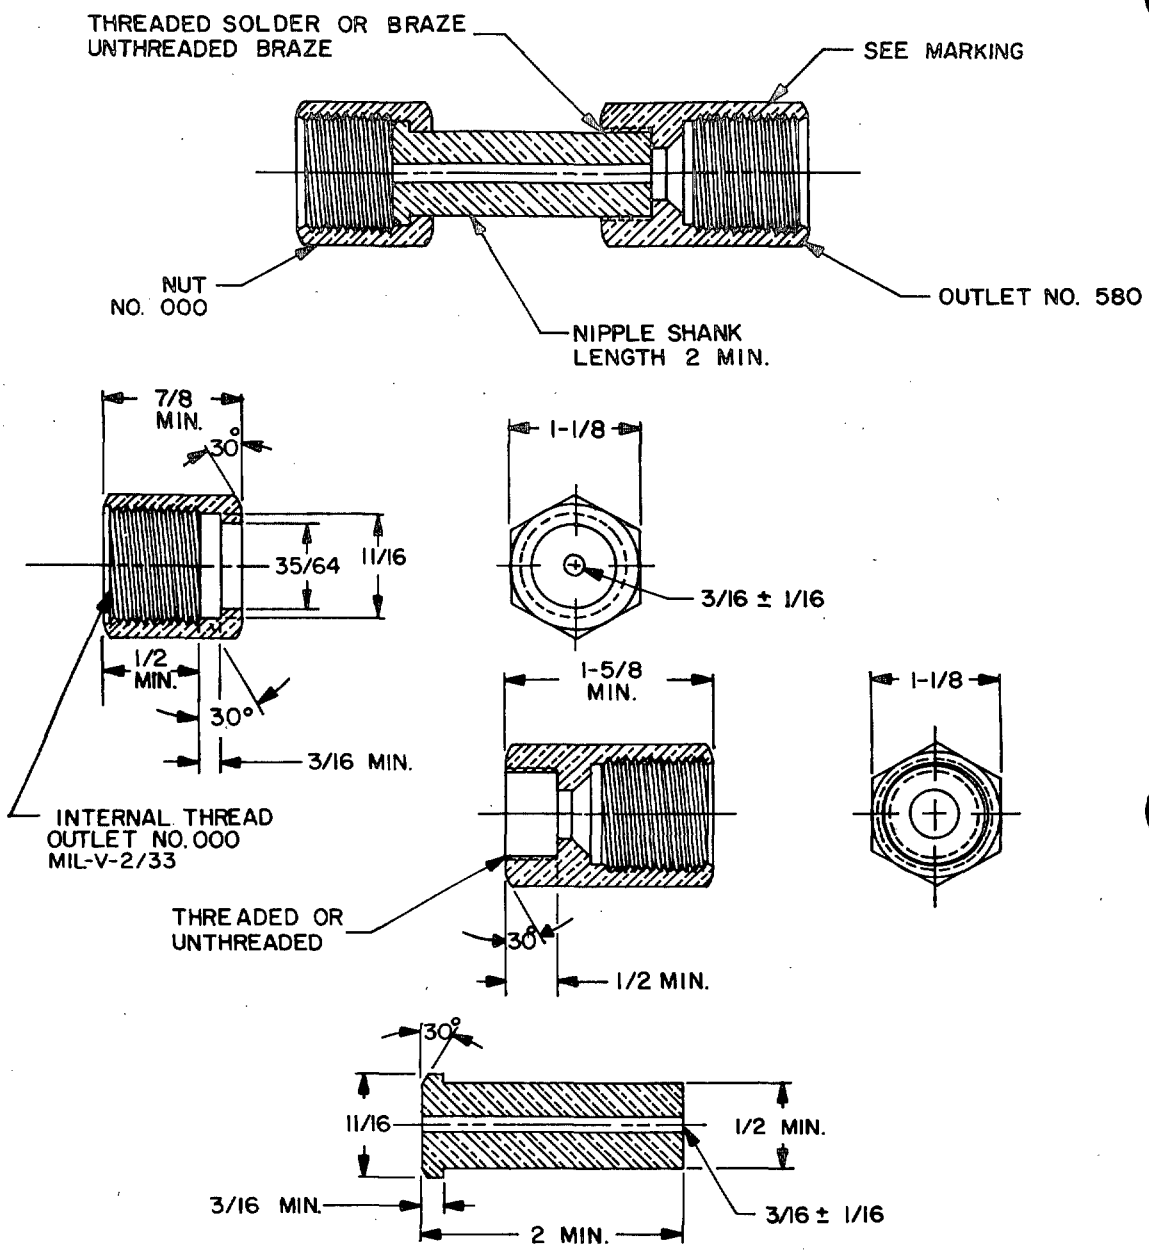


FIGURE 1. ADAPTER, NO. 580 REGULATOR TO NO. 000 VALVE, NITROGEN.

X-2399

Source: https://assist.dla.mil -- Downloaded: 20260-18T08:34Z
Check the source to verify that this is the current version before use.