MIL-C-16322A(I[illegible])
14 September 1964
SUPERSEDING
MIL-C-16322(BuMed)
May 15 1951

MILITARY SPECIFICATION

CUP, SOLUTION, CORROSION-RESISTING METAL, 7 OZ.

1. SCOPE

1.1 This specification covers a corrosion-resisting metal tumbler-shaped cup used for preoperative skin preparations and for use on ward treatment preparation trays.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper, (for Carton Sealing).

Military

MIL-L-10547 Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:36Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

Fed. Std. No. 66 Steel: Chemical Composition and Hardenability.
Fed. Test Method Std. No. 151 Metals; Test Methods.

Military

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. Material used in the fabrication of the tumbler shall be AISI 302 or 304 steel conforming to Fed. Std. No. 66, and shall meet the chemical composition requirements specified therein, when tested as specified in 4.4.1.

3.2 Construction. Construction shall conform in all details to the requirements specified herein, and to Figure 1. The edge of the cup shall be smooth and rounded, and shall have no hem, bead, or flange.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:36Z
Check the source to verify that this is the current version before use.

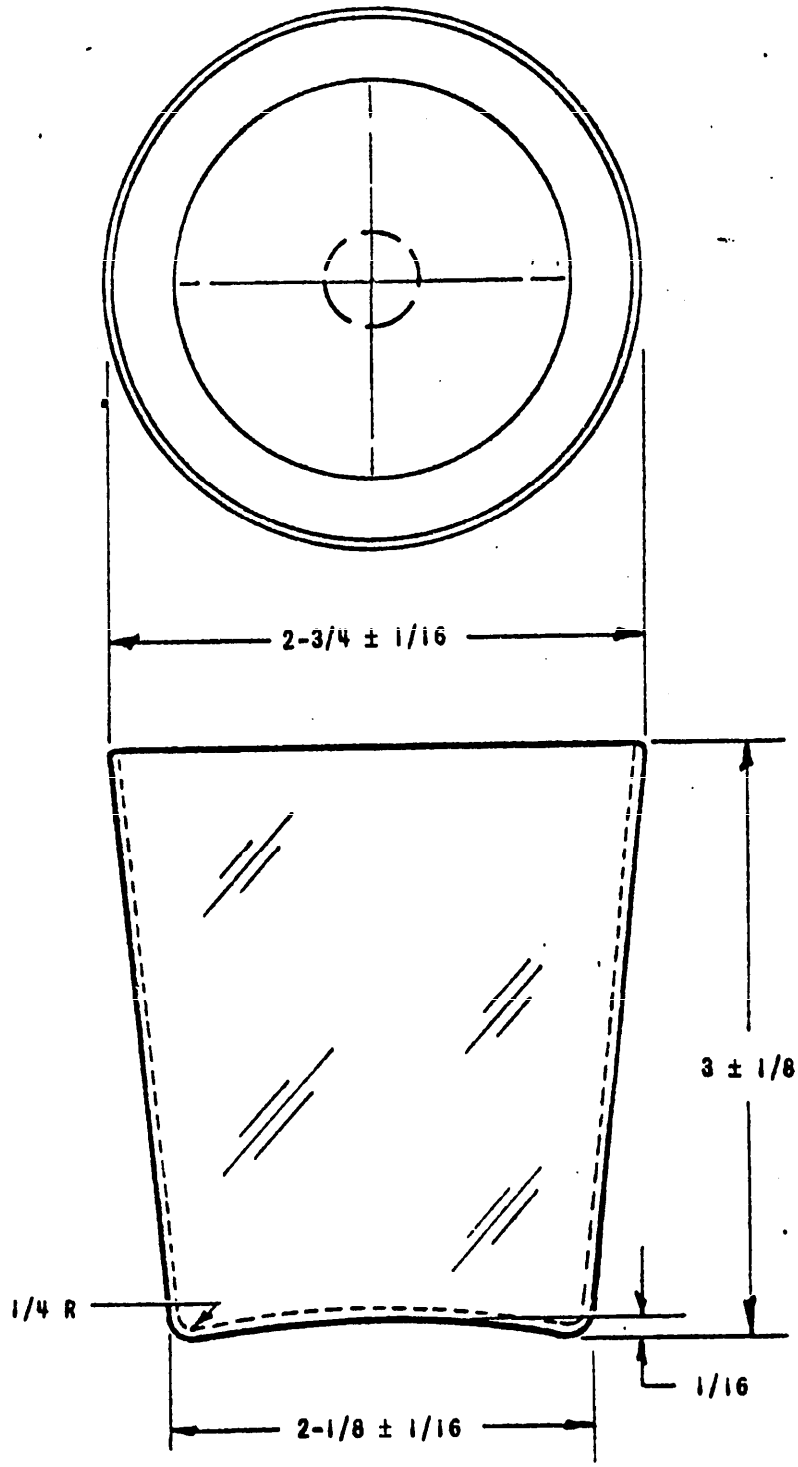


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:36Z
Check the source to verify that this is the current version before use.

3.2.1 Dimensions. The cup shall be seamlessly die-formed from a single piece of corrosion-resisting steel (see 3.1), 0.031 inch thick. In the finished cup, the thickness at any point shall not be reduced below 0.025 inch. Tolerances shall be as shown on Figure 1.

3.3 Capacity. Minimum capacity of cup shall be 7 ounces.

3.4 Finish.

3.4.1 Grinding. The entire inside and outside surfaces of cup shall be finished with a No. 4 finish after all surface imperfections have been removed by previous grinding. This last grinding shall produce a uniform finished surface with all imperfections and marks of previous grinds removed. As an alternate, the interior surfaces shall be given an electropolished finish. The thickness of the sheet forming the cup shall not be reduced below the thickness specified in 3.2.1 by grinding to remove the surface imperfections.

3.4.2 Cleaning. As a final operation, the cup shall be thoroughly cleaned to remove foreign particles such as dirt, grease, graphite, and metal.

3.5 Identification marking. Each cup shall be impressed on the bottom with the name or registered trademark of the manufacturer, and the letters U.S. All impressions shall be made at even pressure so as not to penetrate the inside surface of the cup.

3.6 Workmanship. Workmanship shall be first class throughout. Cups shall be free from defects which detract from their appearance or may impair their serviceability, and shall be free from rough grind marks, trimming marks, pits, scales, or other defects or imperfections. All surfaces shall have a smooth finish and shall be free from sharp edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:36Z
Check the source to verify that this is the current version before use.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, auditory, etc., investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 Certificates of quality. When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105.

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	1.0
Minor defects	II	4.0
For dimensional examination	S-1	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105.

4.3 Examination. The cups shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects:

Categories and defects*

Major

101 Cup components not free of cracks, tears, ripples, or identification marking penetration (extending to inside surface of cup bottom).
102 Edges of cup components not free of burs and sharpness.
103 Cup fails to bear evenly (without rocking) on a flat surface.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:36Z
Check the source to verify that this is the current version before use.

Minor

201 Finish not as specified or not free of scratches, coarse grind marks or mar marks.
202 Cup not free of chips, oil, grease, dirt, or other foreign matter.
203 Identification impressions omitted in whole or in part or not as specified.

* Examination shall not be restricted to the classified possible defects listed above.

4.3.2 Dimensional examination. The cups shall be examined for defects in dimensions. Any dimension not within the tolerance specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Chemical composition. Tests for chemical analysis shall be conducted in accordance with method 111.1 or 112.1 of Fed. Test Method Std. 151.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One (1) cup, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in table I shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table I. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	12 units	144 units

5.1.2.1 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:36Z
Check the source to verify that this is the current version before use.

5.1.3 Level A.

5.1.3.1 Unit package. Each unit shall be wrapped in tissue, kraft paper or other suitable material.

5.1.3.2 Intermediate package. Intermediate package shall be a carton of appropriate size in accordance with PPP-B-636. Closure shall be adequate to prevent spillage of contents under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose within the continental limits of the United States of America.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for type 2 load, and constructed in accordance with PPP-B-585, style 3, for class 3 use; PPP-B-601, table II, using type III, class 1 plywood; PPP-B-621, table III; or PPP-B-636, type CF, class weather-resistant.

5.2.1.2 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes.

5.2.1.3 Closure. Closure of wood boxes shall be in accordance with appendix of applicable box specification. Closure of each fiberboard box shall be as specified in the appendix of PPP-B-636. In addition, all seams, including manufacturer's joint, shall be closed by tape conforming to the requirements of PPP-T-76. The tape shall be not less than 2 inches wide. Three strips shall be applied to both top and bottom so that all seams and joints shall be covered their full length. Tape applied over the lengthwise seams shall extend a minimum of 2 inches onto each of the end panels. Tape applied over the end edge seams shall extend a minimum of 2 inches along the side and top, and side and bottom panels.

5.2.1.4 Strapping. Strapping, when required, shall be in accordance with appendix of applicable box specification.

NOTE: Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:36Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall conform to PPP-B-601, table I, using type III, class 1 plywood; or shall be designed for type 2 load, and constructed in accordance with PPP-B-585, style 3, for class 2 use; PPP-B-621, table I; or PPP-B-636, type CF, class domestic.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129. In addition, the letter "L" shall precede the Federal stock number. One space shall be allowed between the letter "L" and the first digit of the stock number. The terms "Stock number" or "FSN" shall not be indicated.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.
(b) Selection of applicable level of packing (see 5.1 and 5.2).

6.2 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Military requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:36Z
Check the source to verify that this is the currentversion before use.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:36Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:36Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

FORM APPROVED BUDGET BUREAU NO. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use of the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION MILITARY SPECIFICATION MIL-C-36283(DM), dated 14 September 1964, CENTRIFUGE, LABORATORY, SIZE 1, 110 VOLT, 60 CYCLE, AC

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

   ☐ YES ☐ NO IF "YES" IN WHAT WAY?

REMARKS (ATTACH ANY PERTINENT DATA WHICH MAY BE OF USE IN IMPROVING THIS SPECIFICATION. IF THERE ARE ADDITIONAL PAPERS, ATTACH TO FORM AND PLACE BOTH IN AN ENVELOPE ADDRESSED TO PREPARING ACTIVITY)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:36Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS/OFFERORS

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD.

Under

DEFENSE SUPPLY AGENCY
NSE MEDICAL SUPPLY CENTER
) AVENUE AND 29TH STREET
BROOKLYN, N.Y., 11232

OFFICIAL BUSINESS

POSTAGE FEES PAI
DEFENSE SUPPLY AGE

Defense Supply Agency
Defense Medical Supply Center
ATTN: Directorate of Technical Operations (Code T-M5)
3rd Avenue and 29th Street
Brooklyn, N.Y., 11232

Source: https://assist.dla.mil -- Downloaded: 20260-18T08:36Z
Check the source to verify that this is the current version before use.