MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM, (POLARIZED, ETCHED FOIL), 85°C (VOLTAGE DERATED TO 125°C), STYLE CL53

This amendment forms a part of Military Specification MIL-C-3965/11H, dated 15 April 1975, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, delete and substitute:

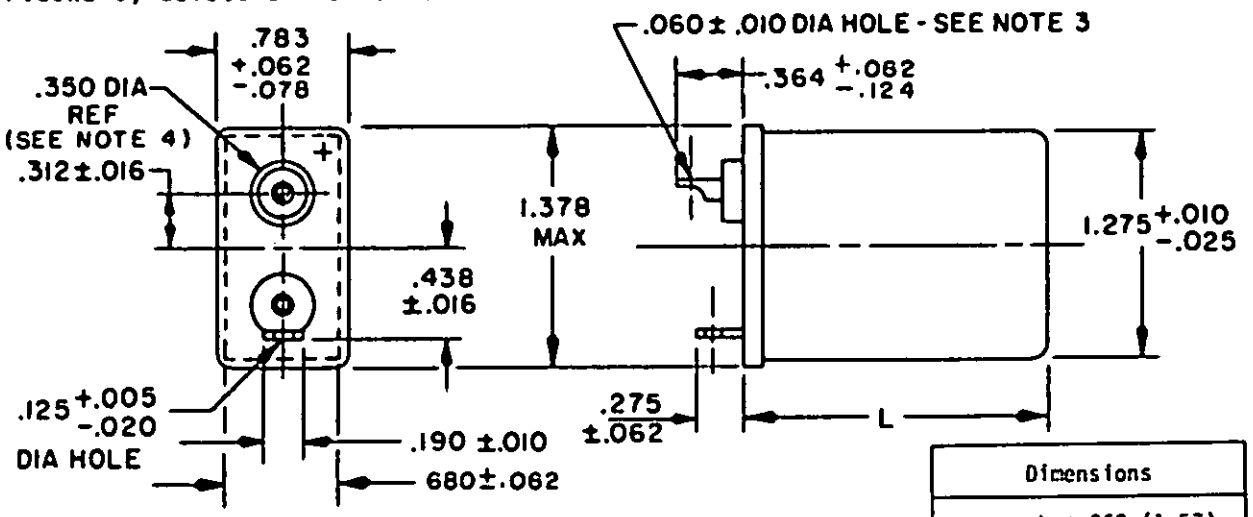

TYPE D CASE

Dimensions	
	L ±.062 (1.57)
D1	1.375 (34.93)
D2	2.000 (50.80)
D3	2.500 (63.50)

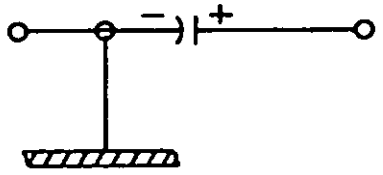

CASE

CIRCUIT DIAGRAM

INCHES	MM	INCHES	MM
.005	0.13	.190	4.83
.010	0.25	.275	6.99
.016	0.41	.312	7.92
.020	0.51	.350	8.89
.025	0.64	.364	9.25
.060	1.52	.438	11.13
.062	1.57	.680	17.27
.070	1.78	.783	19.89
.078	1.98	1.275	32.39
.124	3.15	1.378	35.00
.125	3.18		

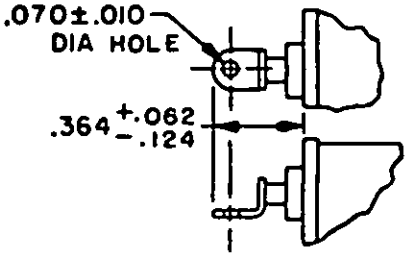

OPTIONAL ALTERNATE TERMINAL CONSTRUCTION

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5910-1515-3)

FSC 5910

Source: https://assist.dla.mil - Downloaded: 2026-10-17T03:00Z
Check the source to verify that this is the current version before use.