INCH-POUND

MIL-DTL-3962/7
w/ AMENDMENT 1
13 March 2020
MIL-DTL-3962/7
20 August 2015

DETAIL SPECIFICATION SHEET


ANCHORS, GROUND, ARROWHEAD, DRIVING EQUIPMENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3962.

Requirements

Holding handle shall be formed as specified on figure 1 and wire material in accordance with ASTM A853, or ASTM A818, or ASTM A641/A641M, ASTM A809.

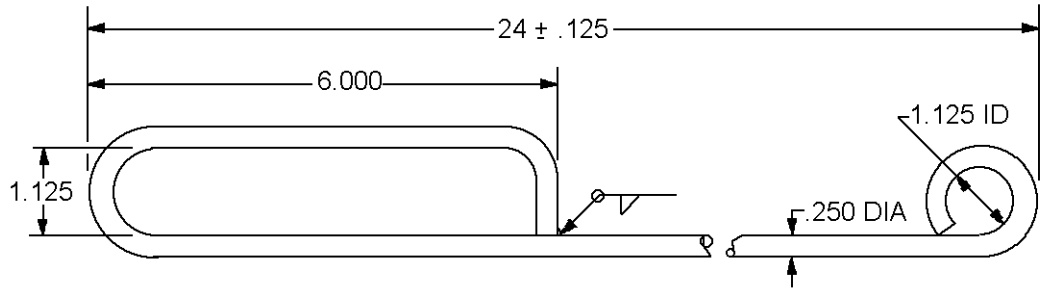


| inch | mm |
|---|---|
| .125 | 3.18 |
| .250 | 6.35 |
| 1.125 | 28.58 |
| 6.000 | 152.40 |
| 24.000 | 609.60 |

Notes:
1. Dimensions are in inches
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.125 (3.18 mm).
4. Break sharp edges .and remove all hanging burrs and slivers.


FIGURE 1. Holding handle for 4, 6 and 8 inch anchor.

AMSC N/A

FSC 4030

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:59Z
Check the source to verify that this is the current version before use.

Driving head shall for 4 inch anchors shall be as specified on figure 2 and material as specified in ASTM A322, hot rolled steel 4140-4150.

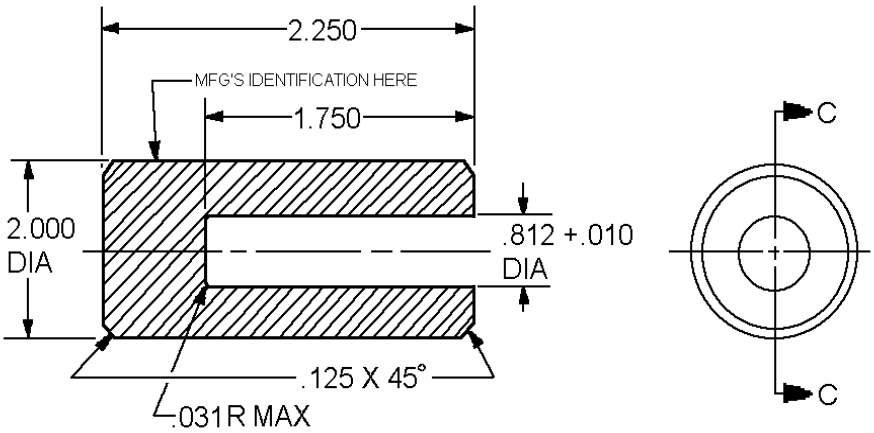


SECTION C-C

| inch | mm |
|---|---|
| .010 | 0.25 |
| .031 | 0.79 |
| .125 | 3.18 |
| .812 | 20.62 |
| 1.750 | 44.45 |
| 2.000 | 50.80 |
| 2.250 | 57.15 |


Notes:
1. Dimensions are in inches
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.015(0.38 mm).
4. Break sharp edges .and remove all hanging burrs and slivers.
5. Driving head shall be heat treated after fabrication to Rockwell 40-45 HRC.

FIGURE 2. Driving head for 4 inch anchor.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:59Z
Check the source to verify that this is the current version before use.

Driving head for 6 inch and 8 inch anchor shall be as specified on figure 3 and material in accordance with ASTM A322, hot rolled steel 4140-4150.

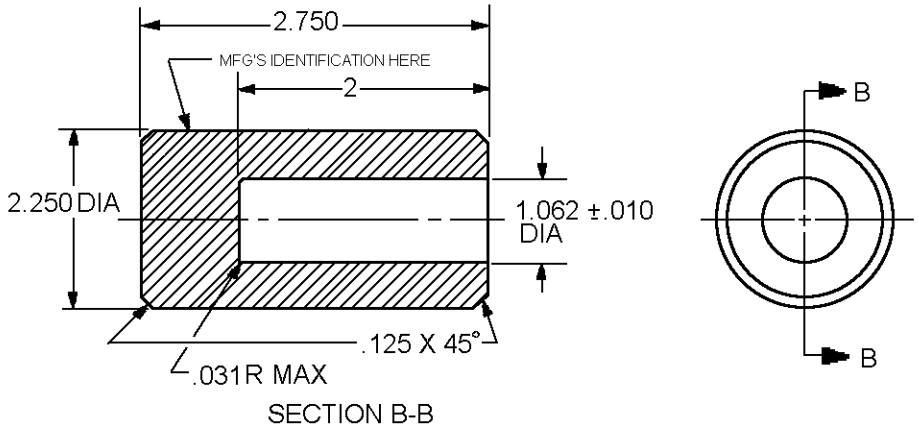


| Inch | mm |
|---|---|
| .010 | 0.25 |
| .031 | 0.79 |
| .125 | 3.18 |
| 1.062 | 26.97 |
| 2.000 | 50.80 |
| 2.250 | 57.15 |
| 2.750 | 69.85 |


Notes:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.015 (0.38 mm).
4. Break sharp edges .and remove all hanging burrs and slivers.
5. Driving head shall be heat treated after fabrication to Rockwell 40-45 HRC.

FIGURE 3. Driving head for 6 inch and 8 inch anchor.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:59Z
Check the source to verify that this is the current version before use.

Driving rod for 4 inch anchor shall be as specified on figure 4 and material in accordance with ASTM A322, hot rolled steel 4140-4150.

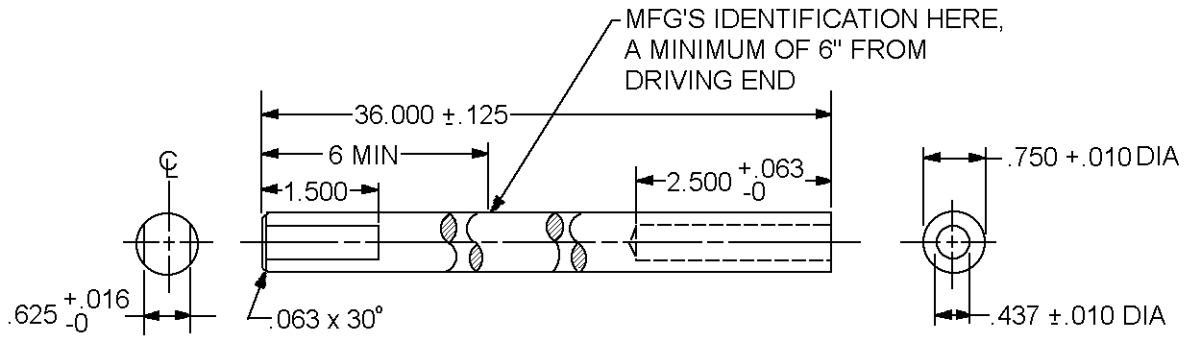


| Inch | mm |
|---|---|
| .010 | 0.025 |
| .016 | 0.41 |
| .063 | 1.60 |
| .125 | 3.18 |
| .437 | 11.10 |
| .625 | 15.88 |
| .750 | 19.05 |
| 1.500 | 38.10 |
| 2.500 | 63.50 |
| 36.000 | 914.40 |


Notes:
1. Dimensions are in inches
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.015 inches (0.38 mm).
4. Break sharp edges .and remove all hanging burrs and slivers.
5. Driving rod and driving head shall be heat treated after fabrication to Rockwell 40-45 HRC.

FIGURE 4. Driving rod .750 inch diameter for 4 inch anchor.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:59Z
Check the source to verify that this is the current version before use.

Driving head for 6 inch and 8 inch anchor shall be as specified on figure 5 and material in accordance with ASTM A322, hot rolled steel 4140-4150.

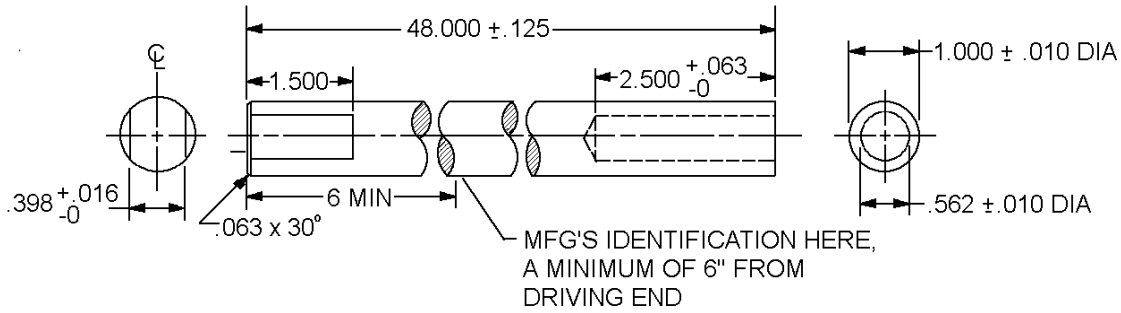


| Inch | mm |
|---|---|
| .010 | 0.025 |
| .016 | 0.41 |
| .063 | 1.60 |
| .125 | 3.18 |
| .398 | 10.11 |
| .562 | 14.27 |
| 1.000 | 25.40 |
| 1.500 | 38.10 |
| 2.500 | 63.50 |
| 48.00 | 1219.20 |

Notes:
1. Dimensions are in inches
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.015 inches (0.38 mm).
4. Break sharp edges .and remove all hanging burrs and slivers.
5. Driving rod shall be heat treated after fabricated to Rockwell 40-45 HRC.

FIGURE 5. Driving rod 1.00 inch diameter for 6 inch and 8 inch anchor.

Designators for holding handle, drive head, and drive rod, see table I.

TABLE I. Designators for holding handle, drive head, and drive rod.

| Dash designator | Accessory |
|---|---|
| -A | Holding handle for 4, 6, and 8 inch anchor, see figure 1 |
| | |
| -A4 | 4 inch anchor holding handle, driving head, and driving rod |
| -A6 | 6 or 8 inch anchor holding handle, driving head, and driving rod |
| | |
| -B | Driving head for 4 inch anchor, see figure 2 |
| -C | Driving head for 6 and 8 inch anchor, see figure 3 |
| | |
| -D | Driving rod for 4 inch anchor, see figure 4 |
| -E | Driving rod for 6 and 8 inch anchor, see figure 5 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:59Z
Check the source to verify that this is the current version before use.

Finish (not applicable to zinc coated parts):

Driving rod, head, and handle shall be coated with primer in accordance with MIL-DTL-53022 Type I, II, III, or IV, or MIL-DTL-53030.

Driving rod, head, and handle shall be coated with aluminum pigmented enamel or enamel, alkyd, conforming to MIL-DTL-53039, color designator, see table II.


Holes in driving rods and driving heads shall be free of excess paint to ensure proper fit.

TABLE II. Color codes from SAE-AMS-STD-595. 1/

| Color designator | Color |
|---|---|
| Blank | None |
| 34079 | Forest green in accordance with SAE-AMS-STD-595 |
| 33303 | Sand in accordance with SAE-AMS-STD-595 |
| 33531 | Tan in accordance with SAE-AMS-STD-595 |
| 38905 | Weapons safety red |

1/ See MIL-DTL-53039 for other coating colors.

PIN: The PIN consists of the prefix letter “M” the specification sheet number, and a dash number for holding handle, driving head, or driving rod.

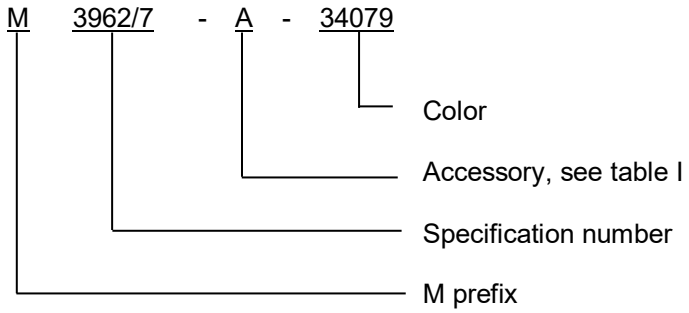


PIN examples:
M3962/7-A-34079 indicates a holding handle for 4, 6, and 8 inch anchor, forest green.
M3962/7-C-33531 indicates a driving head for 6 inch and 8 inch anchor, tan.
M3962/7-A6-33531 indicates a 6 or 8 inch anchor holding handle, driving head and driving rod, tan.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Legacy. This slash sheet is a replacement for drawing 4-1-199, referenced in MIL-A-3962, dated 19 May 1986. Color designator 34079 is the original color of the accessories, see table III for supersession listing.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:59Z
Check the source to verify that this is the current version before use.

TABLE III. Supersession data.

| Description | New PIN | Superseded PIN |
|---|---|---|
| Holding handle for 4, 6, and 8 inch anchor, forest green | M3962/7-A-34079 | MIL-A-3962 SZ4,6, OR 8IN |
| | | 4-1-199 |
| Driving head for 6 inch and 8 inch anchor, forest green | M3962/7-C-34079 | MIL-A-3962 |
| Driving head for 4 inch anchor, forest green | M3962/7-B-34079 | 4-1-199 |
| Driving rod .750 inch diameter for 4 inch anchor | M3962/7-D-34079 | 4-1-199 |

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-3962, this document references the following

MIL-DTL-53030
MIL-DTL-53039
SAE-AMS-STD-595
SAE-AMS-STD-595/33303
SAE-AMS-STD-595/33531
SAE-AMS-STD-595/34079
SAE-AMS-STD-595/38905
ASTM A153/A153M
ASTM A322
ASTM A641/A641M
ASTM A809
ASTM A818
ASTM A853

CONCLUDING MATERIAL

Custodians:
Army - GL
Navy - YD
Air Force - 71
DLA - CC

Preparing Activity:
DLA - CC

(Project 4030-2020-007)

Review Activities:
Army - EA, MD
Navy - SA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:59Z
Check the source to verify that this is the current version before use.