
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM, (POLARIZED, SINTERED SLUG) - 85°C (VOLTAGE DERATED TO 125°C), STYLES CL14 AND CL16


INACTIVE FOR NEW EQUIPMENT DESIGN AFTER DATE OF THIS SPECIFICATION; USE MIL-C-39006/19

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-3965.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

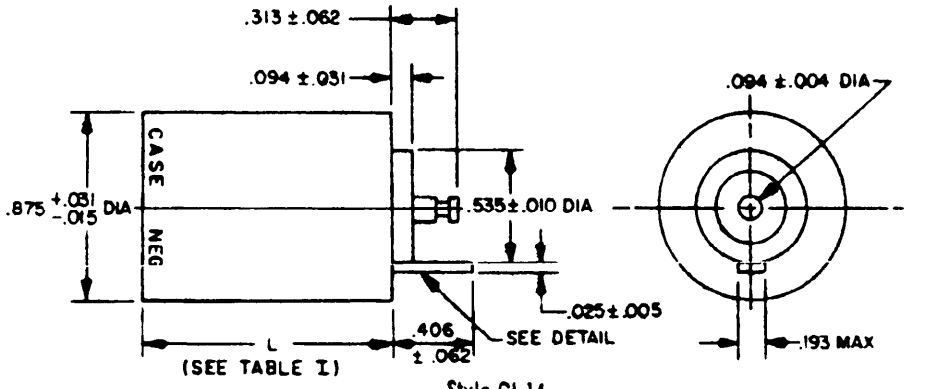

Style CL14

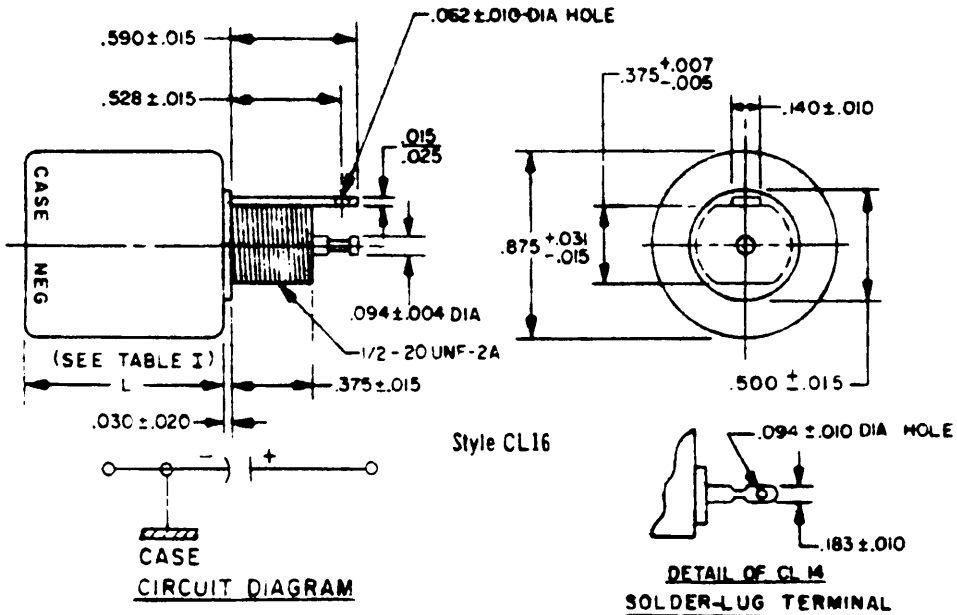

Style CL16

DETAIL OF CL 16
SOLDER-LUG TERMINAL

INCHES	MM
.004	.10
.005	.13
.007	.18
.010	.25
.015	.38
.020	.51
.025	.64
.030	.76
.031	.79
.062	1.57
.094	2.39
.140	3.56
.183	4.65
.193	4.90
.313	7.95
.375	9.53
.406	10.31
.500	12.70
.528	13.41
.535	13.59
.590	14.99
.875	22.23

NOTES:
1. All dimensions in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Styles CL14 and CL16 capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:59Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Type designation 1/	Voltage			Capacitance	DC leakage (max)			Dissipation factor (max)	Impedance (max)	Dimension L ±.062 (1.57)
	Rated (85° C)	Derated (125° C)	Surge (85° C)		25° C	85° C	125° C			
	volts, dc	volts, dc	volts, dc	µF	µA	µA	µA	percent	ohms	inches
CL1-BF101UPG	20	18	23	100.0	10	50	80	21.0	30	0.540 (13.72)
CL1-BF201UPG	20	18	23	200.0	16	80	128	36.0	20	0.732 (18.59)
CL1-BH750UPG	30	26	34.5	75.0	11	55	88	15.0	45	0.540 (13.72)
CL1-BH151UPG	30	26	34.5	150.0	13	90	104	29.0	30	0.732 (18.59)
CL1-BK400UPG	60	52	69	40.0	12	60	96	8.2	65	0.540 (13.72)
CL1-BK800UPG	60	52	69	80.0	19	95	152	16.0	35	0.732 (18.59)
CL1-BM250UPG	90	78	103	25.0	11	55	88	5.1	90	0.540 (13.72)
CL1-BM500UPG	90	78	103	50.0	18	90	144	10.0	45	0.732 (18.59)
CL1-BR120UPG	180	155	207	12.0	11	55	88	5.1	180	0.920 (23.37)
CL1-BR250UPG	180	155	207	25.0	18	90	144	10.0	90	1.300 (33.02)
CL1-BS080UPG	270	235	310	8.0	11	55	88	5.1	270	1.270 (32.36)
CL1-BS160UPG	270	235	310	16.0	18	90	144	10.0	135	1.865 (47.37)
CL1-BT060UPG	360	310	414	6.0	11	55	88	5.0	360	1.635 (41.53)
CL1-BT120UPG	360	310	414	12.0	18	90	144	10.0	180	2.420 (61.47)
CL1-BU050UPG	450	390	518	5.0	11	55	88	4.9	450	2.000 (50.80)
CL1-BU100UPG	450	390	518	10.0	18	90	144	9.8	225	2.980 (75.69)
CL1-BV040UPG	540	470	621	4.0	11	55	88	5.1	540	2.365 (60.07)
CL1-BV080UPG	540	470	621	8.0	18	90	144	10.0	270	3.532 (89.71)
CL1-BW3R5UPG	630	545	724	3.5	11	55	88	5.0	630	2.720 (69.09)
CL1-BW070UPG	630	545	724	7.0	18	90	144	10.0	315	4.062 (103.17)

1/ Complete type designation will include an additional symbol to indicate style.

Source: https://assist.dla.mil -- Downloaded: 20260-17T02:59Z
Check the source to verify that this is the current version before use.

TABLE II. Cross-reference data.

FROM	TO
Type designation 1/	Part number 2/
MIL-C-3965/1H	MIL-C-39006/19
	M39006/19-
CL1-BF101UPG	1000
CL1-BF201UPG	1001
CL1-BH750UPG	1002
CL1-BH151UPG	1003
CL1-BK100UPG	1004
CL1-BK200UPG	1005
CL1-BM250UPG	1006
CL1-BM500UPG	1007
CL1-BR120UPG	1008
CL1-BR250UPG	1009
CL1-BS060UPG	1010
CL1-BS160UPG	1011
CL1-BT060UPG	1012
CL1-BT120UPG	1013
CL1-BU050UPG	1014
CL1-BU100UPG	1015
CL1-BV040UPG	1016
CL1-BV080UPG	1017
CL1-BW325UPG	1018
CL1-BW670UPG	1019

1/ Complete type designation will include an additional symbol to indicate style.

2/ Part number referenced will replace styles CL14 and CL16.

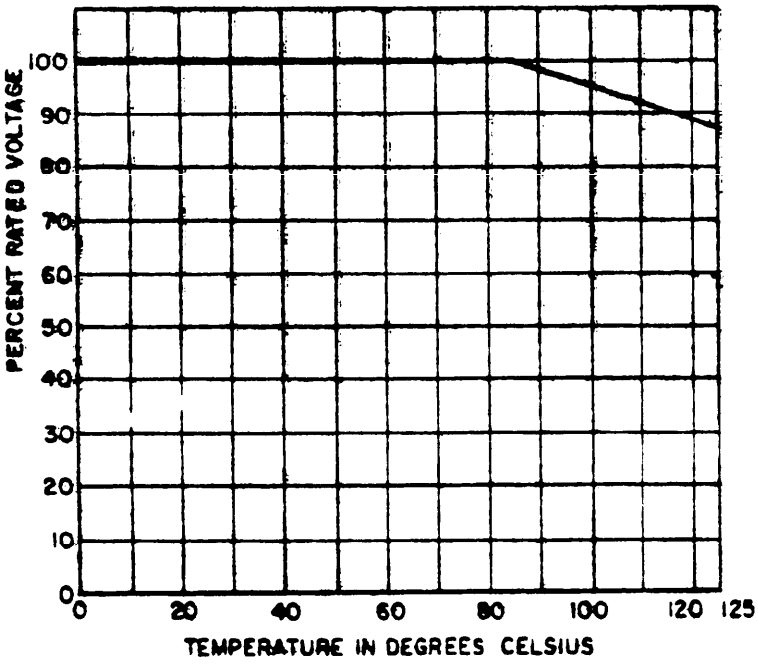


FIGURE 2. Voltage derating with temperature.

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T02:59Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration - See figure 1.
Case type - Tubular, uninsulated.
Seal type - Hermetic (symbol G).
Terminals - Solder-lug.
Rated temperature - -55° C to +85° C, voltage derated to +125° C (see figure 2).
Rated voltage - See table I.
Capacitance (cap) (nom) - See table I.
Capacitance tolerance - Symbol U (+75, -15%).

DC leakage (DCL) (max) (at +25° C):
See table I.

Dissipation factor (DF) (max):
See table I.

Seal: In accordance with MIL-C-3965.

Dielectric withstanding voltage (DWV):
Sleeving to case (min) - Not applicable.
Terminal to case - Not applicable.

Insulation resistance:
Sleeving to case (min): Not applicable.
Terminal to case - Not applicable.

Temperature cycling:
DCL (max) - 125% of 25° C value of table I
ΔCap - Within ±5% of initial measurement.
DF (max) - 115% of table I value.

Solderability: Not applicable.

Terminal strength:
Pull test - In accordance with MIL-C-3965.
Bend test (if req.) - In accordance with MIL-C-3965.
Torque test (CL16 only) - In accordance with MIL-C-3965.
Wire-lead bend test - Not applicable.
Twist test - Not applicable.

Surge voltage: See table I.

Moisture resistance:
DCL (max) - 125% of 25° C value of table I
ΔCap - Within ±8% of initial measurement.
DF (max) - 115% of table I value.

Low temperature (storage):
DCL (max) - See table I (25° C).
ΔCap - Within ±5% of initial measurement.
DF (max) - See table I.

Stability at low and high temperature:
Step 1 (+25° C):
DCL (max) - See table I.
Cap - Within tolerance of table I value.
DF (max) - See table I.
Step 2 (-55° C):
Impedance - See table I.
ΔCap (max) - -60% (20 v), -45% (30 v), or -35% (>30 v) of step 1 value.
Step 3 (+25° C):
DCL (max) - See table I.
ΔCap - Within ±5% of step 1 value.
DF (max) - See table I.
Step 4 (+85° C):
DCL (max) - See table I.
ΔCap (max) - +15% (≥ 30 v) or +10% (>30 v) of step 1 value.
DF (max) - See table I.
1/ Step 5 (+125° C):
DCL (max) - See table I.
ΔCap (max) - +20% (≥26 v) or +10% (>26 v) of step 1 value.
DF (max) - See table I.
Step 6 (+25° C):
DCL (max) - See table I.
ΔCap - Within ±5% of initial measurement.
DF (max) - See table I.

Reverse voltage: Not applicable.

Life at +85° C:
2,000-hr (qualification):
DCL (max) - See table I (25° C).
ΔCap - Within ±15% of initial measurement.
DF (max) - See table I.
240-hr (group B):
DCL (max) - See table I (25° C).
ΔCap - Within ±10% of initial measurement.
DF (max) - See table I.
1,760-hr (group C):
DCL (max) - See table I (25° C).
ΔCap - Within ±15% of initial measurement.
DF (max) - See table I.

Barometric pressure: Rated voltage for 20 to 450 v units; 500 vdc for 540 and 630 v units.

Life at -125° C:
DCL (max) - See table I (25° C).
ΔCap - Wtihin ±15% of initial measurement.
DF (max) - 130% of initial requirement.
DWV and IR - Not applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-17T02:59Z
Check the source to verify that this is the current version before use.

Marking: Capacitors shall be marked as shown in the following example:

Example:
CL14BF101UPG - Type designation.
12345 7015 - Source and date code.
100 μF 20 vdc - Capacitance and rated voltage (at 85° C).

Polarity - Capacitors shall be marked "CASE NEG" on the negative end (see figure 1).

Voltage groups (85° C rated voltage):
I - - - - - - - - - - - - 20 to 90 v, incl.
II - - - - - - - - - - - - 180 to 360 v, incl.
III - - - - - - - - - - - - 450 to 630 v, incl.

NOTE: The capacitors covered by this specification sheet are substitutable for those formerly covered by MIL-C-3965/1G. See table II.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - EL, MU
Navy - EC, SH
Air Force - 11, 17, 80
DSA - ES

User activities:
Army -
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Air Force - 80

Agent:
DSA - ES

(Project 5910-1001-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:59Z
Check the source to verify that this is the current version before use.