MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, WAVEGUIDE, CLASS II, (FREQUENCY RANGE 8.2 TO 12.4 GIGAHERTZ)

This specification is approved for use by Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dummy loads described herein shall consist of this document and the latest issue of Specification MIL-D-3954.


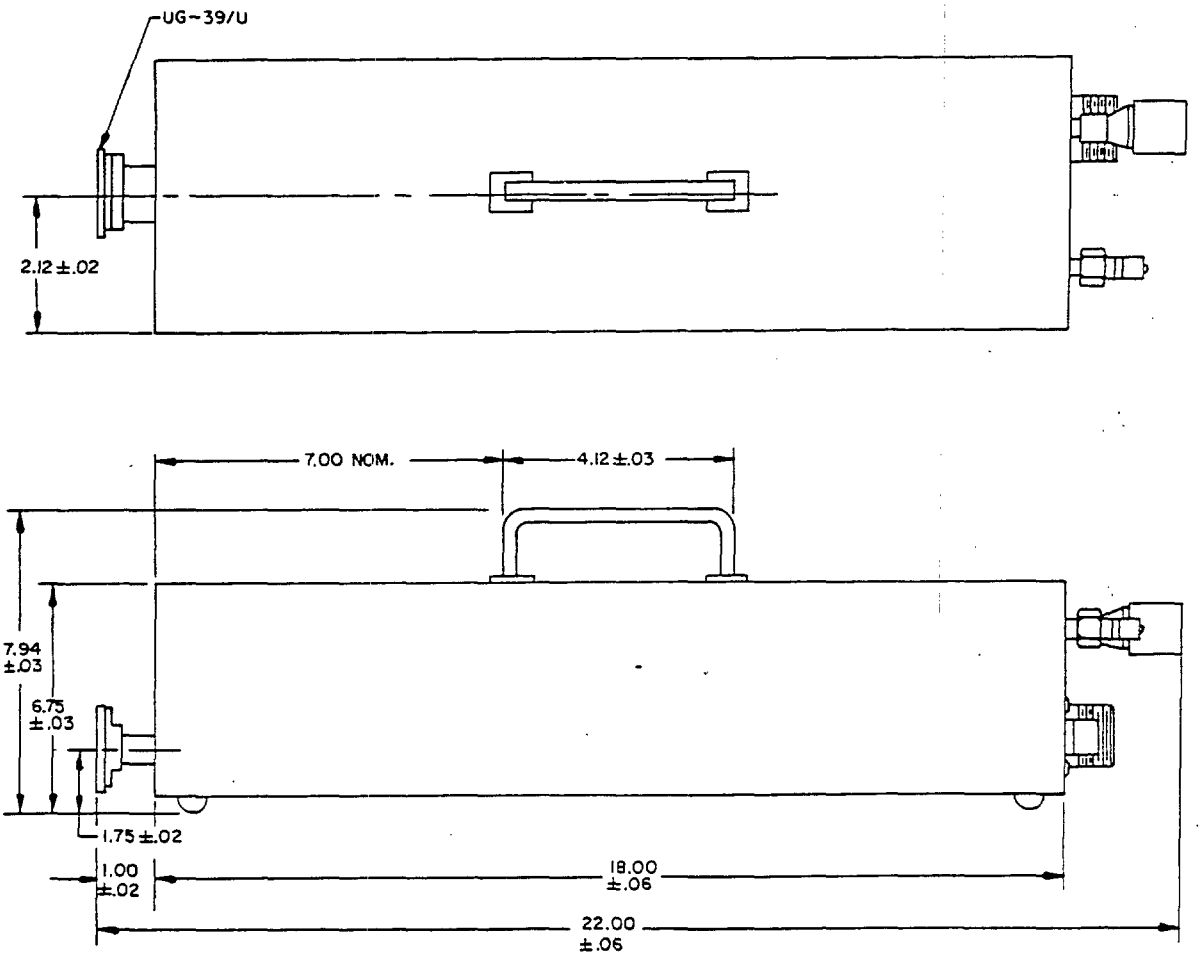



FIGURE 1. Outline for P/N's M3954/22-001, 002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:56Z
Check the source to verify that this is the current version before use.

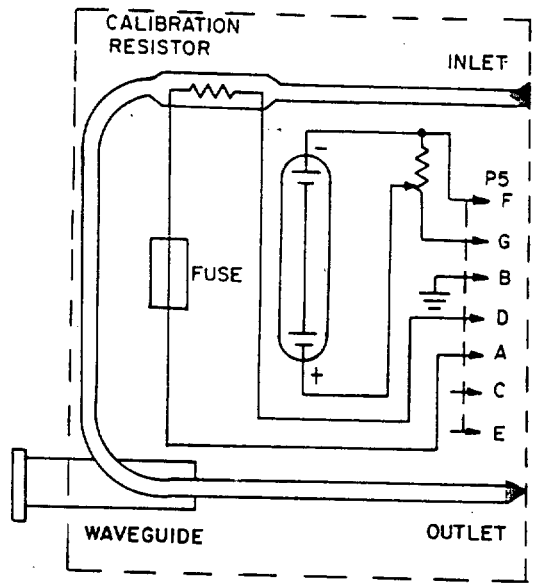

DUMMY LOAD
SCHEMATIC-FLOW DIAGRAM
SEE NOTES 3 & 4

INCHES	MM	INCHES	MM
.02	.51	4.12	104.65
.03	.76	4.25	107.95
.06	1.52	6.75	171.45
1.00	25.40	7.00	177.80
1.75	44.45	7.94	201.68
2.12	53.85	18.00	457.20
		22.00	558.80

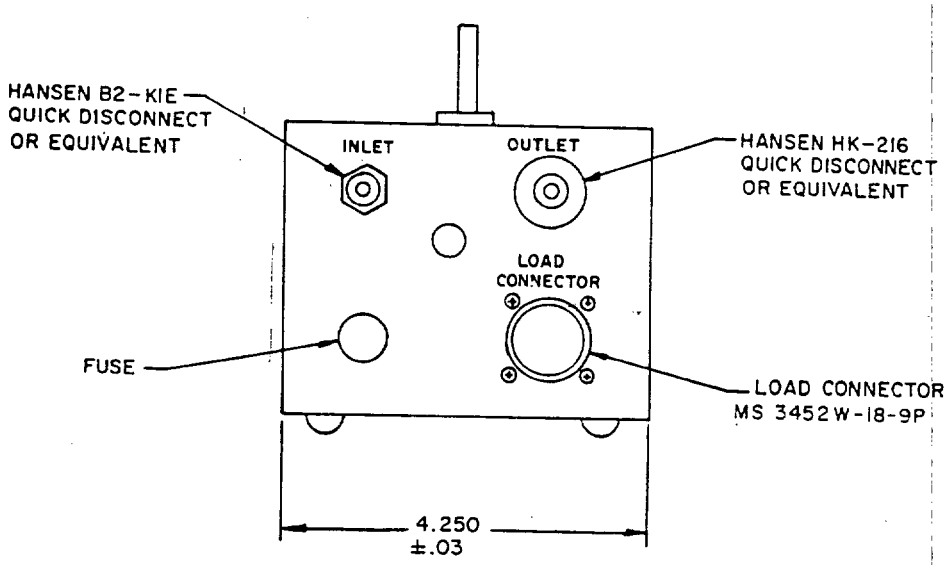

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. P/N M3954/22-001 does not contain the thermopile, calibration resistor, fuse or related components.
4. P/N M3954/22-002 contains wire wound resistor, fuse and thermopile.

FIGURE 1. Outline for P/N's M3954/22-001, 002 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Input power:
Average: 2 kW maximum average continuous.

VSWR: 1:15:1 (maximum when filled with water).

Coolant: Steam distilled or deionized water.
Flow rate: 0.2 GPM per 1,000 watts maximum.
Pressure drop: 4 PSI at the rate of 0.5 GPM.
Input temperature: 35°C maximum.

Material:
Waveguide: Brass per M85/1-079.
Body: Aluminum, gray baked enamel.

Weight: 3 lbs approximately.

Part number: M3954/22-001 (see figure 1, note 1).
M3954/22-002 (see figure 1, note 2).

FIRST ARTICLE INSPECTION: First article inspection shall be used in lieu of qualification, per table II of MIL-D-3954. Samples shall be in accordance with the appendix to MIL-D-3954.

NOTE: The dummy loads covered by this specification are substitutable for the following commercial types:

P/N M3954/22-	Mfr code	Type number
001	91161	WL-90
002	91161	WLT-90

Review activities:
Navy - SH, OS, AS
DSA - ES

User activity:
Navy - MC

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-N448)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:56Z
Check the source to verify that this is the current version before use.