NOT MEASUREMENT SENSITIVE

MIL-I-11132/30C
17 January 1995
SUPERSEDING
MIL-I-11132/30B
30 June 1987

MILITARY SPECIFICATION SHEET

INSIGNIA, GRADE, COMMAND SERGEANT MAJOR, SENIOR DIVISION, ROTC, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-11132.

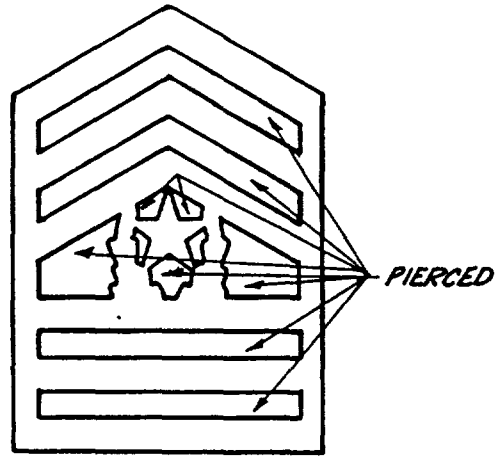

MATERIAL:
-1: Red Brass
-2: Red Brass or Zinc Aluminum

DASH NO.
-1: Regular
-2: Subdued

FINISH:
-1: Mirror-like Polished and shall match TIOH Metal Finish Chip Number 1.
-2: Dull, Flat Black Enamel.

DIMENSIONS:
HEIGHT (Overall): 1-5/32 inches (2.94 cm) (REF)
WIDTH (Overall): 13/16 inch (2.06 cm) (REF)
THICKNESS: 0.060 inch ± 0.005 inch (0.152 cm ± 0.12 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:17Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The dull flat black enamel for Dash No. -2 shall match FED-STD-595, Chip No. 37038.

3. Piercing shall be as indicated.

4. Attaching device shall be prong and clutch type. Prongs shall be located on a horizontal line 9/16 inch ± 1/32 inch (1.43 cm ± 0.08 cm) above the bottom of the insignia equidistant from each side and 11/16 inch ± 1/64 inch (1.75 cm ± 0.04 cm) apart.

5. Prongs shall be fused to the reverse of the insignia.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0791)

Source: https://assist.dla.mil - Downloaded: 2026-10-17T15:17Z
Check the source to verify that this is the current version before use.