MILITARY SPECIFICATION SHEET

INSIGNIA, GRADE; SERGEANT, SENIOR DIVISION, ROTC, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-I-11132.

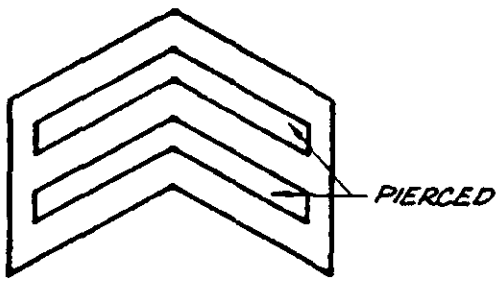

DASH NOS.
-1: REGULAR
-2: SUBDUED

MATERIAL:
RED BRASS OR ZINC ALUMINUM
(SUBDUED ONLY)
DIMENSIONS (INCHES):
HEIGHT (OVERALL): 45/64 (REF)
WIDTH (OVERALL): 13/16 (REF)
THICKNESS: .060 ± .005

FINISH:
-1: MIRROR-LIKE POLISHED
-2: DULL, FLAT BLACK ENAMEL

NOTES:

1. THE ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. THE PRONGS SHALL BE LOCATED ON A HORIZONTAL LINE 9/32 ± 1/32 INCH ABOVE THE BOTTOM OF THE INSIGNIA EQUIDISTANT FROM EACH SIDE AND 11/16 ± 1/64 INCH ON CENTERS.
2. PRONGS SHALL BE FUSED TO THE REVERSE OF THE INSIGNIA.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455 - 0227)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

☆ U.S. GOVERNMENT PRINTING OFFICE 1987 704-036/74102

Source: https://assist.dla.mil -- Downloaded: 202640-17T15:20Z
Check the source to verify that this is the current version before use.