NOT MEASUREMENT SENSITIVE

MIL-DTL-11132/38D
6 June 1997
SUPERSEDING
MIL-I-11132/38C
17 January 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, GRADE, PRIVATE FIRST CLASS, SENIOR DIVISION, ROTC, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11132 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

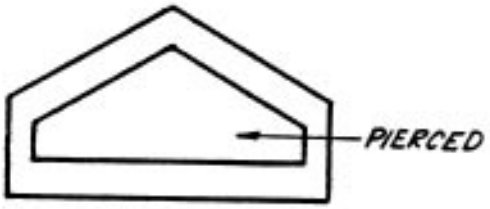

MATERIAL:
-1: Red Brass
-2: Red Brass or Zinc Aluminum

DASH NO.
-1: Regular
-2: Subdued

FINISH:
-1: Mirror-like Polished and shall match TIOH Metal Finish Chip Number 1.
-2: Dull, Flat Black Enamel.

DIMENSIONS:
HEIGHT (Overall): 1/2 inches (1.27 cm) (REF)
WIDTH (Overall): 13/16 inch (2.06 cm) (REF)
THICKNESS: 0.060 inch ± 0.005 inch (0.152 cm ± 0.12 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:21Z
Check the source to verify that this is the current version before use.

2. The dull flat black enamel for Dash No. -2 shall match FED-STD-595, Chip No. 37038.

3. Piercing shall be as indicated.

4. Attaching device shall be prong and clutch type. Prongs shall be located on a horizontal line 1/4 inch ± 1/32 inch (0.64 cm ± 0.08 cm) above the bottom of the insignia equidistant from each side and 11/16 inch ± 1/64 inch (1.75 cm ± 0.04 cm) apart.

5. Prongs shall be fused to the reverse of the insignia.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0894)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:21Z
Check the source to verify that this is the current version before use.