
MIL-A-22641/18
12 January 1965
SUPERSEDING
MIL-A-22641/8
through /13
15 September 1960

MILITARY SPECIFICATION SHEET

ADAPTERS, COAXIAL TO WAVEGUIDE (CLASS II - 5/8 INCH),
TYPES UG-403/U, UG-404/U, UG-445/U, UG-520/U, UG-521/U, UG-523/U,
UG-1647/U, UG-1648/U, UG-1649/U, UG-1650/U, UG-1651/U, AND UG-1652/U

The complete requirements for procuring the adapters described herein shall consist of this document and the latest issue of MIL-A-22641.

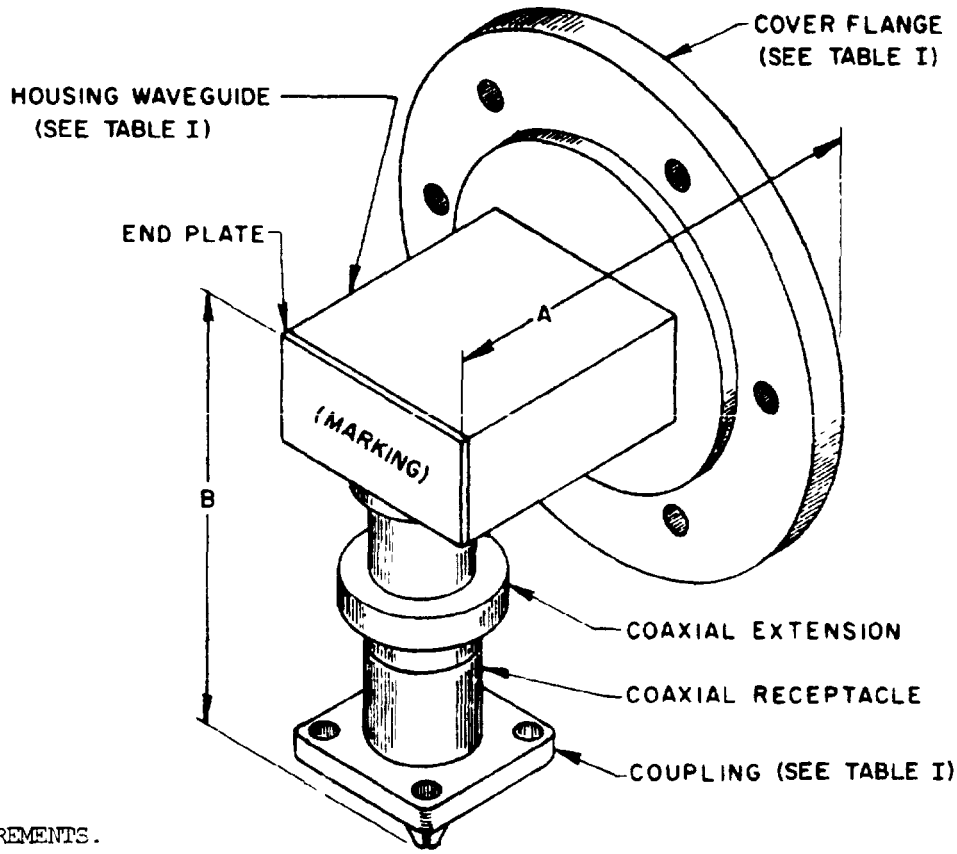

REQUIREMENTS.

Dimensions and configuration: See figure 1 and table I. The coaxial end shall be equivalent to the standard female coupling UG-141/U or male coupling UG-140/U and be capable of properly mating with male coupling UG-140/U or female coupling UG-141/U, respectively, as specified. (See table I.) (Bureau of Ships drawings REA49334 and REA49335).

VSWR See table I.

Frequency range. See table I.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 20260-19T13:11Z
Check the source to verify that this is the current version before use.

Table I - Adapters Coaxial to Waveguide (Class II - 5/8 Inch)

Part number	UG type	Housing waveguide	Cover flange 1/	Maximum A	Maximum B	Frequency range (mc)	VSWR over entire freq. range	VSWR over 50% freq. range	Coupling
M22641/18-01	UG-403/U	M85/1-063 RG-50/U	UG-344/U	2.250 (57.15)	2.625 (66.68)	5,[illegible]50-8,200	1.3	1.2	F
M22641/18-02	UG-520/U	M85/1-063 RG-50/U	UG-344/U	2.250 (57.15)	3.250 (82.55)	5,850-8,200	1.3	1.2	M
M22641/18-03	UG-445/U	M85/1-039 RG-48/U	UG-53/U	3.500 (88.90)	4.625 (117.48)	2,600-3,950	1.3	1.25	M
M22641/18-04	UG-523/U	M85/1-039 RG-48/U	UG-53/U	3.500 (88.90)	4.000 (101.60)	2,600-3,950	1.3	1.25	F
M22641/18-05	UG-521/U	M85/1-051 RG-49/U	UG-149A/U	3.000 (76.20)	3.625 (92.08)	3,950-5,850	1.3	1.2	M
M22641-18-06	UG-404/U	M85/1-051 RG-49/U	UG-149A/U	2.625 (66.68)	3.000 (76.20)	3,950-5,850	1.3	1.2	F
M22641/18-07	UG-[illegible]/U	M85/1-065 RG-106/U	UG-441/U	2.25[illegible] (57.15)	2.62[illegible] ([illegible])	[illegible]950-8,200	1.3	1.2	F
M22641/18-[illegible]	UG-[illegible]/U	M85/1-065 RG-106/U	UG-441/U	2.250 (57.15)	3.250 (82.55)	5,850-8,200	1.3	1.2	M
M22641/18-[illegible]	UG-[illegible]/U	M85/1-041 RG-75/U	UG-584/U	3.500 (88.90)	4.625 (117.48)	2,600-3,950	1.3	1.25	M
M22641/18-10	UG-[illegible]/U	M85/1-041 RG-75/U	UG-[illegible]/U	3.500 (88.90)	4.000 (101.60)	2,600-3,950	1.3	1.25	F
M22641/18-11	UG-[illegible]/U	M85/1-053 RG-9[illegible]/U	UG-[illegible]/U	3.000 (76.20)	3.625 (92.08)	3,950-5,850	1.3	1.2	M
M22641/18-12	UG-1652/U	M85/1-053 RG-95/U	UG-407/U	2.625 (66.68)	3.000 (76.20)	3,950-5,850	1.3	1.2	F

1/ Cover flange in accordance with MIL-F-3922

NOTES

1. Dimensions are in inches.
2. Metric equivalent in parentheses are given for general information only and are based upon 1 inch = 25.4 mm to the nearest .01 mm.

Custodians.
Army - EL
Navy - SH
Air Force - 11

Review activities:
Army - EL, MI, MU
Navy - SH
Air Force - 11, 17, 85

User activities
Army - MO
Navy - WP, MC
Air Force - None

Preparing activity.
Navy - SH
(Project 5985-0497)

Source: https://assist.dla.mil -- Downloaded: 202610-19T13:11Z
Check the source to verify that this is the current version before use.