INCH-POUND

MIL-P-22655C(MC)
28 MARCH 1991
SUPERSEDING
MIL-P-22655B(MC)
3 December 1971

MILITARY SPECIFICATION

PANEL MARKERS: AERIAL LIAISON; NYLON; FLUORESCENT

1. SCOPE

1. Scope. This specification covers the requirements for aerial liaison panel markers made of fluorescent nylon cloth.

1.2 Classification. The panel markers shall be of one type and size in the following classes, as specified (see 6.2).

Class 1 - Daylight Fluorescent Red
Class 2 - Daylight Fluorescent Yellow

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC-NA FSC 8345

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
UU-P-268	- Paper, Kraft, Wrapping.
CCC-C-476	- Cloth, Bunting Nylon and Nylon and Wool
DDD-L-20	- Label, For Clothing, Equipage, And Tentage, (General Use).

MILITARY

MIL-T-5661	- Tape And Webbing, Textile, Woven Reinforcing, Cotton
MIL-F-10884	- Fasteners, Snap.
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitches, Seams, And Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.
MS27980	- Fastener, Snap, Style 2.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094)

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS

U.S. Postal Service Manual

(Application for copies of the manual should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

2.2 Non-government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation.

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification Rules
(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification
(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N.W., Washington, D. C. 20026.)

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
Handbook of Colorimetry by Arthur C. Hardy
(Application for copies should be addressed to the MIT Press, Massachusetts Institute of Technology, Cambridge, Massachusetts 02142.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection and approval (see 4.4 and 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

3.3 Materials.

3.3.1 Basic material. The basic material shall be cloth, nylon bunting, conforming to type I, class A of CCC-C-476, except the requirements and respective quality assurance provisions for matching colorfastness and finish shall not apply. The finished fabric, when dyed with fluorescent dyes, shall show "good" fastness to wet and dry crocking and dry cleaning when tested as specified in 4.5.1.1. The finished fabric shall conform to the spectrophotometric properties specified in Table I when tested as specified in 4.6.1. In the event there is a failure of spectrophotometric properties, the alternate spectrophotometric properties shall be determined as specified in Table II when tested as specified in 4.6.2 and acceptance predicated upon these alternate requirements and test results.

Table I. Spectrophotometric properties of daylight fluorescent cloth colors

Wavelength of light reflected and emitted	Reflectance expressed as a percentage of light which would reflect from magnesium oxide			
	Red		Yellow	
millimicrons	min	max	min	max
400	12	25	--	14
420	--	--	--	12
440	16	30	--	--
450	20	35	--	--
480	--	--	25	35
490	--	--	22	35
520	--	--	12	24
530	--	8	10	22
540	--	8	--	--
550	--	8	--	--
560	--	--	--	--
580	--	--	115	--
590	--	--	120	--
600	--	--	115	--
610	--	--	--	--
620	--	--	90	--
630	135	--	--	--
640	135	--	75	--
650	135	--	--	--
680	105	--	65	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

Table II. Alternate spectrophotometric properties of daylight fluorescent cloth colors		
Characteristic reflected and emitted	Red	Yellow
Dominant wavelength (millimicrons)		580-589
Complement of dominant wavelength (millimicrons)	490-500	
Purity (percent)	57-63	65-71
Brightness, percent (minimum)	23	60

3.3.2 Tape, cotton. The tape for the edges and for making the loops at each corner of the panel marker shall be cotton, woven, 3/4 ±1/32-inch-wide, unbleached (natural), conforming to type I of MIL-T-5661, except the compatibility with dope requirement and method of test shall not apply.

3.3.3 Thread. The thread shall be cotton, unbleached, soft finish, ticket No. 50, 3-ply, conforming to type 1A1 of V-T-276.

3.3.4 Fasteners, snap. The snap fasteners shall be brass, nickel plated finish, conforming to style 2, finish 3 of MIL-F-10884 and MS27980. The fastener components shall consist of a button 3N, socket 6N, stud 7N, and eyelet 8N. Four sets of each type are required for each panel marker.

3.4 Design. The panel markers shall conform in all respects to the design shown in Figure 1.

3.5 Construction. The construction shall conform in all respects to Figure 1 and as specified herein.

3.5.1 Stitches, seams and stitchings. Stitch and seam types specified shall conform to FED-STD-751. All stitching and seaming shall be stitch type 301, 8 to 12 stitches per inch. Ends of seams and rows of stitching not caught in other seams or rows of stitching shall be backtacked not less than 1 inch. Thread breaks shall be secured by stitching back of break not less than 1 inch at each break. Thread tension shall be maintained properly so that there will be no loose stitching and the lock will be imbedded in the center of the materials sewn. All thread ends shall be trimmed.

3.5.2 Cutting. Each panel marker shall be made of a single ply of the basic cloth, in one piece (no seaming permitted), and shall be cut 1 inch more in length and width than the finished

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

measurements to permit each edge to be turned under 1/2 inch (see Figure 1). The 3/4 inch-tape shall be cut sufficiently long to permit formation of the corner loops as shown in Figure 1. The tape may be cut in individual lengths for each side or may be cut in lengths sufficient for two or more sides, without splicing.

3.5.3 Seam tape to cloth. Turn under each raw edge of the panel marker 1/2 inch and seam tape to each edge, forming the corner loops, using seam type SSs-2 of FED-STD-751. The two rows of stitching shall be 1/2 to 5/8 inch apart, and the stitching shall be 1/16 to 1/8 inch from each edge of the tape. The loops at each corner shall finish with a 1 $\pm$1/4 inch opening, measured flat as shown in Figure 1. The raw ends of the tape shall finish at the corners, and shall not be exposed.

3.5.4 Set snap fasteners. The snap fasteners shall be located as shown in Figure 1. All snap fastener buttons and studs shall be on the taped side of the panel. When holes are punched to receive the snap fasteners, the holes shall be smaller than the outside diameter of the barrel for the button and eyelet so that the barrel must be forced through the hole. Snap fasteners shall be securely clinched without cutting or otherwise damaging the material.

3.6 Finished measurements. The finished panel markers shall conform to the measurements shown in Figure 1

3.7 Identification label. An identification label shall be marked at the center of the tape along one of the short sides on each panel marker by direct printing or stamping. The marking shall conform to type IV, class 5 of DDD-L-20. The content shall be as follows:

PANEL MARKER: AERIAL LIAISON
Contract number
Stock number
Contractor's name

3.8 Workmanship. The finished panel markers shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.1.3 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)

b. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified all inspections shall be in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspection. When a first article is required (see 6.2), inspection shall be made of a completely fabricated panel marker for conformance to all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and material shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 202610-19T13:14Z
Check the source to verify that this is the current version before use.

4.5.1.1 Sampling for testing. The sample unit size for spectrophotometric properties shall be 1 yard, full width, put up on rolls and protected from exposure to light during preparation for shipment. The outside of the shipping pack shall be annotated as follows:

Sample for Spectrophotometric Properties -
Do Not Expose to Light.

The sample size shall be in accordance with CCC-C-476.

Table III - Component testing

Characteristic	Rqmt ref.	Test method	No. Determinations per sample unit	Results reported as
Colorfastness to:				
Dry cleaning 1/	Table I	5620	1	Pass or fail
Dry crocking 1/	Table I	5650	1	Pass or fail
Wet crocking 1/	Table I	5650	1	Pass or fail
Spectrophotometric properties	Table I	Para 4.6.1	2	Nearest %
Alternate spectrophotometric properties	Table II	Para 4.6.2	2	2/

1/ A certificate of compliance will be acceptable for this requirement.
2/ To the nearest millimicron or percent, whichever is applicable.

4.5.2 In-process inspection. Inspection shall be performed at any point or during any phase of the manufacturing process to determine whether operations or assemblies are being accomplished as specified herein. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with the specification requirements:

Requirement and operation	Requirement paragraph
Holes punched for snap fasteners are smaller than outside diameter of the barrel for the and eyelet.	3.5.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

Turn under (1/2 inch) of raw edges around panel marker.		3.5.3 and Figure 1

4.5.3 Examination of end item. The end item shall be examined for defects listed in 4.5.3.1 and 4.5.3.2. The sample unit for these examinations shall be one panel marker. The inspection level shall be II (see 6.5).

4.5.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Classification Minor
Quality of material	Any component not fabricated of specified material.	101	
Cloth, nylon	Hole, cut, tear, mend, darn, patch or other imperfection affecting serviceability.	102	
	Spot, stain, discoloration or streak which cannot be removed by wiping with a cloth dampened with lye free detergent in any 1 yard length.	103	
	Uneven dyeing, shadiness, spottiness, Poor penetration.	104	
Tape	Cut, abrasion, tear or affecting serviceability.	105	
	Not specified type, size or construction.		201
Thread	Not specified type, size or finish.	106	
Snap fasteners	Not specified type, style, size or finish.	107	
	Broken, cracked, fractured, damaged, malformed, bent out of shape or otherwise impaired.	108	

Source: https://assist.dla.mil -- Downloaded: 20260-19T13:14Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Design and construction	Varies from design or construction shown in Figure 1 or approved sample.	109	
	Any characteristics not in accordance with the specified design.		202
Workmanship and Assembly	More than one piece of nylon cloth used to make panel, i.e. material has seam.		203
	Raw edge of fabric turned under less than 1/2 inch.		204
	Tape spliced.		205
	Ends of tape exposed.		206
	Corner loop improperly formed.		207
	Snap fastener button and stud not on taped side of panel.	110	
	Hole punched to receive snap fastener not smaller than outside diameter of barrel for button.		208
	Snap fastener missing.	111	
	Snap fastener mispositioned:		
	Snap fasteners improperly assembled, improperly set, not securely clinched, will not engage socket, or otherwise defective, affecting serviceability.	112	
	Sharp burr, sliver or edge on snap fastener that may damage panel or cause injury.		209

Source: https://assist.dla.mil -- Downloaded: 20261O-19T13:14Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification Major	Classification Minor
	Cloth torn or damaged by attachment of snap fastener.	113	
	Not specified stitch type.		210
	Two or more stitches per inch less than the minimum specified.		211
	More than the specified number of stitches per inch, damaging fabric or tape.		212
	End of seams and rows of stitching backtacked less than 1 inch.		213
	Thread breaks backstitched less than 1 inch.		214
	Loose tension.		215
	Tight tension, resulting in excessive puckering.		216
	Broken stitches, open seams, run-off more than 3/8 inch.	114	
	Needle chew.	115	
	Stitching gage not as specified.		217
	Stitching margin irregular, less than specified, or unevenly gaged.		218
	Seam badly twisted, pleated or puckered.	116	
	Thread ends not trimmed.		219
	Not hemmed as shown on Figure 1.		220

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Marking	Missing, incomplete, illegible, not specified type.	117	
	Misspelled, not in specified location, or not applied in the specified manner.		221

4.5.3.2 Finished measurements. Each panel marker in the sample shall be examin d for dimensions. Any dimension that is not within the specified t lerances shall be classified as a defect. The inspection level shall be S-3 (see 6.5).

4.5.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 (see 6.5).

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing, any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as: incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of panel markers per container is more or less than required.

4.6 Tests.

4.6.1 Spectrophotometric properties. Specimens of cloth shall be cut out at a distance of at least 6 inches in from the selvage and each end of the sample. The specimens shall be cut from samples which have been protected from exposure to light. A color analyzer

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

shall be used. The specimen shall be directly illuminated, normal to the surface exposed, by the full spectral emission from a light source having the spectral quality of Commission Internationale del `Eclairage or International Commission on Illumination Source "C". The light reflected and emitted by the fluorescent material shall be picked up with a cylindrical mirror type apparatus and shall be evaluated spectrophotometrically with the instrument using a slit width of 0.1 millimeter. The Beckman DU or DK spectrophotometers, or equivalent, may be used as the instrument for obtaining the spectral data. The light shall be measured at wavelengths specified in Table I and expressed in terms of a percentage of the light which would be reflected from the reference standard, a freshly prepared magnesium oxide surface, under similar conditions. To minimize the effects of directional reflectance, readings at two positions shall be averaged (the original sample position and a position where the sample has been rotated through 90 degrees). Reading shall be taken on the face side of the cloth specimen backed up by three thicknesses of the cloth sample to minimize differences in cloth texture and background.

4.6.2 Alternate spectrophotometric properties. The present reflectance shall be determined for the fluorescent cloth by measuring light reflected and emitted at each of the following 30 wavelengths: 422, 432, 436, 439, 444, 450, 456, 461, 462, 469, 478, 489, 495, 515, 530, 541, 544, 552, 562, 564, 573, 577, 585, 589, 600, 601, 611, 624, 627, and 646 millimicrons. The measurements at 436, 461, 544, 564, 577, 589, 600, 611, 624, and 646 millimicrons shall be added together. The sum shall be multiplied by 0.098. The products shall equal "X". The measurements at 422, 432, 444, 450, 456, 462, 469, 478 and 495 millimicrons shall be added together. The sum shall be multiplied by 0.118. The product shall equal "Z". The measurements at 489, 515, 530, 541, 552, 562, 573, 585, 601 and 627 millimicrons shall be added together. The sum shall be multiplied by 0.100. The products shall equal the percent brightness "Y" of the reflected and emitted light. Dominant wavelength and purity of light reflected and emitted by the daylight fluorescent dyed cloth shall be determined by consulting charts in the Handbook of Colorimetry, after values for X and Y are calculated with the following equations:

$$X = \frac{X}{x + Y + z}$$

$$Y = \frac{Y}{x + Y + z}$$

In the case of the daylight fluorescent red color, the complement of the dominant wavelength is numerically: identical with the dominant wavelength determined by the above method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each panel marker shall be neatly folded to approximately 9-1/2 inches long by 7 inches wide and placed in an individual polyethylene bag measuring approximately 14 by 8 inches with a 1 inch lip along the open 8-inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. Prior to or during the final heat sealing operation, excess air within the bag shall be expelled. Each bag shall contain a label (see 5.3).

5.1.2 Commercial. Commercial packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice, provided it meets the requirements specified from commercial packing.

5.2 Packing. Packing shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Twenty (20) panel markers, of one class only, packaged as specified in 5.1, shall be packed in a shipping container with liner conforming to class-weather resistant, size No. 1A of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.1.2 Method 2. When specified (see 6.2), 12 level B shipping containers (240 panel markers) shall be packed in a shipping container conforming to class weather-resistant, size No. 4 of MIL-B-17757, assembled, closed and reinforced as specified in the appendix thereto.

5.2.2 Level B. Twenty (20) panel markers, of one class only, packaged as specified in 5.1, shall be packed in a shipping container with liner, conforming to class domestic, size No. 1A of MIL-B-17757, assembled and closed as specified in the appendix thereto. The fiberboard used in fabrication of the box and liner shall be grades 275 and 200 respectively. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial. Panel markers, of one class only, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. Also, polyethylene bagged packages shall have the following information printed or stamped directly on the bag or on a paper label inserted within the bag so as to permit ready identification.

Panel marker, Aerial Liaison, 26" x 18"
Federal Stock No.
Contract No.
Contractor's Name

6. NOTES
(This sections contains information of a general explanatory nature that may be helpful but is not mandatory).

6.1 Intended use. The panel markers are intended for use by the Marine Corps ground forces for ground to air identification and communications, and are designed to be attached to each other by means of snap fasteners to form various sizes and combinations. They may be secured to the ground by means of steel pins through the corner loops.

6.2. Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Class required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of panels in first article (see 3.2).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When level A, method 2, packing is required (see 5.2.1.2).

6.3 Standard samples and shade samples. For information regarding the availability of samples of the panel markers and standard shades, address inquiry to the acquisitioning activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects and 10.0 for total (major and minor combined) defects is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For packaging examination. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.6 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.


6.7 Subject (key word) listing.


Ground troops
Identification

6.8 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to extensive changes.

Preparing activity:
Navy - MC
Project No. 8345N189


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.

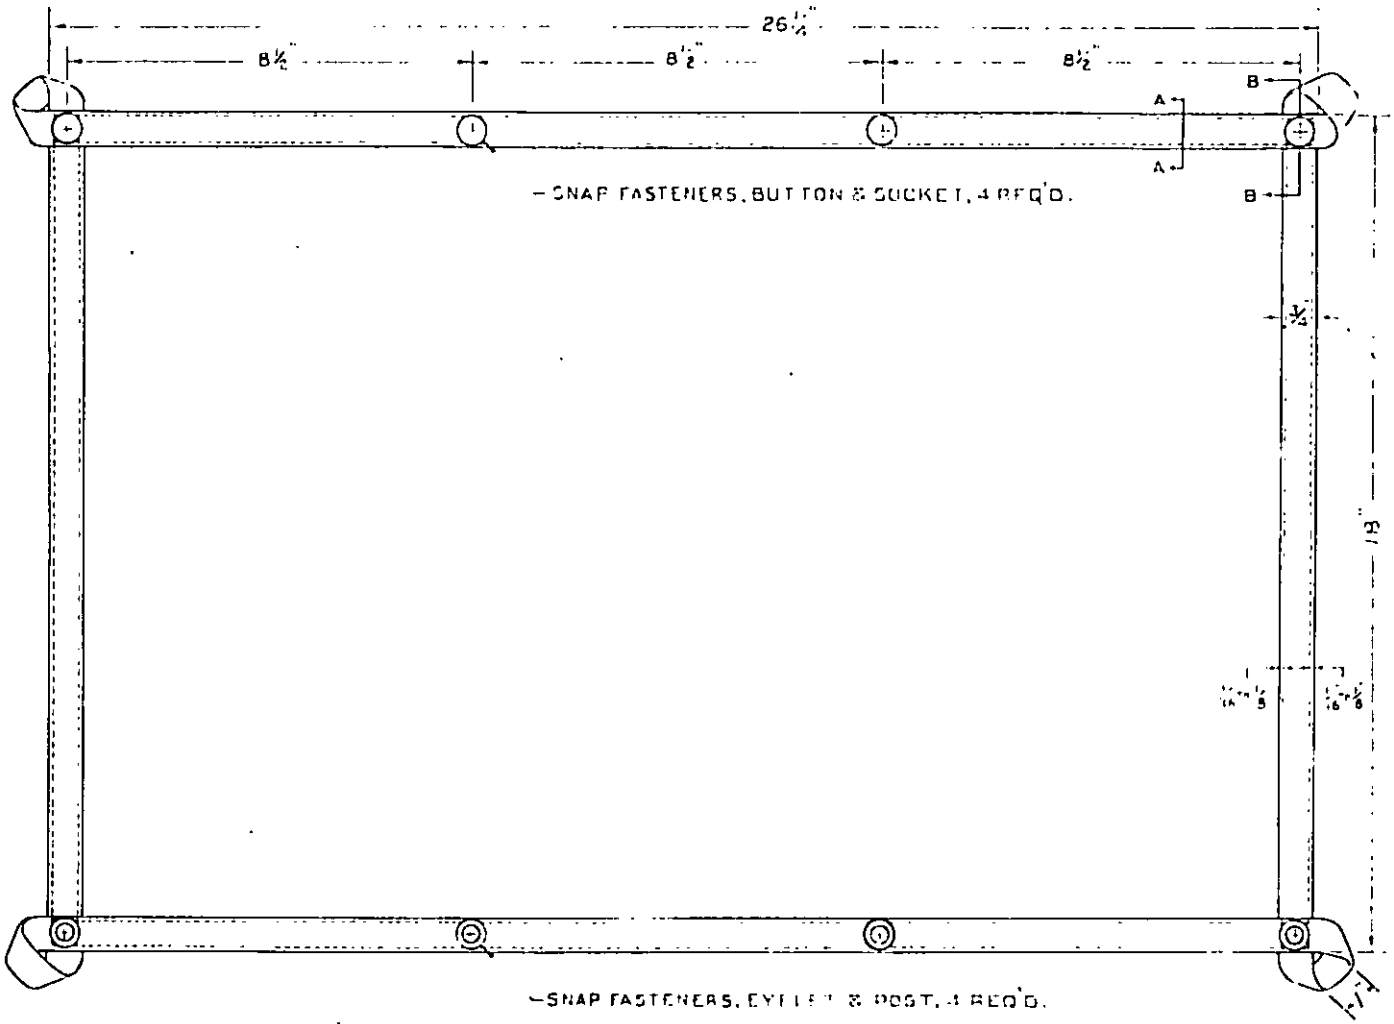



SECTION A-A

TAPE

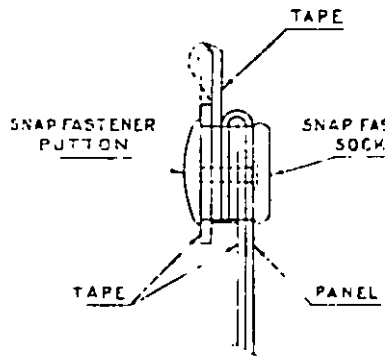

SECTION B-B

NOTES:
1. BASIC MATERIAL – CLOTH, NYLON, FLUORESCENT
2. COLOR – CLASS 1. DAYLIGHT FLUORESCENT RED
CLASS 2. DAYLIGHT FLUORESCENT YELLOW

TOLERANCES:
OVERALL LENGTH AND WIDTH – ± ½ INCH
LOOP OPENING – ± ¼ INCH
DISTANCE BETWEEN SNAP FASTENERS – ± ¼ INCH

FIGURE 1. PANEL MARKER: AERIAL LIAISON; FLUORESCENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:14Z
Check the source to verify that this is the current version before use.