MIL-C-27845C
5 December 1977
SUPERSEDING
MIL-C-27845B
16 July 1970

MILITARY SPECIFICATION

COVERALLS, MEN'S CMU-3/P

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers the requirements for one type of one-piece, white, cotton coveralls furnished in the following sizes and lengths, as specified (6.2):

SCHEDULE OF SIZES

X-SMALL	SMALL	MEDIUM	LARGE	EXTRA LARGE
Short	Short	Short	Short	Short
Regular	Regular	Regular	Regular	Regular
Long	Long	Long	Long	Long

2. APPLICABLE DOCUMENTS

* 2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

Federal

V-B-871	Button, Sewing Hole, And Button, Staple, (Plastic)
V-F-106	Fasteners, Slide, Interlocking
V-T-276	Thread, Cotton
V-T-280	Thread, Cotton, Gimp, Buttonhole
CCC-C-426	Cloth, Drill, Cotton
DDD-L-20	Label; For Clothing, Equipage, And Tentage, (General Use)
PPP-F-320	Fiberboard, Corrugated And Solid, Sheet Stock (Container Grade), And Cut Shapes

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: HQ AFLC CASO/LODS, Federal Center, Battle Creek MI 49016 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	Preservation - Packaging, Methods of
MIL-B-371	Braid, Textile, Tubular
MIL-W-530	Webbing, Textile, Cotton, General Purpose, Natural Or In Colors
MIL-C-10296	Cloth, Sateen, Cotton
MIL-G-16491	Grommet, Metallic
MIL-B-17757	Boxes, Fiberboard, Corrugated (Modular Sizes)
MIL-F-21840	Fastener Tape, Hook And Pile, Nylon

STANDARDS

Federal

FED-STD-191	Textile Test Methods
FED-STD-751	Stitches, Seams, And Stitchings

Military

MIL-STD-105	Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-129	Marking For Shipment And Storage
MS27981	Fasteners, Snap, Style 2A (Small Wire Spring Clamp Type)

DRAWING

Air Force

62C4097	Coverall, Men's CMU-3/P

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.

* 3.1.1 Basic material. The basic material shall be white, cotton sateen cloth, conforming to class 2 of MIL-C-10296.

3.1.2 Thread. The thread for all seaming and stitching shall conform to type IA2 or IB2, ticket No. 30, 3 ply of V-T-276. The thread used for the looper thread in stitch type 401 shall conform to type IA2 or IB2, ticket No. 50, 3 ply of V-T-276. The color of the thread shall be white.

3.1.3 Gimp. The gimp used for reinforcing the buttonholes shall conform to type II, size No. 8 of V-T-280. The color of the thread shall be white.

3.1.4 Tape. The tape for the sleeve and the leg take-ups and the pocket flap hold-downs shall be white, 1-inch wide, nylon fastener tape conforming to type II of MIL-F-21840.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

* 3.1.5 Pockets. The material for the side slash pockets shall be cotton drill cloth conforming to type II, class 2 of CCC-C-426. As an alternate, the material for the side slash pocket may be of basic material (see 3.1.1).

3.1.6 Slide fastener. The slide fastener for the front closure shall be type I, style 15, size MS of V-F-106. The chain shall be brass with a short pull tab to accommodate a 3/8-inch wide thong. The tape shall be cotton or cotton warp and nylon filling. The finish of the metal shall be black chemical. The length of the slide fastener shall fit front opening shown on patterns.

* 3.1.6.1 Thong. The material for the thong for the slide fastener shall conform to type IIa, class I of MIL-W-530. It shall be 3/8 inch wide and 7 inches long and be made of basic material.

3.1.7 Braid. The braid for the drawstring for the waist take-up shall conform to type IV, class 1 of MIL-B-371. The length of the drawstring shall be such that it can be threaded in a taut manner through each eyelet of the waist channeling and knotted at each end, with 1 inch of drawstring extending in front of each knot. Both ends of the drawstring shall be tipped or coated with a laundry-proof resin to prevent raveling.

3.1.8 Grommets. The grommets used in the drawstring waist take-up channel shall conform to type I, class 1, size No. 0 of MIL-G-16491.

3.1.9 Button. The button for the neck closure shall conform to type II, class D, style 20 and 21, size 30 line of V-B-871. The color of the button shall be white.

3.1.10 Snap fasteners. The snap fasteners shall consist of:

Button - MS27981-2N or -2C	Stud - MS27981-4N or -4C
Socket - MS27981-3N or -3C	Eyelet - MS27981-6N or 6C

3.2 Design. The coverall shall be a one-piece, white garment with a lapel button and button hole and slide-fastener closure. Adjustments of the coveralls shall be accomplished by take-ups on the ankles and the wrists and by a drawstring around the waist. The coveralls shall have two breast patch pockets, two hip patch pockets, with a flap on the left hip pocket, two side slash pockets with pass-throughs, a tool pocket on the thigh of the right leg, and a pencil pocket on the upper left sleeve.

3.3 Construction. The coveralls shall be constructed in accordance with Table I, but the manufacturer is not required to follow the exact sequence of operations as listed therein.

3.3.1 Stitches, seams, and stitchings. Unless otherwise specified in Table I, stitches, seams, and stitchings shall conform to FED-STD-751. Whenever two or more methods, seams, or stitches are specified for the same operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the coveralls. Unless otherwise specified, top stitching and edge stitching shall be 1/16-inch gage from the edge. Unless caught in other seams or cross stitching, all ends of stitching shall be securely backstitched, not less than 1/2 inch, with a continuous stitch. Thread breaks shall be backstitched not less than 1/2 inch.

3.3.2 Buttonholes. The buttonholes shall be eyelet-end, taper-bar type, worked over gimp to fit a 30-line button.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
1.	Cutting. All component parts of the coverall, except undercollar, under ply of flaps, and hanger, shall be cut from the same piece of material, in strict accordance with the patterns that show size, shape, warp direction lines, notches, and markings for proper assembly of all parts. The directional line may vary from the warp direction by not more than 1 inch on both the blouse and the trouser parts. The measurement shall be taken from the top and the bottom of the directional line on the pattern to the selvage edge. The side slash pocket may be cut from ends.			
2.	Shade marking. All parts, except those cut from ends, shall be marked to ensure a uniform shade throughout the coveralls. Corrosive metal fastening devices or tickets sewn on by machine shall not be used to shade mark component parts.			
3.	Collar. The collar shall be fabricated from two plies of the basic material.			
	a. Join the sides and the top of the collar to the undercollar, with a single row of stitching, 1/4 inch from the edge.	301 or 401	SSe-2(a)	8-10
	b. Turn, force out edges; edge stitch the side and the top edges of the collar 1/8 inch from the edge. Edge stitching of the collar may be performed in operation No. 29.	301	SSe-2(b)	8-10
4.	Breast pockets. Double fold the top of the pockets 3/8 inch to the inside, and join with a double row of stitching, 1/16 inch from the edge, 3/16-inch to 1/4-inch gage.	301	EFb-2	8-10
	a. Sew a 3-inch length of pile tape to the outside of each pocket, at the drill marks, on four sides, with a single row of stitching, 1/16 inch from the edge.	301	LSa-1	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
	b. Flaps. Sew a 3-inch length of hook tape to the outside of each underside of the flap, at the drill marks, on four sides, with a single row of stitching, 1/16 inch from the edge.	301	LSa-1	8-10
	c. Join the flaps at the ends and the shaped edges, with a single row of stitching, 1/4 inch from the edge.	301	SSe-2(a)	8-10
	d. Turn and raise with a single row of stitching. 3/16 to 1/4 inch from the turned edges.	301	SSe-2(b)	8-10
5.	Hip pockets. Double fold the top of the pockets 3/8 inch to the inside and join with a double row of stitching, 1/16 inch from the edge, 3/16-inch to 1/4-inch gage.	301	EFb-2	8-10
	a. Sew a 4-inch length of pile tape to the outside of the left pocket at the drill marks, on all four sides, with a single row of stitching 1/16 inch from the edge.	301	LSa-1	8-10
	b. Left flap. Sew a 4-inch length of hook tape to the out side of the underside of the flap at the drill marks, on all four sides, with a single row of stitching 1/16 inch from the edge.	301	LSa-1	8-10
	c. Join the flap at the ends and the shaped edges with a single row of stitching, 1/4 inch from the edge.	301	SSE-2(a)	8-10
	d. Turn and raise with a single row of stitching, 3/16- to 1/4-inch, 1/16 inch from the turned edges.	301	SSe-2(b)	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
6.	Attach breast pockets. Fold the raw edges under 1/2 inch and join at the drill marks with a double row of stitching, 1/16 inch from the edge, 3/16 inch to 1/4 inch gage.	301	LSd-2	8-10
7.	Attach breast pocket flaps. Place the raw edge of the flap 1/2 inch up from the edge of the pocket, and join with a single row of stitching 3/16 to 1/4 inch from the edge.	301	LSbk-2(a)	8-10
	a. Fold down flap and raise with a single row of stitching 3/16 to 1/4 inch from the folded edge.	301	LSbk-2(b) or LSbl-2(b)	8-10
8.	Tool pocket. Double hem the pocket opening 3/4 inch and sew with a double row of stitching, 1/16 inch from the edge, 5/8-inch gage.	301	EFb-2	8-10
	a. Place the pocket on the right back leg at the pattern notch even with the side seam. Turn the bottom and the long edge under 3/8 inch and join with a double row of stitching, 1/16 inch from the edge, 3/16-inch to 1/4-inch gage and the top shall be caught under the seam of the hip pocket.	301	LSd-2	8-10
9.	Attach left hip pocket flap. Place the raw edge of the flap 1/2 inch up from the edge of the pocket and join with a single row of stitching, 3/16 to 1/4 inch from the edge.	301	LSbk-2(a)	8-10
	a. Fold down flap and raise with a single row of stitching 3/16 to 1/4 inch from the folded edge.	301	LSbk-2(b) or LSbl-2(b)	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
10.	Make side pockets. Sew the side pocket facing on the drill pocket material with the slanted edge turned under 1/2 inch and with the widest portion of the facing at the waistline, the facing overlapping the pocket material 3/4 inch with a double row of stitching, 1/16 inch from the edge, 3/16-inch to 1/4-inch gage.	301	LSd-1	8-10
	a. Double hem the pocket facing over the raw edge of the pocket 3/8 inch and sew with a double row of stitching, 1/16 inch from the edge, 3/16-inch to 1/4-inch gage.	301	EFb-2	8-10
	b. Join the pocket drill material to the pocket opening by folding 1 inch over the edge of the drill material and then 1/4 inch up under. Sew with a double row of stitching, 1/16 inch from the edge, 5/8-inch gage.	301	EFb-2	8-10
	c. Fold the pocket at the notches and join around the bottom with a single row of stitching, 1/4 inch from the edge.	301 or 401	SSa-1	8-10
	d. Overedge stitch around the bottom of the pockets. NOTE: Operation 10c and 10d above may be performed in one operation.	Any series except 501	SSa-2	8-10
	e. Double hem the front edge of the pass-through 3/8 inch and join with a single row of stitching, 5/16 inch from the folded edge.	301	EFb-1	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
	f. Place the pass-through on the pocket at the notch and sew across the top and approximately 1 inch of the side with a single row of stitching, 1/4 inch from the edge.	301	SFa-1	8-10
	g. Place a horizontal bartack 1/2 inch long 8 inches from the top raw edge of the trouser front, catching the pocket and the pass-through.	bartack		28 per bartack
	h. Place a row of stitching starting below the bartack catching the pocket, facing and pass-through.	301	SSa-1	8-10
11.	Attach hip pockets. Fold the raw edges under 1/2 inch and join at the drill marks with a double row of stitching 1/16 inch from the edge, 3/16-inch to 1/4 inch gage.	301	LSd-2	8-10
12.	Pencil pocket. Double hem the top of the pencil pocket 3/8 inch and sew with a double row of stitching 1/16 inch from the edge, 3/16-inch to 1/4-inch gage.	301	EFb-2	8-10
	a. Attach pencil pocket. Join the pocket to the left sleeve at the drill marks; turn under the sides and bottom; sew with a single row of stitching, 1/16 inch from the edge.	301	LSd-1	8-10
	b. Sew a single row of stitching on the center of the pocket from the top to the bottom.	301	SSv-1	8-10
	c. Bartack all compartment openings of the pencil pocket with a vertical bartack 1/2 inch long.	bartack		28 per bartack

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
13.	Sleeves. Join the elbow seam of the sleeves, the top sleeve are overlaping the undersleeve, double lap and sew with a double row of stitching 1/16 inch from the edge, 1/4-inch to 5/16-inch gage, catching the hook tape tab in the seam with the bottom edge of the tape two inches from the finished sleeve terminals. Cut the hook tape 4-3/4 inches long.			
14.	Upper back seam. Join the backs, the right overlapping the left; double lap and sew with a double row of stitching 1/16 inch from the edge, 1/4-inch to 5/16-inch gage.	301 or 401	LSc-2	8-10
15.	Seat seam. Join the seat seam, the right overlapping the left, double lap and sew with a double row of stitching 1/16 inch from the edge, 1/4-inch to 5/16-inch gage.	301 or 401	LSc-2	8-10
16.	Waist seam. Join the upper backs to the lower backs with a single row of stitching 1/2 inch from the edge; the seam shall be to the outside. Spread the seam open and stitch on each side of the seam, 3/16-inch to 1/4-inch gage. A single needle or a double-needle machine may be used.	301 or 401	SSz-3	8-10
	a. Join the upper fronts to the lower fronts with a single row of stitching, 1/2 inch from the edge; the seam shall be to the outside. Spread the seam open and stitch on each side of the seam, 3/16-inch to 1/4-inch gage. A single-needle or a double-needle machine may be used. The top of side pockets shall be caught in the stitching.	301 or 401	SSz-3	8-10
	b. Overedge the left front edge, and waistband, top to crotch.	Any series except 501	EFd-1	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
17.	Shoulder seam. Join the shoulders, the front overlapping the back; double lap and sew with a double row of stitching 1/16 inch from the edge, 1/4-inch to 5/16-inch gage.	301 or 401	LSc-2	8-10
18.	Join sleeves to armhole. Join the sleeves to the armholes, the fronts overlapping the back; double lap and sew with a double row of stitching 1/16 inch from the edge, 1/4-inch to 5/16-inch gage.	301 or 401	LSc-2	8-10
19.	Side seams. Join the side seams from the leg terminals to the sleeve terminals catching the hook tape tab in the seam with the bottom edge of tape 2 inches from the finished sleeve terminals, the fronts overlapping the backs; double lap and sew with a double row of stitching 1/16 inch from the edge, 1/4-inch to 5/16-inch gage. Cut the hook tape 4-3/4 inches long.	301 or 401	LSc-2	8-10
20.	Install grommets. Install two grommets, centered on the waist seam, adjacent to inside hanging sidepocketing.			
21.	Waistband. Thread the ends of the drawstring through the grommets; knot each end of the drawstring. The knots shall be flush with the grommets when the waist is stretched. One inch of the drawstring shall extend in front of each knot. Both ends of the drawstring shall be tipped or coated as specified in 3.1.7.			
	a. Join the waistband, centered over the waist seam. Turn the raw edges under 1/4 to 1/2 inch and join with a double row of stitching 1/16 to 1/8 inch from each edge.	301 or 401	LSd-1	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
22.	Lapel facing. Hem the left lapel by turning the bottom edge under 3/8 inch and the long side 1/4 inch; sew with a single row of stitching 1/16 inch from the folded edge.	301	FFa-1	8-10
	a. Join the left lapel facing from the collar notch, down the front to the bottom finished edge with a single row of stitching 3/8 inch from the edge.	301	SSa-1	8 10
23.	Protective fly. Join the ends with a single row of stitching 3/8 inch from the edge.	301	SSe-2(a)	8-10
	a. Turn and edge stitch with a single row of stitching, 3/16 to 1/4 inch from the edge, at the ends and the folded edge.	301 301	SSe 2(b) OSf 1	8 10 8-10
	b. Quilt the fly through-and-through with two rows of vertical stitching 1/4 inch gage down center, from top to bottom of protective fly.	301	SSv-1	8-10
24.	Attach slide fastener. Join slide fastener to the left front starting at the notch and stitch with a double row of stitching 1/8 inch from the edge.	301	SSa-2	8-10
	a. Join the slide fastener to the right front with a single row of stitching 3/8 inch from the edge of the tape, joining the protective fly and the front facing, continuing up to the collar notch. The slide-fastener tape shall be exposed approximately 1/4 inch.	301	SSa-1	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
	b. The slide fastener shall be attached without an excessive length of tape put in at any one point. The tape at the top shall be turned under and finished with no raw edge exposed.			
	c. Insert the thong through the hole in the pull tab in the top slider with both ends even, and place three bartacks 3/8 inch long through the thong equally spaced at the end, close to the pull tab and center.	bartack		28 per bartack
25.	Hanger. The hanger shall be constructed from the basic material. The finished hanger before attachment, shall be 3/8 inch wide and 3-1/2 inches long, and the opening shall measure 1/2 ±1/4 inch after attachment.	301	FFp-2	8-10
26.	Attach label. Stitch the label around four sides to the inside back of the coveralls, centered 1/2 to 1 inch below the collar seam.	301	SSa-1	8-10
27.	Attach collar. Join the undercollar to the neck opening from notch to notch, with a single row of stitching 3/8 inch from the edge.	301	SSa-1	8-10
28.	Front facing. Fold the inside edge of the facing out 1/4 inch at the top and join through the collar to the notch with a single row of stitching, 3/8 inch from the edge.	301	SSa-1	8-10
	a. Turn; work out points. Clip the topcollar at the notch into the stitching.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
	b. Turn the topcollar under 1/4 inch and sew down to the neck of the coveralls between the facings with a single row of stitching, 1/16 inch from the edge, catching the hanger in the seaming operation at the center back.	301	LSd-1	8-10
29.	Snap fasteners. Stamp two sockets to the left front, 1/4 inch in from the front edge at the center of the waistband and 1/2 inch from the bottom edge lapel facing, with the socket on the face side.			
	a. Stamp two studs to the right front, matching the sockets on the left front.			
30.	Raise fronts. Fold the right facing to the inside and raise with a single row of stitching, 1/16 inch to 1/8 inch from the folded edge, from the bottom of the slide fastener, catching the facing and the protective fly in the seam. Sew up the right side, around the collar, down the left front to the bottom of the slide fastener, folding the front to the inside.	301	SSe-2(b) OSf-1, and SSq-2(b)	8-10
31.	Crotch seam. Place the left front panel on the right front panel with the face sides together, thy edge of the left panel back 3/8 inch from the edge of the right panel; join with a single row of stitching 3/8 inch from the edge of the left panel.	301	LSr-2(a)	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
	a. Turn the left panel over the first row of stitching, folding in the edge of the right panel 3/8 inch; join with a single row of stitching 1/16 inch from the folded edge through the left panel and the turned-in edge of the right panel.	301	LSr-2(a)	8-10
	b. Sew an additional row of stitching 1/16 inch from the folded top edge 1/4 to 5/16 inch from the first row of top stitching.	301	SSa-1	8-10
	or			
	c. Turn crotch seam of right front to outside and stitch 1/16 to 1/8 inch from edge. Turn edge of left front crotch seam to inside and double stitch, 3/16- to 1/4-inch gage, catching the right front crotch seam with both rows of stitching; the outer row of stitching shall be 1/16 to 1/8 inch from the folded edge.	301	EFa-1 and LSb-1	8-10
32.	Right facing. Turn under 3/8 inch of the raw edge and sew with a single row of stitching, 1/16 inch from the edge, from the bottom to the collar.	301	LSd-1	8-10
	a. Left facing. Join from the bottom to the collar with a single row of stitching 1/16 inch from the edge.	301	LSd-1	8-10
	b. Join the bottom edge of the left lapel facing to the front with a single row of stitching 1/16 inch from the edge.	301	LSd-1	8-10
	c. Place a 1/2 inch bartack at bottom of front slide fastener.	bartack		28 stitches per bartack

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
33.	Inseam. Join the inseam, with the back overlapping the front, double lap and sew with a double row of stitching, 1/4-inch to 5/16-inch gage, catching the hook tab in the seam at the pattern notch 2-1/4 inches from the trouser terminal. Cut the hook tape 6 inches long.	301 or 401	LSc-2	8-10
34.	Adjustment tape. Join the 13-inch long pile tape with a single row of stitching 1/16 inch from the edge, on four sides, with the bottom edge of the tape 2-1/4 inches from the finished leg terminals and starting at the center of the back part.	301	SSa-1	8-10
	a. Join the 7-inch long pile tape with a single row of stitching 1/16 inch from the edge, on four sides, with the bottom edge of the tape 2 inches from the finished sleeve terminals and 1 inch from the tab.	301	SSa-1	8-10
	b. Fold the ends of the leg and the sleeve tabs in 3/4 inch and sew with a single row of stitching 1/16 inch from the edge, forming a box and an "X" stitch, 1/2 inch by 7/8 inch or place two 3/4 inch bartacks, one at folded edge and one at raw edge.	301	SSa-1	8-10
35.	Hem leg terminals. With the raw edges turned under 1/2 inch, hem the bottom of the trousers; sew with a single row of stitching, 1/16 inch from the edge, through the legs. The finished hem shall be 1-1/2 inches wide.	301	EFb-1	8-10
36.	Hem sleeves. Turn up the bottom of the sleeves with the raw edges turned under 1/2 inch and stitch with a single row of stitching, 1/16 inch from the edge. The finished hem shall be 1-1/4 inches wide.	301	EFb-1	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations (Cont'd)

No.	Description of Operation	Stitch type	Seam and stitching type	Stitches per inch
37.	Buttonhole. Make a buttonhole in the left lapel as indicated by the marks on the patterns. The bottonhole shall be of the eyelet end, taper-bar type worked over a No. 8 gimp to fit a 30-line button; the ends shall be securely tacked. The purling shall be on the facing side.	button-hole		46 per hole not including tacks
38.	Button. Sew a 30-line button on the right lapel, located approximately 5/8 inch down from the collar and 2-3/8 inch from the front edge and corresponding with the buttonhole.	101 or 301		22 per button 16 per button
39.	Clean coveralls.			
	a. Trim and remove all ends of threads.			
	b. Remove all spots and stains.			
	c. Examine and fold the coveralls for packaging.			
40.	Tolerances.			
	a. Positioning snap fasteners and collar button. A tolerance of ±1/16 inch off-center will be allowed for positioning snap fasteners and the collar button.			
	b. Dimensions. Unless otherwise specified, the tolerances shall be ±1/16 inch for dimensions under 1 inch, ±1/8 inch for dimension from 1 to 5 inches, ±1/4 inch for dimensions from 5 to 40 inches, and ±1/2 inch for dimensions over 40 inches.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

3.4 Patterns. The dies or patterns for cutting all parts of the coveralls shall be furnished by the manufacturer. The manufacturer's working patterns shall be identical in size and shape to the patterns referenced on USAF Drawing 62C4097. The working patterns shall be duplicates of the Government patterns.

3.5 Finished measurements. The finished measurements of the coveralls shall conform to Table II.

3.6 Identification of product. A label conforming to type I, class 1 of DDD-L-20 shall be sewn to the inside of the coveralls. The labels shall show fastness to laundering. The label shall include the following specific information:

COVERALLS, MEN'S CMU-3/P
MIL-C-27845C
Size and length 1/
Manufacturer's name or trademark 1/
Contract No. 1/

1/ The manufacturer shall insert the applicable information.

3.7 Workmanship. The finished coverall shall be clean, well-made, and free from any defects that might affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Unless otherwise indicated hereinafter, inspection shall be in accordance with the provisions set forth in MIL-STD-105.

4.2.1 Testing of components. Testing of components shall be made in accordance with applicable subsidiary specifications and drawings referenced herein to the extent applicable.

4.2.2 Examination of end item. The end item shall be examined for defects. Defects found during examination of the end item shall be classified in accordance with 4.2.2.1, 4.2.2.2, and 4.2.2.3. The inspection levels shall be II of MIL-STD-105 for 4.2.2.1 and 4.2.2.2, and S-3 of MIL-STD-105 for 4.2.2.3. The acceptable quality level for 4.2.2.1 and 4.2.2.2 shall be 2.5 defects per 100 units for major defects, 15.0 defects per 100 units for major and minor A defects, and 40.0 defects per 100 units for major and minor A and B defects. The acceptable quality level for 4.2.2.3 shall be 4.0 defects per 100 units for defects (one class).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

TABLE II. Finished measurements (inches)

Size	Measurement 1/		
	1/2 Breast	Sleeve inseam	Leg inseam
X-Small			
Short	20-1/2	18-1/2	28
Regular	20-1/2	19-3/4	30
Long	20-1/2	21	32
Small			
Short	22-1/2	19	28
Regular	22-1/2	20-1/4	30
Long	22-1/2	21-1/2	32
Medium			
Short	24-1/2	19	28
Regular	24-1/2	20-1/4	30
Long	24-1/2	21-1/2	32
Large			
Short	26-1/2	19	28
Regular	26-1/2	20-1/4	30
Long	26-1/2	21-1/2	32
Extra Large			
Short	28-1/2	19	28
Regular	28-1/2	20-1/4	30
Long	28-1/2	21-1/2	32

1/ The measurement of the 1/2 breast shall be taken, with the slide fastener closed and the front of the coveralls smoothed flat, across the front of the coat part from folded edge to folded edge.

The measurement of the sleeve inseam shall be taken along the inseam of the sleeve from the base of the armhole to the bottom of the cuff.

The measurement of the leg inseam shall be taken along the inside of the leg from the base of the crotch to the bottom of the leg.

Tolerance for the measurements shall be ±3/4 inch for the 1/2 breast, ±1/2 inch for the sleeve inseam, and ±1/2 inch for the leg inseam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

4.2.2.1 General defects. General defects shall be classified as follows:

	Classification		
		Minor	
	Major	A	B
1. Bartacks			
a. Missing, insecure, or misplaced not serving intended purpose:			
-one bartack (unless otherwise classified herein)			X
-two bartacks		X	
-three or more bartacks	X		
2. Cleanness			
a. Any spot or stain on outside, seriously affecting appearance		X	
b. Thread ends not trimmed or trimmed thread ends not removed (to be scored when the condition exists on the major portion of the coveralls)			X
c. Two or more shade tickets not removed			X
d. Shade marking exposed on outside of coveralls, seriously affecting appearance		X	
3. Components and assembly			
a. Any defective component or defect of assembly:			
-affecting appearance or serviceability seriously	X		
-affecting appearance or serviceability but not seriously		X	
b. Any component part or required operation omitted:			
-affecting apperance or serviceability seriously	X		
-affecting appearance or serviceability but not seriously		X	
4. Cutting			
a. Any component part not in accordance with patterns	X		
5. Label			
a. Missing, or size information incorrect, missing, or illegible		X	
b. Information other than size incorrect			X
c. Not stitched on four sides			X
d. Top of label placed:			
-over 1 inch or under 1/2 inch from neck seam			X
-off-center of back by more than 1 inch			X
e. Size shown on the item label not in conformance with size shown on container			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
6. Material defects and workmanship damages. Material defects and workmanship damages that are inconspicuous and do not definitely weaken the material shall not be classified as defects. If the defect does not definitely weaken the material but is conspicuous when the item is worn or if the material defects and workmanship damages definitely weaken the material, the material defects and workmanship damages shall be classified as follows:			
a. Any weakening defect such as a hole, smash, multiple float, loose slub, et cetera.	X		
b. Shade bars, unsightly slubs, or any other similar nonweakening defects, affecting appearance:			
-on outside of coveralls		X	
-on inside of coveralls			X
c. Large drill hole, cut, tear, mend, burn, or needle-chew	X		
d. Ruptured fibers in the line of sewing (usually caused by broken, blunt, or hooked needles), affecting appearance or serviceability.		X	
7. Nylon fastener tape			
a. Not specified type, size, or color		X	
b. Missing, insecurely sewn, or otherwise defective		X	
c. Free end not crossed boxstitched		X	
8. Seams and stitchings			
a. Accuracy of seaming:			
(1) Seam twisted, puckered, or pleated, seriously affecting appearance		X	
(2) Part of garment caught in any unrelated operation or stitching, seriously affecting appearance		X	
(3) Thread breaks or end(s) of stitching (when not caught in other seams or stitching) not backstitched			X
(4) Looper thread of stitch type 401 finishing on the outside of the garment	X		
b. Gage of stitching (edge, top, or raise stitching):			
(1) Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged, affecting appearance		X	
(2) Not within range of width specified or varies more than 1/16 inch when no range is specified			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
c. Open seam: A break in a line of stitching or continuous skipped or run-off stitches (except on edge, top, or raise stitching) shall constitute an open seam.			
(1) On joining seam(s):			
-over 1/8 inch to and including 1/4 inch			X
-over 1/4 inch	X		
(2) On hem(s):			
-over 1/4 inch	X		
d. Stitches skipped or broken (on quilting stitching, edge, top, or raise stitching when seam is seamed, turned, and stitched):			
-over 1/4 inch to and including 1/2 inch			X
-over 1/2 inch		X	
e. Raw edges: A raw edge is classified as such when it occurs along an edge required to be turned under but the edge is securely caught in the stitching. If the edge is not securely caught in the stitching, it shall be scored as an open seam:			
(1) On outside:			
-over 1/8 inch to and including 1/4 inch			X
-over 1/4 inch		X	
(2) On inside:			
-over 1/2 inch to and including 2 inches			X
-over 2 inches		X	
f. Run-offs:			
(1) On joining seams, when resulting in an open seam score as an open seam.		X	
(2) On edge, top, or raise stitching when not resulting in an open seam (outside only):			
-over 1/2 inch to and including 1 inch			X
-over 1 inch		X	
g. Stitch or seam type not as specified		X	
h. Stitch tension: (Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in the lengthwise direction of seam or stitching)			
(1) Loose tension, resulting in a loose seam	X		
(2) Loose tension on edge, top, or raise stitching recognized by loosely exposed loops of top or lower thread.		X	
(3) Tight tension (stitches break when normal strain is applied to seam or stitching), score as open seam.		X	
i. Stitches per inch (to be scored only when the condition exists on major portion of seam or stitching):			
(1) Less than minimum number permitted:			
-one stitch		X	
-two or more stitches	X		
(2) Two or more stitches in excess of maximum number permitted			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

	Classification	
	Minor	
Major	A	B
j. Direction of seam laps:		
(1) Any seam not lapped as specified	X	
k. Staggered seams:		
(1) Crotch seam or armhole seam (measured from center of seam to center of seam):		
-over 1/2 inch up to and including 3/4 inch		X
-over 3/4 inch	X	
9. Shaded parts		
a. Badly shaded parts, affecting appearance (except hanger, undercollar, and underflaps)	X	

4.2.2.2 Defects applicable to specified parts. Defects applicable to specified parts shall be classified as follows:

	Classification	
	Minor	
Major	A	B
1. Collar (construction and setting)		
a. Topcollar twisted, seriously affecting appearance	X	
b. Topcollar puckered or full in width or length, affecting appearance	X	
c. Topcollar tight across width or length causing collar points to curl, affecting appearance	X	
d. Collar points poorly shaped or not of uniform shape, affecting appearance	X	
e. Collar points uneven in length by more than 1/4 inch	X	
f. Collar tight at joining to neck causing puckers or pleats on front or back, affecting appearance	X	
2. Front closure		
a. Snap fasteners (applying to all snap fasteners)		
(1) Missing, mismated, not securely clinched, or otherwise defective affecting function:		
-one fastener	X	
-both fasteners	X	
(2) One or both clinched too tightly, i.e., cutting surrounding material	X	
(3) Rough or sharp edges on one or more studs or sockets	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(4) One or both sockets out of alignment with stud, causing a noticeable bulge or twisted fronts		X	
b. Slide fasteners:			
(1) Missing or defective, affecting function	X		
(2) Not type or size specified		X	
(3) Slide-fastener tape set on too loosely or too tightly, causing noticeable bulging on tape or opening, affecting appearance		X	
(4) Stitched too close to metal chain, affecting function	X		
(5) The top end of slide-fastener tape not turned under on right front		X	
c. Thong:			
(1) Omitted on top slider	X		
(2) Ends uneven by 1/4 inch or more		X	
(3) Bartacks unequally spaced by 1/4 inch or more			X
(4) Under 6-1/2 inches or over 7-1/2 inches long			X
d. Protective fly:			
(1) Omitted	X		
(2) Quilting stitching: -omitted		X	
e. Base of closure twisted or poorly finished, affecting appearance		X	
3. Grommets			
a. Any omitted, broken, or not securely clinched to material	X		
b. Any sharp or rough edge	X		
c. Any too tightly clinched, cutting material	X		
d. Position:			
(1) Center of grommet off-center from waist seam: -over 1/16 inch to and including 1/8 inch			X
-over 1/8 inch		X	
(2) Center of grommet under 3-7/8 inches or over 4-1/8 inches			X
(3) Center of grommet under 3-7/8 inches or over 4-1/8 inches from the finished left front edge.			X
4. Hanger			
a. Omitted		X	
b. Center of hanger off-center with center back seam by more than 3/4 inch			X
c. Ends not securely caught in collar seam			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
5. Lapels and fronts			
a. Fronts puckered or twisted between front edge and stitching, seriously affecting appearance		X	
b. Lapel facings tight, short, or twisted, causing fullness or twist on fronts, affecting appearance		X	
c. Buttonholes:			
(1) Omitted	X		
(2) Button and buttonhole not corresponding in size so that they do not button properly	X		
(3) Buttonhole not caught in fabric causing stitches to pull away from material	X		
(4) End of buttonhole not securely tacked		X	
(5) One or more broken stitches		X	
(6) More than two skipped stitches			X
(7) Gimp omitted			X
(8) Not specified type or uncut bottonhole		X	
(9) Ragged edges			X
(10) Purling not finished on the facing side			X
d. Buttons:			
(1) Missing, loose, insecurely sewn, broken, or otherwise defective		X	
(2) Not specified type, size, or color		X	
(3) Position:			
-under 1/2 inch or over 3/4 inch from collar seam		X	
-under 2-3/8 inches or over 2-1/2 inches from front edge		X	
-not aligned with buttonhole, causing a noticeable bulge, affecting appearance		X	
6. Pockets and flaps			
a. General (applying to all pockets):			
(1) Set on crookedly or poorly shaped, affecting appearance		X	
(2) Garment part badly puckered or pleated at pocket joining seam, affecting appearance		X	
(3) Pocket corner not securely tacked		X	
(4) Raw edge of flap placed under 3/8 inch or over 5/8 inch from the top edge of pocket (applying to all flaps)			X
(5) Pile or hook tape omitted		X	
(6) Flap not covering front or back edge of pocket by 1/8 inch or more		X	
b. Tool pocket:			
(1) Not placed on the right back leg		X	
(2) Top edge not securely caught in bottom edge of hip pocket		X	
c. Pencil pocket:			
(1) Not placed on left sleeve			
(2) Stitching in center of pocket separating the compartments omitted		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
d. Breast pockets:			
(1) Top edges out of horizontal alignment by more than 1/2 inch		X	
e. Hip pockets:			
(1) Top edges of hip pockets out of horizontal alignment by 1/2 inch or more		X	
f. Side pockets and pass-through:			
(1) Bartack missing, insecure, or misplaced not serving intended purpose		X	
(2) Top of facing at waistband joining seam varying in width more than 1/2 inch		X	
(3) Top of pass-through at waistband joining seam varying in width more than 1/2 inch		X	
(4) Pass through opening shall not be less than six inches		X	
7. Sleeves			
a. Sleeves reversed	X		
b. Sleeve pleated or excessive fullness at armhole, affecting appearance		X	
c. Sleeve tight at armhole seam causing puckers on front or back, affecting appearance		X	
8. Sleeve and leg hem			
a. Outside of coveralls puckered, twisted, or pleated by stitching, forming hem affecting appearance		X	
b. Irregular in width by 1/4 inch or more			X
9. Waistband and drawstring			
a. Waistband:			
(1) Set on crookedly, affecting appearance		X	
(2) Irregular in width by more than 3/16 inch			X
(3) Top of waistband out of hoizontal alignment by more than 1/4 inch		X	
b. Drawstring:			
(1) Omitted	X		
(2) Ends not dipped in resin		X	
(3) Knot omitted			X
(4) Not specified type or color		X	

4.2.2.3 Finished measurement defects. Any finished measurement deviating from the finished measurements specified in Table II shall be classified as a finished measurement defect. Sleeve and leg inseam lengths uneven by 1/2 inch or more shall be classified as a finished measurement defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

4.2.3 Examination of preparation for delivery requirements. An examination shall be made to determine if packaging, packing, and marking requirements of Section 5 of this specification have been met. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 of MIL-STD-105, and the acceptable quality level shall be 2.5 defects per 100 units. Shipping containers fully prepared for delivery shall be examined for defects of closure and shall be scored as follows:

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, or inadequate stapling. Bulging or distortion of containers.
Content	Number per container is more or less than required.

4.3 Test methods. The methods of testing, wherever applicable, shall be in accordance with FED-STD-191. Unless otherwise specified, all requirements shall apply to the sample unit requirement.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each of the coveralls shall be laid flat, front up, and all fastenings shall be secured. The coveralls shall be folded so that the final fold measures approximately 14 inches by 11 1/2 inches. Four folded coveralls shall be neatly stacked in a bundle and securely cross-tied with cotton tape or twine (see 6.2.1).

5.1.2 Level C. Coveralls shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

* 5.2.1 Level A. Eight coveralls, packaged as specified in 5.1.1, shall be packed in a weather-resistant, size 2A box conforming to MIL-B-17757, assembled and closed, and reinforced as specified therein. The fiberboard for the liner shall conform to type CF, class domestic, variety SW, grade 275 of PPP-F-320. The packages shall be placed flat, two in length and one in depth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper. Toward the end of the contract or when there are less of the same size than the amount required per container, mixed sizes (see 5.2.4) may be packed within the same shipping container.

* 5.2.2 Level B. Eight coveralls, packaged as specified in 5.1.1, shall be packed in a domestic class, size 2A box conforming to MIL-B-17757 (except that the fiberboard for the container shall be grade 275), assembled and closed as specified therein. The fiberboard for the liner shall conform to type CF, class domestic, variety SW, grade 275 of PPP-F-320. The packages shall be placed flat, two in length and one in depth. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper. Toward the end of the contract or when there are less of the same size than the amount required per container, mixed sizes (see 5.2.4) may be packed within the same shipping container. When specified (see 6.2), shipping containers shall be fabricated from W5c or W5s fiberboard. in a manner to ensure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.2.3 Level C. Coveralls, packaged as specified in 5.1.2, shall be packed in a manner to ensure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.2.4 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side a white paper label, 5 inches by 4 inches, with the words "mixed sizes" plainly printed thereon and under those words shall be legibly printed the correct quantity and the sizes contained therein.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The coveralls are primarily intended for wearing apparel by flight alert crews and by personnel at missile launch sites.

6.2 Ordering data. Procurement documents should specify:

a. Title, number, and date of this specification.

b. Size and length required (see 1.1).

c. Selection of applicable levels of packaging and packing required (see 5.1 and 5.2).

d. Whether W-board shipping containers are required for level B shipments (see 5.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

6.2.1 The method of packaging referred to in 5.1.1 is similar to Method III of MIL-P-116.

6.3 Figure. Figure 1 shows general design and is for information only.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - GL
Air Force - 99

Review Activities:
Army - MD
DPSC - CT
Air Force - 99

Preparing Activity:
Air Froce - 99

Project No. 8405-0693

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

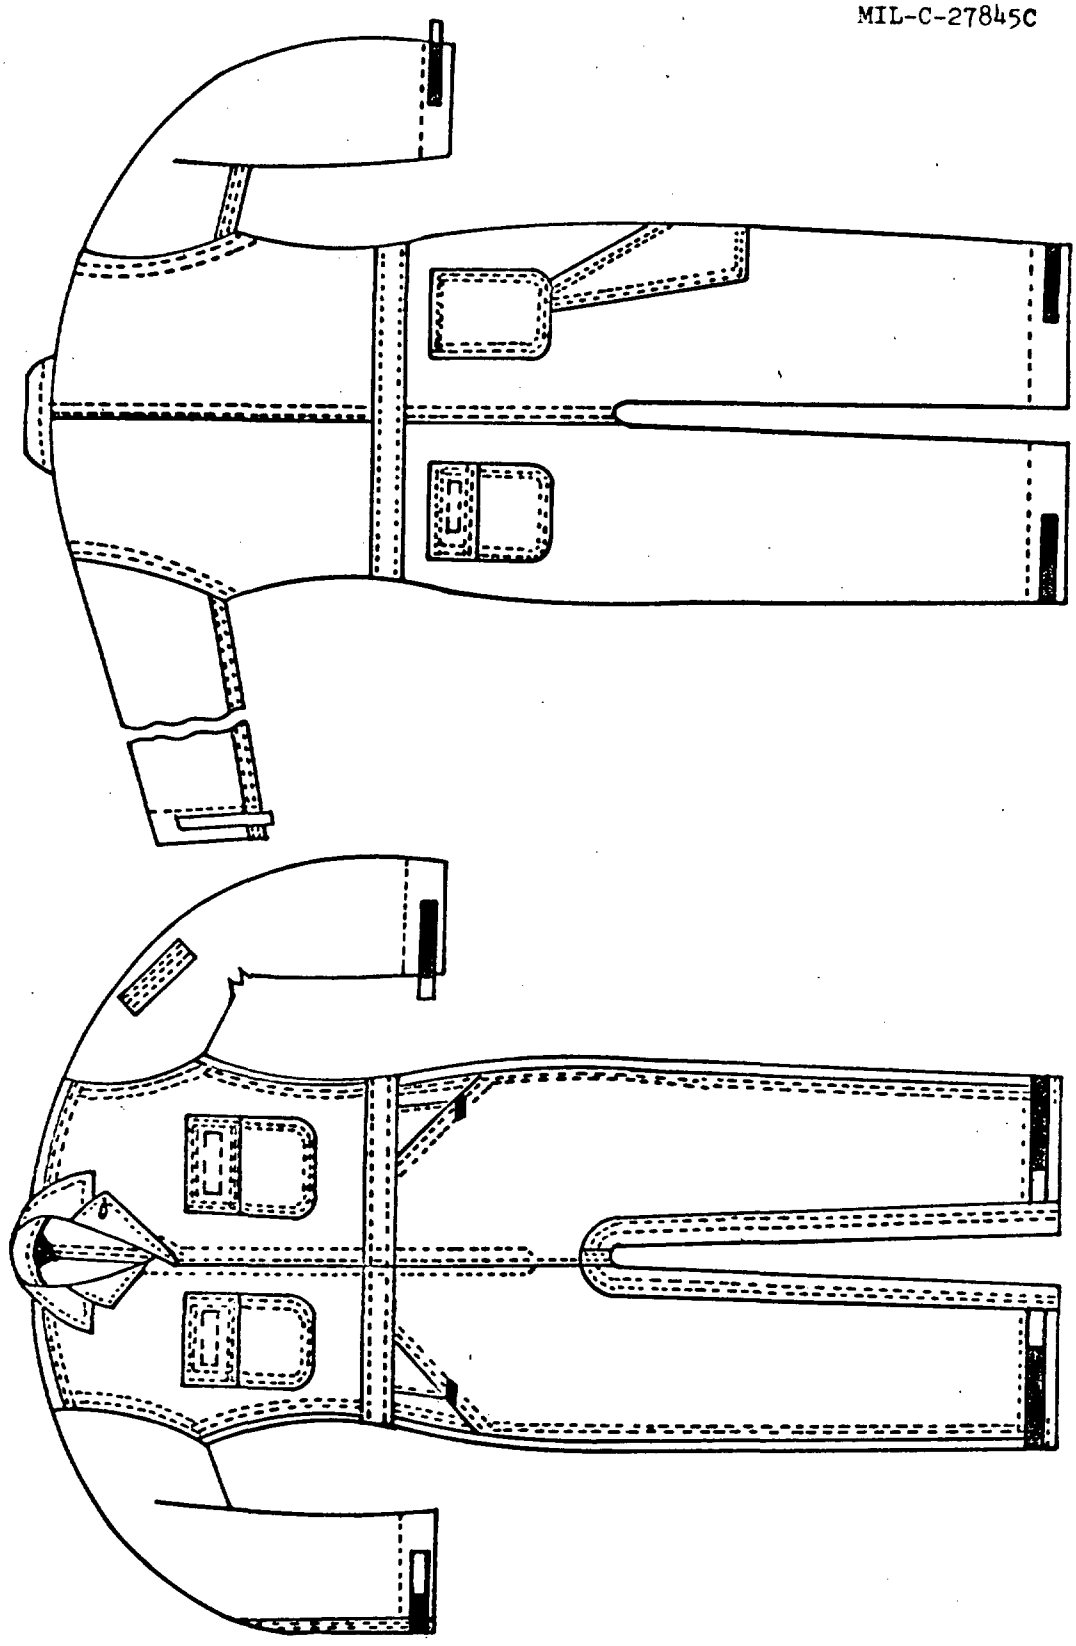


FIGURE 1 - Coveralls, men's CMU-3/P

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

AFLC CASO/LODS
FEDERAL CENTER
BATTLE CREEK, MI 49016

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:55Z
Check the source to verify that this is the current version before use.