
MILITARY SPECIFICATION SHEET

RELAY, TELEGRAPH, PASSIVE, SOLID STATE
(OCTAL BASE)


The complete requirements for procuring relays described herein shall consist of this document and the issue in effect of Specification MIL-R-27777.

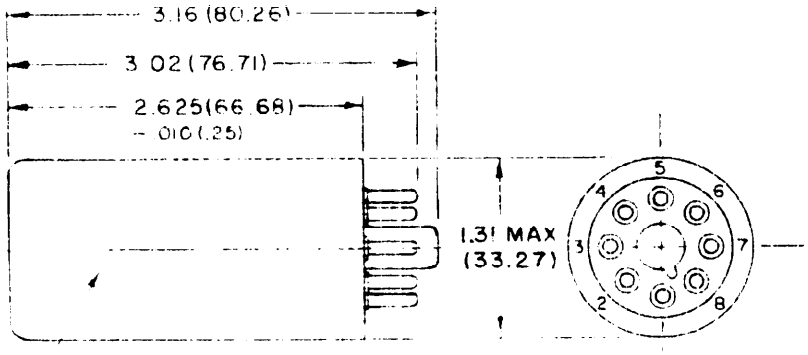

SEE NOTE 6


STANDARD OCTAL BASE

(NEUTRAL CONFIGURATION)



EQUIVALENT CIRCUIT DIAGRAM


INPUT
RED POSITIVE AND BLU NEGATIVE



ACTUAL CIRCUIT DIAGRAM


OUTPUT CONTINUITY
WH AND VIO

(UNIVERSAL CONFIGURATION)



EQUIVALENT CIRCUIT DIAGRAM

INPUT
RED POSITIVE AND BLU NEGATIVE
ORN POSITIVE AND YEL NEGATIVE



ACTUAL CIRCUIT DIAGRAM

OUTPUT CONTINUITY
WH AND VIO
WH AND GRN

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Millimeters are in parentheses.
4. Tolerances are .xx±.02 and .xxx±.005.
5. Relays shall be constructed in a manner to permit wiring changes to be compatable with communications-equipment wiring for which it is intended.
6. Marking of circuit diagram and part number on this surface.

(A) For changes, see pages 1, 2, and 4.

Source: https://assist.dla.mil -- Downloaded: 20260-20T12:51Z
Check the source to verify that this is the current version before use.

AMSC N/A. Approved for public release; distribution is unlimited.

REQUIREMENTS:

CONTACT DATA:

Load ratings:

Resistive (DC)	100 MA at 130 VDC, polar; 100 MA at 260 VDC, neutral.
(A) Voltage	260 VDC max.

Contact resistance:

(A) Open-contact resistance	25 megohms min.
Closed-contact resistance	30 ohms max at 100 MA.
(A) Input sensitivity:	
Operating	5 volts max output voltage drop with 20 MA input.
Nonoperating	250,000 ohms min output resistance with 10 MA input.
(A) Keying rate	1,200 baud max.
Bias distortion	1% max at 400 baud, 3% max at 1,200 baud.
Case-ground pin	See figure.

ELECTRICAL DATA:

Insulation resistance	500 megohms min at 500 VDC.
Dielectric withstanding voltage	500 V RMS 60 Hz.
Radio frequency interference	RFI tests of MIL-R-27777 are applicable.

ENVIRONMENTAL DATA:

Thermal shock	Applicable.
High and low temperature	Operating -10° C to +50° C; Nonoperating -55° C to +85° C.
Moisture resistance	Applicable.
Vibration	10 G, 10-2,000 Hz.
Shock	40 G.
Seal	Not applicable.

PHYSICAL:

Terminal strength	5 pounds.
(A) Weight	5 ounces max.
Dimensions and configuration	See figure and table I.
(A) Style	See table I.
Marking	See figure.

Source: https://assist.dla.mil -- Downloaded: 20260-20T12:51Z
Check the source to verify that this is the current version before use.

Wiring	Detail instructions shall be supplied with each relay, covering wiring changes for operation in all modes defined in MIL-R-27777 and shall include changing coil polarities.
Base	Standard octal (see figure).
LIFE TEST REQUIREMENTS	As specified in MIL-R-27777.
PART NUMBER	See table I.
(A) SUPERSESSION DATA	Relays specified herein are not interchangeable with those specified in the superseded specification sheet owing to a dimensional change. Present stock may be used until depleted.

(A) TABLE I.

Part number	Style	Type
M27777/1-001	C	Universal configuration (see figure)
M27777/1-002	C	Neutral configuration (see figure)

Custodians:
Army - EL
Navy - EC
Air Force - 17

Review activities:
Army - MU, EL, MI
Navy - SH, AS, OS
Air Force - 11, 13, 85, 89
DSA - ES

User activities:
Army - SM
Navy - MC, MO
Air Force - 19

Preparing activity:
Air Force - 17

(Project 5945-0117-1)

Source: https://assist.dla.mil -- Downloaded: 20260-20T12:51Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:51Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026\10-20T12:51Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
Department of the Air Force

Department of the Air Force
OFFICIAL BUSINESS

RADC (EMTS)
Griffiss AFB, NY 13440

FOLD

Source: https://assist.dla.mil -- Downloaded: 20260-20T12:51Z
Check the source to verify that this is the current version before use.