


MILITARY SPECIFICATION SHEET

RELAY, TELEGRAPH, PASSIVE, SOLID STATE, UNIVERSAL (202 BASE)

The complete requirements for procuring relays described herein shall consist of this document and the issue in effect of Specification MIL-R-27777.

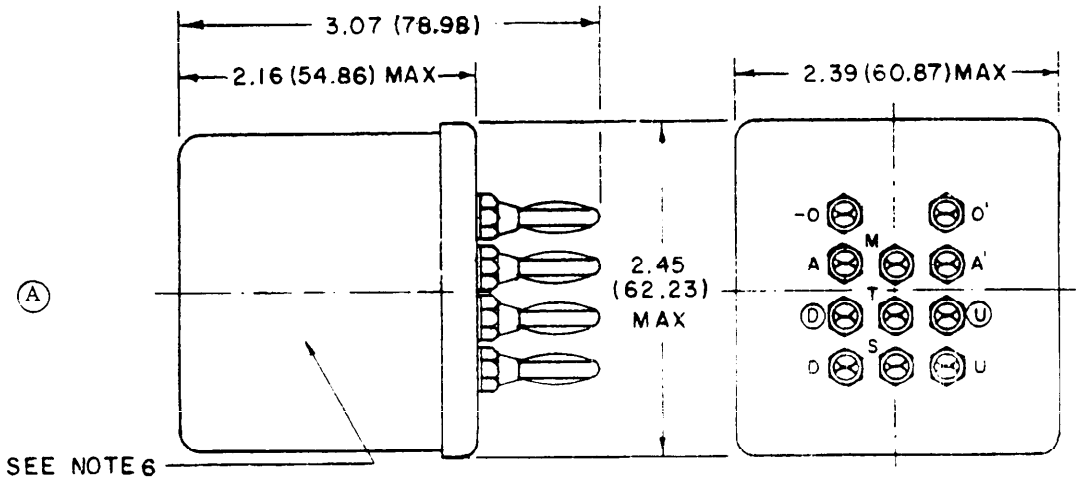

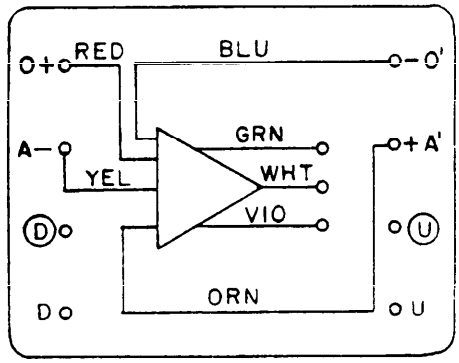

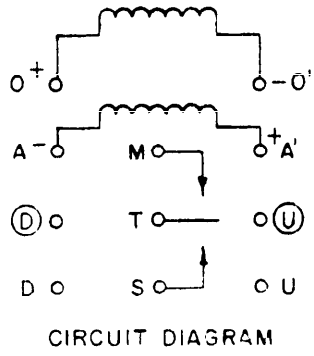

CIRCUIT DIAGRAM

INPUT	OUTPUT CONTINUITY
RED POSITIVE AND BLU NEGATIVE	WHT AND VIO
ORN POSITIVE AND YEL NEGATIVE	WHT AND GRN

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Millimeters are in parentheses.
4. Tolerance is .xx±.02.
5. Relays shall be constructed in a manner to permit wiring changes to be compatable with communications-equipment wiring for which it is intended.
6. Marking of circuit diagram and part number on this surface.

(A) For changes, see pages 1, 2, and 3.

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 202610-20T12:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CONTACT DATA:	
Load ratings:	
Resistive (DC)	100 MA at 130 VDC, polar; 100 MA at 260 VDC, neutral.
(A) Voltage	260 VDC max.
Contact resistance:	
(A) Open-contact resistance	25 megohms min.
Closed-contact resistance	30 ohms max at 100 MA.
(A) Input sensitivity:	
Operating	5 volts max output voltage drop with 20 MA input.
Nonoperating	250,000 ohms min output resistance with 10 MA input.
(A) Keying rate	1,200 baud max.
Bias distortion	1% max at 400 baud; 3% max at 1,200 baud.
Case-ground pin	Not applicable.
ELECTRICAL DATA:	
Insulation resistance	500 megohms min at 500 VDC.
Dielectric withstanding voltage	500 V RMS 60 Hz.
Radio frequency interference	RFI tests of MIL-R-27777 are applicable.
ENVIRONMENTAL DATA:	
Thermal shock	Applicable.
High and low temperature	Operating -10° C to +50° C; Nonoperating -55° C to +85° C.
Moisture resistance	Applicable.
Vibration	10 G, 10-2,000 Hz.
Shock	40 G.
Seal	Not applicable.
PHYSICAL:	
Terminal strength	5 pounds.
(A) Weight	10 ounces max.
Dimensions and configuration	See figure.
(A) Style	C
Marking	See figure.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T12:52Z
Check the source to verify that this is the currentversion before use.

Wiring	Detail instructions shall be supplied with each relay, covering wiring changes for operation in all modes defined in MIL-R-27777 and shall include changing coil polarities.
Base	"202" base (see figure).
LIFE TEST REQUIREMENTS	As specified in MIL-R-27777.
PART NUMBER	M27777/3-001

NOTE: INACTIVE FOR NEW DESIGN: TO BE USED FOR REPLACEMENT PURPOSES ONLY.

(A) SUPERSESSION DATA	Relays specified herein are interchangeable with those specified in the superseded specification sheet.

Custodians:
Army - EL
Navy - EC
Air Force - 17

Review activities:
Army - MU, EL, MI
Navy - SH, AS, OS
Air Force - 11, 13, 85, 89
DSA - ES

User activities:
Army - SM
Navy - MC, MO
Air Force - 19

Preparing activity
Air Force - 17

(Project 5945-0117-3)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T12:52Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:52Z
Check the source to verify that this is the current version before use.