MIL-V-27853B(ASG)
17 AUGUST 1966
Superseding
MIL-V-27853A(USAF)
20 June 1962

MILITARY SPECIFICATION

VALVE, FEMALE FILLER, LIQUID NITROGEN, NRU-2/E

This specification has been approved by the Department of the Air Force and by the Naval Air Systems Command.

1. SCOPE

1.1 This specification covers a liquid nitrogen, automatic closing, female filler valve designated NRU-2/E.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

L-P-378	Plastic Film, Polyethylene Thin Gage
O-T-236	Tetrachloroethylene, Perchloroethylene, Technical Grade
O-T-634	Trichloroethylene, Technical
BB-N-411	Nitrogen, Technical
PPP-B-566	Boxes, Folding, Paperboard
PPP-B-636	Box, Fiberboard
PPP-B-665	Boxes, Paperboard, Metal Stayed (Including Stay Material)
PPP-B-676	Box, Set-Up
PPP-C-843	Cushioning Material, Cellulosic

Military

MIL-P-116	Preservation, Methods of
MIL-P-7105	Pipe Threads, Taper, Aeronautical National Form, Symbol ANPT
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series: General Specification for
MIL-P-7936	Parts and Equipment, Aeronautical, Preparation for Delivery

FSC 3655

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

MIL-V-27852	Valve, Filler, Liquid Nitrogen NRU-1/A

STANDARDS

Military

MIL-STD-100	Engineering Drawing Practices
MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-831	Test Reports, Preparation of
MS33586	Metals, Definition of Dissimilar
MS33677	Fitting End, Taper Pipe Thread, Standard Dimensions for

DRAWINGS

Air Force

59C6671	Hose, Transfer - Liquid Oxygen, Assembly of

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

Uniform Classification Committee

Uniform Freight Classification Rules

(Application for copies of the above publication should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Ill., 60606.)

3. REQUIREMENTS

3.1 Qualification.- The valve furnished under this specification shall be a product which has been tested, and passed the qualification tests specified herein, and has been listed on or approved for listing on the applicable qualified products list.

3.2 Materials.- Materials shall conform to applicable specifications and shall be as specified herein. Materials which are not covered by applicable specifications, or which are not specifically described herein, shall be of the best quality, of the lightest practicable weight, and suitable for the purpose intended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

3.2.1 Corrosion resistance.- All metal parts shall be of corrosion-resistant material or material treated in a manner to render it adequately resistant to corrosion. Brass, bronze, phosphor bronze, corrosion-resistant steel of the 18-8 grade, and anodized aluminum alloy are considered satisfactory corrosion-resistant materials.

3.2.2 Dissimilar metals.- Unless suitably protected against electrolytic corrosion, dissimilar metals as defined in MS33586 shall not be used in intimate contact with each other.

3.2.3 Nonferrous materials.- Except for corrosion-resistant steel of the 18-8 grade and where ferrous materials are essential for adequate performance of the valve, nonferrous materials shall be used for all parts of the valve.

3.2.4 Nonmetallic materials.- Any nonmetallic material that is easily deteriorated or otherwise affected adversely by continued use with liquid nitrogen shall not be used.


3.2.5 Protective treatment.- Materials used in construction of the valve that are subject to corrosion in salt air, or other atmospheric conditions likely to occur during service usage, shall be protected against such corrosion in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of atmospheric conditions shall be avoided.

3.3 Design and construction.- The valve shall be an automatic closing valve designed to connect to and transfer liquid nitrogen through a valve conforming to MIL-V-27852. When the valve is connected to the MIL-V-27852 valve, it shall open and permit a flow of liquid nitrogen. When the valve is disconnected from the MIL-V-27852 valve, it shall close and prevent a flow of liquid nitrogen. It shall not be possible to open the valve by shock or jar. The valve shall be designed and constructed to withstand the strains, jars, vibration, and other conditions incident to service. The valve shall be designed to ensure smooth connection and performance as specified herein throughout a temperature range of -320° to 160° F. The valve shall be constructed to include a thermal shield or barrier that will insulate an unprotected hand from the deleterious effects of cryogenic temperatures. The outer sleeve of the valve shall be constructed from aluminum.

3.3.1 Configuration and dimensions.- The valve shall conform to the configuration and dimensions specified on figure 1.

3.3.2 Valve cap.- A valve cap designed to protect the mating portion of the valve shall be provided with the valve. The cap shall be attached to the valve with a suitable chain or linkage arrangement that will retain the cap during usage of the valve and will not interfere with the installation or removal of the cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

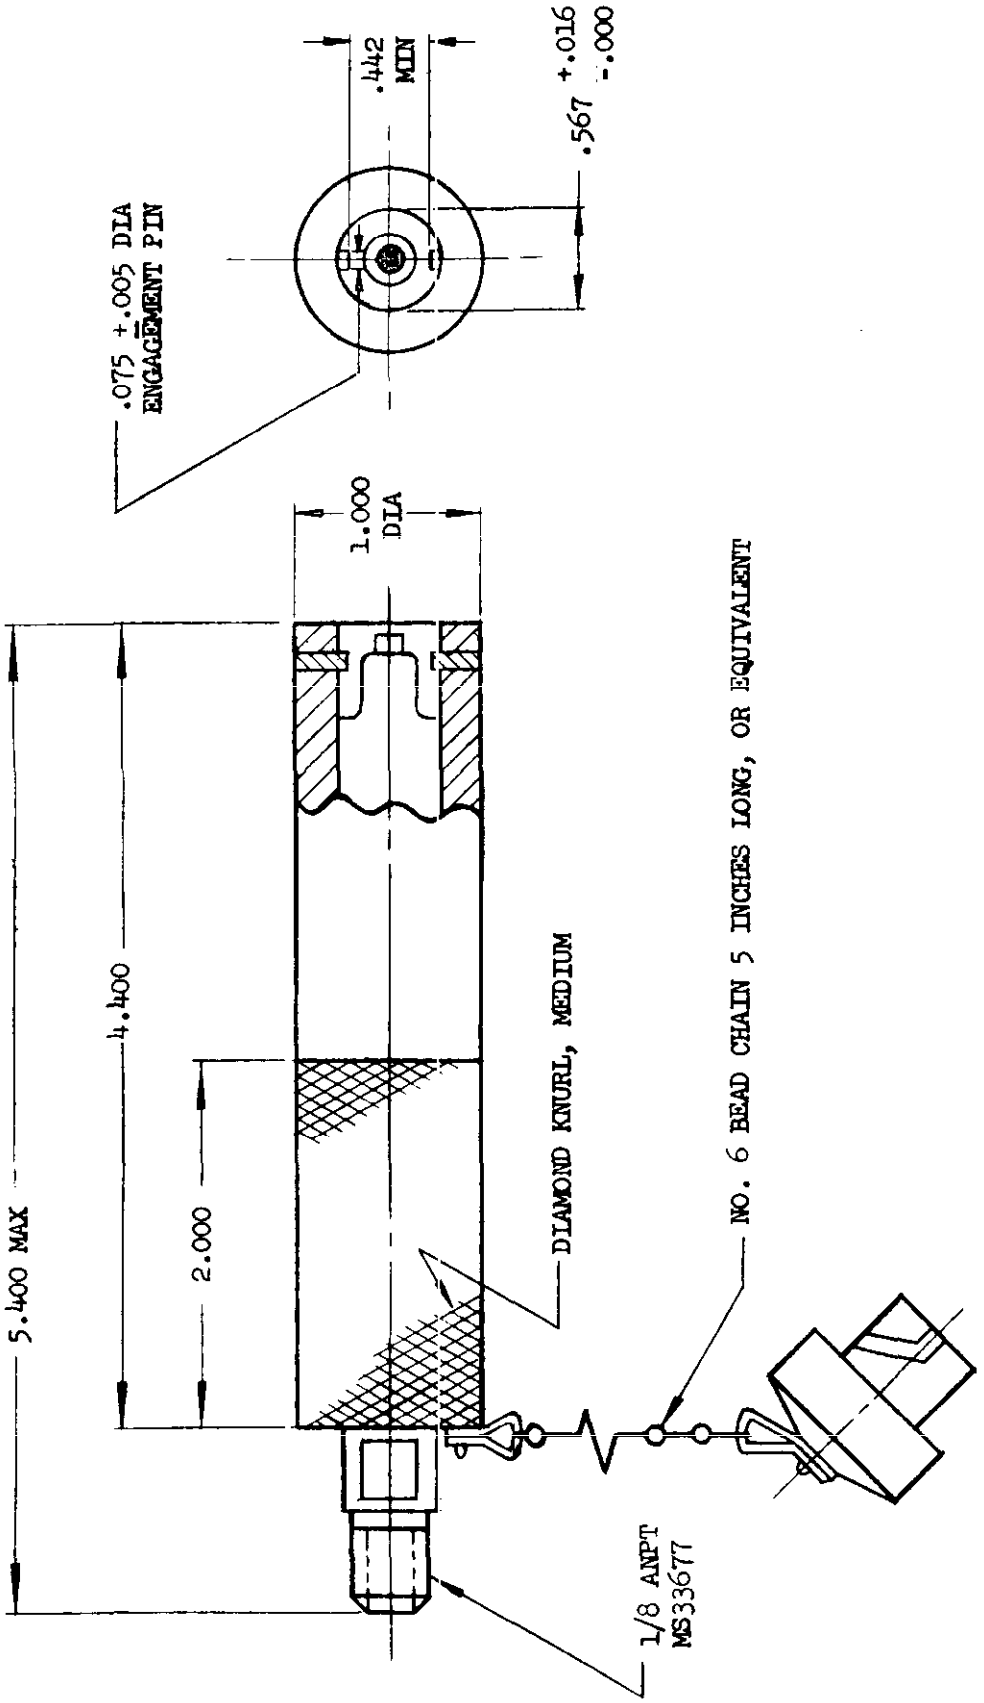

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE ±.016.

FIGURE 1. Valve

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

3.3.3 Threads.-

3.3.3.1 Screw threads.- Unless otherwise specified, machine screw threads shall conform to MIL-S-7742. The screws and nuts used in assembling the valve shall be securely locked by means of lockwashers, locknuts, or other suitable means.

3.3.3.2 Pipe threads.- Pipe threads shall be in accordance with MIL-P-7105.

3.3.4 Degreasing.- The valve shall be degreased using a vapor phase degreaser in accordance with O-T-236 or O-T-634. Ultrasonics may be used in conjunction with vapor phase degreasing for the cleaning of components. After completion of the cleaning and when assembled, General Electric type H leak detector or equivalent Halide testing apparatus shall be used to determine the absence of the cleaning compound.

3.3.5 Plugs.- All openings of the valve shall be closed with plugs or caps to prevent dust and foreign matter from entering the valve during shipping and storage. Plugs or caps shall be threaded to mate with the opening to be protected and may be constructed from a suitable plastic material or anodized aluminum.

3.4 Performance.-

3.4.1 Leakage.- When pressure is applied as specified in 4.6.3, leakage of the valve shall not exceed 0.02 liter per minute.

3.4.2 Connection, disconnection, and cap installation torques.- The torque required to connect and disconnect the valve to a valve conforming to MIL-V-27852 shall be not less than 10 nor more than 20 inch-pounds. The torque required to install and remove the valve cap shall be not less than 5 nor more than 20 inch-pounds.

3.4.3 High and low temperature.- The valve shall pass the high (160° F) and low (-65° F) temperature test specified in 4.6.5.

3.4.4 Extreme low temperature.- The valve shall function satisfactorily without leakage of liquid nitrogen when liquid nitrogen is transferred through the valve at a pressure of 30 psig. Leakage of the valve shall not exceed 0.02 liter per minute when the valve is returned to a temperature warmer than -65° F, during the test specified in 4.6.6.

3.4.5 Pressure drop.- When the valve is tested as specified in 4.6.7, the pressure drop across the mated assemblies shall not exceed 0.5 psig at a flow of 30 liters per minute or 1.1 psig at a flow of 50 liters per minute.

3.4.6 Vibration.- The valve shall pass the vibration test specified in 4.6.8.

3.4.7 Valve poppet endurance.- The valve shall pass the valve poppet endurance test specified in 4.6.9.

3.4.8 Valve cap endurance.- The valve shall pass the valve cap endurance test specified in 4.6.10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

3.4.9 Engagement endurance.- The valve shall pass the engagement endurance test specified in 4.6.11 with no indication of leakage.

3.4.10 Disassembly and examination.- The valve, when tested as specified in 4.6.12, shall not show any excessive deterioration or wear due to testing which might affect the valve performance.

3.5 Weight.- The total weight of the valve assembly shall not exceed 4.5 ounces.

3.6 Part numbering of interchangeable parts.- All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of MIL-STD-100 shall govern the manufacturer's part numbers and changes thereto.

3.7 Identification of product.- Each valve shall be permanently marked in accordance with MIL-STD-130 except that the Federal stock number shall be omitted from the nameplate.

3.8 Workmanship.- All parts of the valve assembly shall be manufactured in accordance with the highest grade commercial practice for this type equipment. Because of the nature of this equipment, all details of workmanship shall be of the highest quality to ensure proper functioning of the equipment.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection.- The examining and testing of the valve assembly shall be classified as:

(a) Qualification inspection: Qualification inspection consists of examinations and tests performed on samples submitted for approval as qualified products (see 4.3).

(b) Quality conformance inspection: Quality conformance inspections consists of examinations and tests performed on individual products or lots to determine conformance of the product or lot with the requirements set forth in this specification (see 4.4).

4.3 Qualification inspection.- Qualification inspection shall consist of all the examinations and tests specified herein except examination of preparation for delivery (4.6.13).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

4.3.1 Sample.- Qualification samples shall consist of two valves representative of the production valves. The samples shall be identified with the manufacturer's part number and such other information as required by the activity responsible for qualification.

4.3.2 Test report and test sample for the activity responsible for qualification (see 6.4).- The tests shall be conducted by the manufacturer or an approved testing facility and the following shall be furnished to the activity responsible for qualification:

(a) Test report: Three copies of a test report in accordance with MIL-STD-831 which shall include the results of all tests with a detailed statement as to compliance or non-compliance with each requirement of this specification, identified by paragraph number.

(b) Tested samples: The two samples that were tested.

4.4 Quality conformance inspection.- Quality conformance inspection shall consist of performing the examinations and tests listed in table I. Acceptance and rejection of individual valves and lot shall be in accordance with MIL-STD-105 under the acceptance criteria specified in table I.

4.4.1 Inspection lot.-

4.4.1.1 Valve assembly.- The lot size for valves shall be expressed in units of one valve assembly. The lot shall consist of valves manufactured under the same conditions, from the same material and components, and submitted for acceptance at the same time.

4.4.1.2 Preparation for delivery.- The lot size for inspection of preparation for delivery shall be expressed in units of one shipping container. The lot shall consist of the number of containers required to pack the lot of valves specified in 4.4.1.1 that has been prepared for shipment from the same materials and by the same process.

4.4.2 Sampling.- Samples shall be selected in accordance with MIL-STD-105 at the inspection level specified in table I. A sample unit for valves shall be one valve assembly. A sample unit for preparation for delivery shall be one shipping container, containing valves, that has been completely prepared for shipment, except the container need not be sealed.

4.5 Test conditions.-

4.5.1 Temperature and pressure.- Unless otherwise specified, tests shall be conducted at local ambient temperature and barometric pressure. The temperature and barometric pressure shall be recorded at the time of inspection. This information shall be available for computation of test data, where required, to normal temperature and pressure (NTP) conditions. NTP conditions are 29.92 inches of mercury and 70° F. Test instruments shall be calibrated or adjusted according to their required usage in conducting individual tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

4.5.2 Gas.- The high-pressure gas used in testing the valves shall be water-pumped nitrogen conforming to type I, class 1, grade B of BB-N-411,or water-pumped air equivalent in dryness to BE-N-411 nitrogen type I, class 1, grade B. Liquid nitrogen shall conform to type II, class 1, grade B of BB-N-411.

4.5.3 Testing sequence.- The tests shall be conducted in the sequence specified herein.

TABLE I. Quality conformance inspection, sample size, and acceptance criteria

Inspection	Sample size	Acceptance criteria
Examination of valve (4.6.1)	For critical defects - every valve 1/ For minor defects inspection level S-2	For critical defects - Reject all defective valves. For minor defects - AQL of 2.5 defects per 100 units.
Examination of dimensions and threads (4.6.2)	1/ Inspection level S-2	Acceptance number - zero. Rejection number - one.
Leakage (4.6.3) (Gas)	Every valve	Reject all defective valves.
Connection, disconnection and cap installation torque (4.6.4)	Every valve	Reject all defective valves.
Pressure drop (4.6.7)	1/ Inspection level S-1	Acceptance number - zero. Rejection number - one.
Preparation for delivery (4.6.13)	1/ Inspection level S-2	AQL of 4.0 percent defective.

1/ The sample size shall be based only on the sample size code letter corresponding to the specified inspection level of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

4.6 Inspection methods.-

4.6.1 Examination of valve.- The valve shall be carefully examined to determine conformance to this specification with respect to materials, workmanship, design, construction, marking, and degreasing. Defects shall be classified as specified in table II.

TABLE II. Classification of defects for visual examination of the valve assembly

Critical	Minor
1. Material imperfections - foreign matter embedded.	201. Marking - missing, insufficient, incorrect, illegible, or not permanent.
2. Surface - unclean, rough, misaligned, or containing cracks, nicks, or other flaws.	
3. Any component missing, malformed, fractured, or otherwise damaged.	
4. Any component loose or otherwise not securely retained.	
5. Incorrect assembling or improper positioning of components.	
6. Any functioning part that works with difficulty.	
7. Faulty workmanship or other irregularities.	

4.6.2 Examination of dimensions and threads.- The valve shall be examined to determine if the dimensions and threads are as specified herein.

4.6.3 Leakage (gas).- With the valve cap removed, a gas pressure of 150 psig shall be applied to the valve through the pipe fitting. The pressure shall be maintained for at least 1 minute. While the pressure is maintained, the leakage from the valve shall be measured.

4.6.4 Connection, disconnection, and cap installation torque.- The cap shall be installed and removed without the use of any lubricant. The torque required to install and remove the cap shall be measured. The valve shall be connected and disconnected (the poppet shall open) to a valve conforming to MIL-V-27852 without the use of lubricant. The torque required to connect and disconnect the two valves shall be measured.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

4.6.5 High and low temperature.- The valve shall be exposed to a temperature of 160° ±2° F for 4 hours. After this exposure and while retained at this temperature, the valve shall be subjected to and pass the tests specified in 4.6.3 and 4.6.4. The valve shall then be exposed to a temperature of -65° ±2° F for 4 hours. After this exposure and while retained at this temperature, the valve shall be subjected to and pass the tests specified in 4.6.3 and 4.6.4.

4.6.6 Extreme low temperature.- The valve shall be connected to a valve conforming to MIL-V-27852. A source of liquid nitrogen shall be connected to the pipe fitting and liquid nitrogen shall be transferred through the valves for at least 3 minutes under a pressure of 30 psig. While the liquid nitrogen is flowing the valves shall be rapidly disconnected. The 30 psig liquid nitrogen shall be maintained at the pipe fitting while the valves are disconnected. With the pressure maintained, the valve shall be reconnected to the MIL-V-27852 valve and the flow of liquid nitrogen resumed. The valve shall be visually inspected while connected and disconnected for any indication of leaks from the mating surfaces between the valves or any other portion of the valve. The connection, disconnection, reconnection, and inspection shall be performed at least twice during this test. After completing this test and when the valve is warmer than -65° F, the valve shall be subjected to and pass the tests specified in 4.6.3 and 4.6.4.

4.6.7 Pressure drop.- The valve shall be connected to a valve conforming to MIL-V-27852. A pressure of 30 psig shall be applied to the 1/8-inch ANTP fitting and the pressure drop across the two connected valves shall be measured.

4.6.8 Vibration.- The valve shall be vibrated for 3 hours, at 0.018 to 0.020 inch double amplitude, from 10 to 50 cps and back to 10 cps in approximately 1-minut periods. Upon completion of this test, the valve shall be subjected to and pass the tests specified in 4.6.3 and 4.6.4.

4.6.9 Valve poppet endurance.- The valve poppet shall be actuated 500 times. Upon completion of this cycling, the valve shall be subjected to and pass the tests specified in 4.6.3 and 4.6.4.

4.6.10 Valve cap endurance.- The valve cap shall be installed on the valve and removed 200 times. Upon completion of this cycling, the valve shall be subjected to and pass the tests specified in 4.6.3 and 4.6.4.

4.6.11 Engagement endurance.- The valve shall be connected to a valve conforming to MIL-V-27852 and disconnected 500 cycles. After completion of this cycling, the valve shall be subjected to and pass the test specified in 4.6.4. A hose conforming to Air Force Drawing 59C6671 shall then be connected to the pipe fitting end of the valve. The valve shall be connected to the MIL-V-27852 valve and the MIL-V-27852 valve shall be mounted in a horizontal position at a height of approximately 6 feet in a manner such that the entire weight of the hose is transmitted to the connection between the valves. Under these conditions, liquid nitrogen shall be transferred from the hose through the valves under a minimum pressure of 30 psig for at least 2 minutes. With the hose completely supported by the valve and the liquid nitrogen flowing, the valve and the mating surface between the valves shall be inspected for indication of leakage. The valve shall pass the requirements specified in 3.4.9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

4.6.12 Dissassembly and examination.- At the conclusion of all the inspections, the valve shall be disassembled and examined. The valve shall be disassembled and examined after any test in which valve failure indicates faulty construction. The valve shall meet the requirements specified in 3.4.10.

4.6.13 Examination of preparation for delivery.- The sample shipping containers and contents shall be examined to determine any nonconformance to the specified level of preservation, packaging, packing, marking, and for the existence of any defects listed in table III.

TABLE III. List of defects for preparation for delivery

Item	Defects
Exterior and interior markings	Missing, incorrect, incomplete, illegible; of improper size, location, sequence; or method of application; markings not the same on the interior and exterior containers.
Packaging and packing materials	Any nonconforming component; any component missing, damaged, or otherwise defective.
Exterior and interior weight or content	Number per container is more or less than required; gross or net weight exceeds the requirements.
Workmanship	Inadequate application of the components such as incomplete closure of the unit package, intermediate package, container flaps, loose strappings, etc.; bulging or distortion of the containers.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.- Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.- Each valve shall be preserved and packaged in accordance with Method III of MIL-P-116, cleaning shall be accomplished in accordance with Process C-1. Immediately after cleaning, the valve shall be enclosed within a polyethylene film bag, material conforming to L-P-378, type I, minimum thickness of 0.0015 inch. Excess air within the bag shall be expelled prior to effecting the closure. The bagged item shall then be cushioned with material conforming to PPP-C-843, type I, minimum thickness of 0.5 inch. Each cushioned valve shall be packaged within an individual, close fitting paperboard box, conforming to PPP-B-566, PPP-B-676, or PPP-B-665. The closure of the container shall be accomplished as prescribed in the appendix of the applicable specification.

5.1.2 Level C.- Each valve shall be individually packaged in a manner that will prevent damage and deterioration during transit from the supply source to the shipping point. The contractor's commercial packaging practice may be utilized when considered suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

5.2 Packing.- Packing shall be level A, B, or C, as specified by the procuring activity (see 6.2). Shipping containers shall effect a close fit, contain identical quantities and be of uniform dimensional configuration.

5.2.1 Level A.- Valves packaged as specified in 5.1.1 shall be packed for shipment in fiberboard shipping containers, conforming to PPP-B-636, style RSC, grade V3c or grade V3s. The gross weight and dimensional limitations of the shippers shall be as prescribed in table II. The container closure, waterproofing and reinforcement shall be accomplished in accordance with "Class weather-resistant boxes", "Waterproofing of slotted style boxes", and "Reinforcement for class weather-resistant boxes of the appendix to PPP-B-636.

5.2.2 Level B.- Valves packaged as specified in 5.1.1 shall be packed for shipment in fiberboard shipping containers conforming to PPP-B-636, style RSC, class domestic, minimum grade 200. The gross weight and dimensional limitations of the shippers shall be as prescribed in table I (Special Requirements) of PPP-B-636. The container closure shall be accomplished in accordance with Method II for "Class domestic boxes" of the appendix to PPP-B-636.

5.2.3 Level C.- Valves packaged as specified shall be packed for shipment in a manner that will afford protection against damage during transit from the supply source to the shipping point. The pack shall comply with the rules and regulations applicable to the commodity and mode of transportation utilized.

5.3 Physical protection.- Cushioning and testing to determine adequacy as required, shall be in accordance with applicable requirements of MIL-P-7936. The dr tests of MIL-P-7936 will not be required when the level of packing is level C.

5.4 Marking.- Interior and exterior containers shall be marked in accordance with MIL-STD-129. The nomenclature shall be:

"VALVE, FEMALE FILLER, LIQUID NITROGEN, NRU-2/E"

6. NOTES

6.1 Intended use.- The valve is intended to be used on liquid nitrogen ground servicing equipment to connect the ground servicing equipment to liquid nitrogen systems installed in aircraft to fill the aircraft systems.

6.2 Ordering data.- Procurement documents should specify:

(a) Title, number, and date of this specification.
(b) Applicable levels of preservation, packaging, and packing (see 5.1 and 5.2).
(c) Items of data required (see 6.3).

6.3 Data.- For the information of contractors and contracting officers, any of the data specified in applicable documents listed in section 2 of this specification or referenced lower-tier documents need not be prepared for the Government and need not be furnished to the Government unless specified in the contract or order. The data to be furnished will be listed on DD Form 1423 (Contractor Data Requirements List), which will be attached to and made a part of the contract or order. NavWeps Form 4200/15 (Drawings, Lists, and Specifications Required) will be attached where applic

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

6.4 Qualification.- With respect to products requiring qualification, awards will be made only for such products as have, prior to the time set for opening of bids, been tested and approved for inclusion in the applicable Qualified Products List, whether or not such products have actually been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Systems Engineering Group (SEG), Attn: SEMCE, Wright-Patterson Air Force Base, Ohio 45433, and information pertaining to qualification of products may be obtained from that activity.

6.5 International standardization agreement.- The mating requirements (3.3, 3.4.5, and figure 1) of this specification are the subject of International Standardization Agreement ASCC Air Std. 14/12 (STANAG 3547). When amendment, revision, or cancellation of this specification is proposed, the departmental custodians will inform their respective Departmental Standardization Offices so that appropriate action may be taken respecting the international agreement concerned.

Custodians:
Navy - AS
Air Force - 11

Preparing activity:
Air Force - 11

Reviewer activities:
Navy - AS
Air Force - 11, 68

International interest (see 6.5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use

FOLD

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY

DEFENSE SUPPLY AGENCY
OFFICIAL BUSINESS

Aeronautical Standards Group (ASG)

8719 Colesville Rd.

Silver Spring, Md. 20910

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION
MIL-V-27853B(ASG) Valve, Female Filler, Liquid Nitrogen, NRU-2/E

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A
☐ Direct Government Contract ☐ Subcontract

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO IF "YES" IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.)

SUBMITTED BY (Printed or typed name and activity) DATE

DD Form 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:56Z
Check the source to verify that this is the current version before use.