INCH-POUND
MIL-F-50454B(AR)
27 January 1995
SUPERSEDING
MIL-F-50454A(AR)
19 March 1973

MILITARY SPECIFICATION

# FUZE, GRENADE M219A1 AND M219A2 LOADING, ASSEMBLING AND PACKING

This specification is approved for use by the U.S. Army Armament, Research, Development and Engineering Center, and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the requirements, examination and tests for the loading, assembling and packing of two types of fuzes designated as Fuze, Grenade, M219A1 and M219A2. (See 6.1)

## 2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use to improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: AMSTA-AR-EDE-S, Picatinny Arsenal, New Jersey 07806-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

**AMSC N/A** FSC 1375

**DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

QQ-P-416 - Plating, Cadmium (Electrodeposited)

MILITARY

MIL-D-14978 - Detonator, Stab, M55, Loading, Assembling and Packing
MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification for

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-331 - Fuze and Fuze Components, Environmental and Performance Tests For
MIL-STD-410 - Nondestructive Testing Personnel
MIL-STD-453 - Inspection, Radiographic

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from DODSSP - Customer Service, Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS (See 6.4)

US ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

PRODUCT DRAWINGS

9207967 - Cover
9207971 - Fuze, Grenade, M219A1
9332611 - Fuze, Grenade, M219A2



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

PACKAGING DRAWINGS

| | |
|---|---|
| 8882317 | - Support, Packing, Ammunition for Fuze, Grenade: M218, M219, M219A1, XM224 or M219A2 |
| 8882318 | - Box, Packing, Ammunition for Fuze, Grenade: M218, M219, M219A1 XM224 or M219A2 |

(Copies of other Government documents, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

(The Code of Federal Regulations is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402. Orders should specify, 49 CFR 100-199 latest revision.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

| | |
|---|---|
| ASTM B-633 | - Specification for Electrodeposited Coatings of Zinc on Iron and Steel |

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained. (See contract provisions for additional precedence criteria).

3. REQUIREMENTS

3.1 Material. Materials shall be in accordance with the applicable drawings, specifications and standards. Certificates of Conformance shall be included with all inspection quantities.



Source: https://assist.dla.mil -- Downloaded: 202640-26T04:02Z
Check the source to verify that this is the current version before use.

3.2 Parts. The fuze parts and assemblies shall comply with all requirements specified on Drawings 9297971 and 9332611 and with all requirements specified in applicable specifications. Packaging shall comply with all requirements specified on Drawings 8882317 and 8882318 and with all requirements specified in applicable specifications.

3.3 Arming of housing assembly. The housing assembly, less detonator, shall arm before reaching 3201 revolutions per minute (RPM) when rotated about its longitudinal axis and tested as specified in 4.5.3.

3.4 Non-arming of housing assembly. The housing assembly, less detonator, shall not arm when spun on its axis to a spin velocity of 2400 revolutions per minute (RPM) and tested as specified in 4.5.4.

3.5 Verification of non-arming of housing assembly. After the housing assembly, less detonator, has been subjected to the non-arming test in 4.5.4, it shall not arm or partially arm 1/ if spun again on its axis to a spin velocity of 2300 revolutions per minute (rpm), when tested as specified in 4.5.5.

3.6 Staking of firing pin assembly. The firing pin shall not separate or become loose from the firing pin spring when a minimum pull of two hundred (200) grams is applied as specified in 4.5.6.

3.7 Staking of detonator. The detonator shall not move a distance greater than that specified on the applicable drawing, when tested and subjected to the force specified on that drawing. There shall be no visual evidence of torn, ruptured or above flush detonator cases when tested as specified in 4.5.7.

3.8 X-ray examination of sample fuze assemblies prior to jolt and jumble tests. The fuze assembly samples for the jolt and jumble tests shall be x-rayed and shall not be armed or partially armed 1/ when tested as specified in 4.4.3.7.

3.9 Jolt. The fuze assembly shall withstand the jolt test without having any explosive elements explode, fuze come apart, fuze partially arm 1/ or fuze arm when tested as specified in 4.5.9.

3.10 Jumble. The fuze assembly shall withstand the jumble test without having any explosive elements explode, fuze come apart, fuze partially arm 1/ or fuze arm when tested as specified in 4.5.10.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

3.11 Waterproofness. The fuze assembly shall withstand the waterproofness test without emitting a continuous stream of air bubbles when tested as specified in 4.5.11.

3.12 Transportation vibration. The fuze assembly shall withstand the transportation vibration test without having any explosive elements explode, fuze come apart, fuze partially arm 1/ or fuze arm when tested as specified in 4.5.12.

3.13 Salt spray. The contractor shall prepare plated covers of the same material in accordance with Dwg. 9207967. The salt spray requirements noted on Dwg. 9207967 shall be met when tested as specified in 4.5.2.

3.14 Functioning of fuze assembly. The fuze assembly shall function satisfactorily on contact with the impact medium. Functioning will be evidenced by initiation of the Detonator and Lead Cup when tested as specified in 4.5.13.

3.15 X-ray examination of fuze assemblies prior to packing and shipping. All fuze assemblies shall be x-rayed for the critical defect of an armed fuze. X-ray procedure shall verify that the detonator rotor is not in the armed or partially armed 1/ position, that no components are missing and that no foreign material is present when tested as specified in 4.4.3.13.

NOTE: This final x-ray examination is mandatory for contractors employing any hand assembly/operations in their fuze manufacturing process.

1/ NOTE: A "partially armed" unit is one in which two (2) or more adjacent lockweights are not locked in the detonator rotor. A lockweight is considered unlocked when the corner of the lockweight against the rotor is displaced a distance from the rotor to permit insertion of a .030 inch round pin." This will be determined on x-ray by the use of a .030" diameter circle or other suitable means. This definition applies only to radiographs of aluminum housing fuzes (P/N 9207971-1). Partially armed zinc housing fuzes (P/N 9207971-2) are distinguishable on a radiograph by marked lack of parallelism of the outer edge of two or more adjacent lockweights and the back edge of their respective pockets. This may be verified by placing on the fuze image a transparent overlay on which is drawn a slot at least 1/4" long by .045" in width, superimposing the outer side of the .045" slot with the back edge of the rotor housing pocket and observing if any portion of the lockweight image falls within the .045" slot.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the currentversion before use.

3.16 Submission of results of contractor-conducted examinations and tests. The contractor shall forward copies of the results of any of his examinations or tests to the designated address as required by the contract, the specification, or as requested by the Contracting Officer. (see 6.6)

3.17 First article inspection. This specification contains provisions for first article testing. Requirements for submission of first article samples by the contractor shall be as specified in the contract.

3.18 Workmanship. The fuze parts and assemblies shall be fabricated and loaded in a thorough, workmanlike manner. They shall be free of burrs, sharp edges, cracks, dirt, rust and other foreign matter. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agent. Exterior surface coatings shall be continuous except for a few light scratches not exposing base material. Base metal visible, except that exposed by flaking, on the cover (P/N 9207967) caused by normal process machine operations is acceptable. All required markings shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

4.1.2 General provisions. Unless otherwise specified herein, the provisions of MIL-A-48078 apply and form a part of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.1.3 Submission of product. At the time the completed lot of items deliverable under the contract is submitted to the Government for acceptance, the contractor shall supply the following information accompanied by a certificate which attests that the information provided is correct and applicable to the product being submitted:

a. A statement that the lot complies with all the quality assurance provisions specified in this specification.

b. Drawing and specification number and date, together with identification and date of changes thereto.

c. A statement that all material purchased by the contractor meets requirements, when such material is controlled by Government or commercial specifications referenced in any of the contractual documents, and that certificates of conformance are on file and available for review.

d. Number of items in the lot.

e. Date submitted.

The certificate shall be signed by a responsible agent of the certifying organization. The initial certificate submitted shall be substantiated by evidence of the agent's authority to bind his principal. Substantiation of the agent's authority will not be required with subsequent certificates unless, during the course of the contract, this authority is vested in another agent of the certifying organization.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)

b. Quality conformance inspection (see 4.4)



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the assemblies, components, and test specimens listed in Table I in the quantities indicated.

a. Ten (10) plated covers, P/N 9207967.
b. Two hundred fifty (250) housing assemblies, P/N 9215195 less detonator.
c. Eighty (80) firing pin assemblies, P/N 8833557.
d. Eighty (80) housing assemblies, P/N 9215195.
e. Six hundred and eighty seven (687) fuze assemblies, P/N 9332611.
f. One hundred twenty-five (125) fuze assemblies, less lead cup assembly and housing seal, P/N 9332611
g. Fifty (50) rotor and spring assemblies, P/N 9215196.
h. Fifty (50) rotor and housing assemblies, P/N 9215194.
i. Fifty (50) of each metal part.

NOTE: For die-cast parts, five (5) parts from each cavity or for stamped parts, five (5) parts from each tool shall be supplied in lieu of the fifty (50) of each metal part mentioned above.

All parts and completed assemblies submitted shall have been produced by the contractor (or furnished by a supplier) using the same production processes, procedures and equipment as will be used in fulfilling the contract. All parts and materials, including packaging and packing, shall be obtained from the same sources of supply as will be used in regular production. The sample shall be accompanied by certificates of conformance. A first article quantity, or portion thereof, as directed by the Contracting Officer, shall also be submitted whenever there is a lapse in production for a period in excess of 90 days, or whenever a change occurs in manufacturing process (including heat treatment procedures and equipment, material used, drawing specification or source of supply as to significantly affect product uniformity as determined by the Government. Prior to submission, the contractor shall inspect the sample to the degree necessary to assure that it conforms to the requirements of the contract and submit a record of this inspection with the sample. A sample containing known defects will not be submitted unless specifically authorized by the Contracting Officer.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.3.2 Inspections to be performed. As determined by the Government, the first article assemblies, components, and test specimens may be subjected to any or all of the examinations and tests specified in this detail specification and be inspected for compliance with any or all requirements of the applicable drawings. (See MIL-A-48078 and Table I herein)

4.3.3 Rejection. If any assembly, component, or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The accept/reject criteria for the function test is specified in Table II. The Government reserves the right to terminate inspection upon any failure of an assembly, component, or test specimen to comply with any of the requirements. (See MIL-A-48078)



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

MIL-F-50454B(AR)

## CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE<br>Fuze, Grenade, M219A1 and M219A2 | SHEET 1 OF 1 | | DRAWING NUMBER<br>9207971/9332611 |
|---|---|---|---|---|
| | | | | NEXT HIGHER ASSEMBLY |
| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
| | Salt spray | 10-0-1 | 3.13 | 4.4.3.1 |
| | Arming of housing assembly | 125-0-1 | 3.3 | 4.4.3.2 |
| | Non-arming of housing assembly | 125-0-1 | 3.4 | 4.4.3.3 |
| | Verification of non-arming of housing assembly | 125-0-1 | 3.5 | 4.4.3.4 |
| | Staking of firing pin assembly | 80-0-1 | 3.6 | 4.4.3.5 |
| | Staking of detonator | 80-0-1 | 3.7 | 4.4.3.6 |
| | X-ray examination of fuze assemblies prior to jolt and jumble tests | Jolt: 12-0-1<br>Jumble: 125-0-1 | 3.8 | 4.4.3.7 |
| | Jolt test | 12-0-1 | 3.9 | 4.4.3.8 |
| | Jumble test | 125-0-1 | 3.10 | 4.4.3.9 |
| | Waterproofness test | 50-0-1 | 3.11 | 4.4.3.10 |
| | Transportation vibration test | 500-0-1 | 3.12 | 4.4.3.11 |
| | Functioning of fuze assembly | 500-0-1 | 3.14 | 4.4.3.12 |

NOTES:

AMSMC Form 1570b, 1 Jul 89

Replaces 1570, 1 Feb 85, which may not be used



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications, and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

a. Classification of characteristics. Quality conformance examinations and tests are specified in the following Classification of Characteristics paragraphs. The contractor's quality program or detailed inspection system shall provide assurance of compliance of all characteristics with the applicable drawing and specification requirements utilizing as a minimum the conformance criteria specified. When cited herein, attributes sampling inspection shall be conducted in accordance with Table II, using the inspection levels stated in the Classification of Characteristics paragraphs.


Source: https://assist.dla.mil -- Downloaded: 202640-26T04:02Z
Check the source to verify that this is the current version before use.

TABLE II. Attributes sampling inspection.

| | Inspection Levels | | | | | |
|---|---|---|---|---|---|---|
| Lot Size | I | II | III | IV | V | VI |
| 2 to 8 | * | * | * | * | 5 | 3 |
| 9 to 15 | * | * | * | 13 | 5 | 3 |
| 16 to 25 | * | * | * | 13 | 5 | 3 |
| 26 to 50 | * | * | 32 | 13 | 5 | 3 |
| 51 to 90 | * | * | 32 | 13 | 13 | 5 |
| 91 to 150 | * | 125 | 32 | 13 | 13 | 5 |
| 151 to 280 | * | 125 | 32 | 32 | 20 | 8 |
| 281 to 500 | * | 125 | 32 | 32 | 20 | 8 |
| 501 to 1200 | * | 125 | 80 | 50 | 20 | 13 |
| 1201 to 3200 | 1250 | 125 | 80 | 50 | 32 | 13 |
| 3201 to 10000 | 1250 | 125 | 125 | 50 | 32 | 13 |
| 10001 to 35000 | 1250 | 315 | 125 | 80 | 50 | 13 |
| 35001 to 150000 | 1250 | 315 | 125 | 80 | 50 | 13 |
| 150001 to 500000 | 1250 | 315 | 200 | 125 | 50 | 13 |
| 500001 and over | 1250 | 315 | 200 | 125 | 50 | 13 |

Numbers under inspection levels indicate sample size; asterisks (*) indicate one hundred percent inspection. If sample size exceeds lot size, perform one hundred percent inspection. Accept on zero and reject on one or more for all inspection levels.

b. Alternative quality conformance provisions. Unless otherwise specified herein or provided for in the contract, alternative quality conformance procedures, methods, or equipment, such as statistical process control, tool control, variables sampling or other types of sampling plans, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions herein. Prior to applying such alternative procedures, methods, or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation (see 6.7). When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality conformance provision(s) herein. In case of dispute as to whether the contractors proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor quality program or inspection system, as applicable.



Source: https://assist.dla.mil -- Downloaded: 202640-26T04:02Z
Check the source to verify that this is the current version before use.

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.1 | Fuze, Grenade, M219A1/M219A2, Prior to Assembly of Housing Seal and Lead Cup Assembly | 1 OF 1 | 9207971/9332611 |
| | | | NEXT HIGHER ASSEMBLY: --- |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical 1 | Detonator rotor not in safe position | Level I | 3.2 | 4.5.14 |
| Major | None defined | | | |
| Minor 201 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.2 | Fuze, Grenade, M219A1/M219A2, Prior to Assembly of Housing Seal | 1 OF 1 | 9207971/9332611 |
| | | | NEXT HIGHER ASSEMBLY --- |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major 101 | Lead cup assembly or charge missing | Level II | 3.2 | Visual |
| Minor 201 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.3 | Fuze, Grenade M219A1/M219A2, Prior to Assembly of Asphalt Sealant, Lead Cup and Housing Seal | 1 OF 1 | 9207971/9332611 |
| | | | NEXT HIGHER ASSEMBLY --- |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical 1 | Absence of one (1) or more lockweight spring(s) | Level I | 3.2 | Test |
| Major | None defined | | | |
| Minor 201 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:

AMSMC Form 1570b, 1 Jul 89

Replaces 1570, 1 Feb 85, which may not be used



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.4 | Fuze, Grenade, M219A1/M219A2 | 1 OF 1 | 9207971/9332611 |
| | | | NEXT HIGHER ASSEMBLY |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major | | | | |
| 101 | Outside diameter, max. at lead cup end | Level II | 3.2 | Gage |
| 102 | Outside diameter, max. on largest diameter | Level II | 3.2 | Gage |
| 103 | Outside diameter, max. on diameter of end, opposite to lead cup | Level II | 3.2 | Gage |
| 104 | Length of shoulder, max. | Level II | 3.2 | Gage |
| 105 | Length, max. | Level II | 3.2 | Gage |
| 106 | Height, max. of dimple | Level II | 3.2 | Gage |
| Minor | | | | |
| 201 | Marking misleading or unidentifiable | Level IV | 3.2 | Visual |
| 202 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.5 | Box, Inner, Prior to Inserting Supports | 1 OF 1 | 8882317/8882318 |
| | | | NEXT HIGHER ASSEMBLY |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major | None defined | | | |
| Minor | | | | |
| 201 | Lower outer flaps not sealed | Level IV | 3.2 | Visual |
| 202 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:

AMSMC Form 1570b, 1 Jul 89

Replaces 1570, 1 Feb 85, which may not be used



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.6 | Support, Prior to Inserting into Inner Box | 1 OF 1 | 8882317/8882318 |
| | | | NEXT HIGHER ASSEMBLY |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major | | | | |
| 101 | Support not closed | Level II | 3.2 | Visual |
| 102 | Absence of radius on lid corners | Level II | 3.2 | Visual |
| Minor | | | | |
| 201 | Support damaged | Level IV | 3.2 | Visual |
| 202 | Incorrect number of fuzes | Level IV | 3.2 | Visual |
| 203 | Pad missing | Level IV | 3.2 | Visual |
| 204 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:



AMSMC Form 1570b, 1 Jul 89

Replaces 1570, 1 Feb 85, which may not be used

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.7 | Box, Inner, Prior to Sealing Outer Flaps | 1 OF 1 | 8882318 |
| | | | NEXT HIGHER ASSEMBLY |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major | None defined | | | |
| Minor | | | | |
| 201 | Incorrect number of supports | Level IV | 3.2 | Visual |
| 202 | Supports improperly oriented | Level IV | 3.2 | Visual |
| 203 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.8 | Box, Inner, Sealed | 1 OF 1 | 8882318 |
| | | | NEXT HIGHER ASSEMBLY |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major | | | | |
| 101 | Box damaged | Level II | 3.2 | Visual |
| 102 | Box improperly sealed | Level II | 3.2 | Visual |
| 103 | Contents loose | Level II | 3.2 | Visual |
| Minor | | | | |
| 201 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.9 | Box, Outer, Sealed | 1 OF 1 | 8882318 |
| | | | NEXT HIGHER ASSEMBLY |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical | None defined | | | |
| Minor | | | | |
| 101 | Box damaged | Level II | 3.2 | Visual |
| 102 | Box improperly sealed | Level II | 3.2 | Visual |
| 103 | Contents loose | Level II | 3.2 | Visual |
| Major | | | | |
| 201 | Marking misleading or unidentifiable | Level IV | 3.2 | Visual |
| 202 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.10 | Housing Assembly, Prior to Assembly of Detonator | 1 OF 1 | 9215195 |
| | | | NEXT HIGHER ASSEMBLY |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical 1 | Detonator rotor not locked in unarmed position | Level I | 3.2 | Machine Probe (See 4.5.1) |
| Major | None defined | | | |
| Minor 201 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.11 | Rotor, Detonator (Applicable to M219A2 Only) | 1 OF 1 | 9223676 |
| | | | NEXT HIGHER ASSEMBLY |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major 101 | Lubricant missing | Level II | 3.2 | Visual |
| Minor 201 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

## QUALITY CONFORMANCE INSPECTION

## CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.12 | Spring, Rotor (Applicable to M219A2 Only) | 1 OF 1 | 9229736 |
| | | | NEXT HIGHER ASSEMBLY 8833570 |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major | | | | |
| 101 | Loads at compressed lengths | Level II | 3.2 | Test |
| 102 | O.D. at compressed length (max.) | Level II | 3.2 | Gage |
| 103 | End(s) not closed and squared | Level II | 3.2 | Visual |
| 104 | End configuration improper (Note 12) | Level II | 3.2 | Visual |
| Minor | | | | |
| 201 | Solid height (max.) | Level IV | 3.2 | Gage |
| 202 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.13 | Spring, Weight Centering (Applicable to M219A2 Only) | 1 OF 1 | 9207969 |
| | | | NEXT HIGHER ASSEMBLY 9207971 |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major | | | | |
| 101 | Loads at compressed lengths | Level II | 3.2 | Test |
| 102 | O.D. at compressed length (max.) | Level II | 3.2 | Gage |
| 103 | End not closed and ground | Level II | 3.2 | Visual |
| Minor | | | | |
| 201 | Solid height (max.) | Level IV | 3.2 | Gage |
| 202 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

# CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.14 | Spring, Lockweight | 1 OF 1 | 8833574 |
| | | | NEXT HIGHER ASSEMBLY |

| CLASSIFICATION | EXAMINATION OR TEST | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major | | | | |
| 101 | Loads at compressed lengths, min. (315/0/1) | Level II | 3.2 | Test |
| Minor | | | | |
| 201 | Solid height (max.) | Level IV | 3.2 | Gage |
| 202 | End(s) not squared | Level IV | 3.2 | Visual |
| 203 | Poor workmanship | Level V | 3.18 | Visual |

NOTES:

AMSMC Form 1570b, 1 Jul 89

Replaces 1570, 1 Feb 85, which may not be used



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.4.3 Testing.

4.4.3.1 Salt spray. (See 3.13), Major Defect (See Dwg. 9207967 and ASTM B633 or Federal Specification QQ-P-416 as applicable). A sample of four (4) plated covers shall be selected from each lot and tested as specified in 4.5.2. If one (1) or more covers fail to comply with the salt spray requirement in the applicable specification, the lot shall be rejected.

4.4.3.2 Arming of housing assembly. (See 3.3), Major Defect. A sample of housing assemblies less detonator shall be selected from each lot in accordance with Table II, Attributes Sampling Inspection and subjected to this test. If the number of housing assemblies that fails to comply with the arming requirements exceeds the applicable number allowed by Table II, the lot shall be rejected.

4.4.3.3 Non-arming of housing assembly. (See 3.4), Critical Defect. Each housing assembly, less detonator, shall be tested as specified in 4.5.4, using Government approved equipment. If any housing assembly fails to comply with the non-arming requirement, it shall be classed defective and removed from the lot.

4.4.3.4 Verification of non-arming of housing assembly. (See 3.5), Critical Defect. After completion of the 100 percent inspection specified in 4.4.3.3, 315 housing assemblies, less detonator, shall be selected from each housing assembly lot and subjected to the non-arming test. The test shall be performed as specified in 4.5.5, using Government approved equipment. If one (1) or more housing assemblies fail to comply with the verification non-arming requirement, the lot shall be rejected.

4.4.3.5 Staking of firing pin assembly. (See 3.6), Major Defect. A sample of 50 firing pin assemblies shall be selected from each lot and subjected to this test. The test shall be performed as specified in 4.5.6, using Government approved test equipment. If one (1) or more firing pin assemblies fail to comply with the applicable requirement, the lot shall be rejected.

4.4.3.6 Staking of detonator. (See 3.7), Major Defect. A sample of 80 housing assemblies shall be selected from each lot and subjected to this test. The test shall be performed as specified in 4.5.7, using Government approved test equipment. If two (2) or more assemblies fail to comply with the applicable requirement, the lot shall be rejected.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

After ten (10) consecutive lots have been accepted according to the above sampling plan, the following double sampling plan will be used:

An initial sample of 32 housing assemblies will be selected from each lot and subjected to this test. If two (2) or more failures occur, the lot shall be rejected. If one (1) failure occurs, a second sample of 96 housing assemblies shall be tested. If the total number of failures equals or exceeds two (2), the lot shall be rejected.

If two (2) consecutive lots are rejected when the double sampling plan is in use, the contractor must requalify his process by passing ten (10) consecutive lots according to the single sample plan.

4.4.3.7 X-ray examination of sample fuze assemblies prior to jolt and jumble tests. (See 3.8), Critical Defect. The samples selected for the tests specified in 4.4.3.8 and 4.4.3.9 shall be subjected to this test. If any assembly fails the requirement of 3.8, the lot shall be rejected. This test shall be performed as specified in 4.5.8.

4.4.3.8 Jolt test. (See 3.9), Critical Defect. A sample of 12 fuze assemblies shall be selected from each lot and subjected to this test. Prior to testing, the sample shall be x-rayed as required by 3.8. The jolt test shall be performed as specified in 4.5.9 using Government approved equipment. If one (1) or more fuze assemblies fail to comply with the jolt test requirement, the lot shall be rejected.

4.4.3.9 Jumble test. (See 3.10), Critical Defect. A sample of 125 fuze assemblies shall be selected from each lot and subjected to this test. Prior to testing, the sample shall be x-rayed as required by 3.8. The jumble test shall be performed as specified in 4.5.10, using Government approved equipment. If one (1) or more fuze assemblies fail to comply with the jumble test requirement, the lot shall be rejected. If the detonator of one (1) or more assemblies fires while in the safe position, the lot shall be rejected; Major Defect.

4.4.3.10 Waterproofness (See 3.11), Major Defect. A sample of 50 fuze assemblies shall be selected from each lot and subjected to this test. The test shall be performed as specified in 4.5.11, using Government approved equipment. If, in the original test, 5 or more fuze assemblies fail to comply with the applicable requirement, the lot shall be rejected. If three (3) or four (4) fuze assemblies fail to comply with the applicable requirement, a retest will be permitted, using 50 fuze assemblies. If the total number of failures obtained in the original test plus the retest equals or exceeds seven (7), the lot shall be rejected.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.4.3.11 Transportation vibration. (See 3.12), Critical Defect. A sample of 150 fuze assemblies shall be selected from each lot and subjected to this test. All test samples are to be x-rayed before and after T/V testing to determine position of detonator rotor. The test shall be performed as specified in 4.5.12, using Government approved equipment. If one (1) or more fuze assemblies fail to comply with the transportation vibration test requirement, the lot shall be rejected.

4.4.3.12 Functioning of fuze assembly. (See 3.13), Major Defect. One hundred and fifty (150) fuze assemblies subjected to the transportation vibration test in 4.4.3.11 shall be subjected to this test. The test shall be performed as specified in 4.5.13, using Government approved equipment. If, in the original test 14 or more fuze assemblies fail to comply with the applicable requirement, the lot shall be rejected. If six (6) to thirteen (13) fuze assemblies fail to comply with the requirements, a retest will be permitted using 300 fuze assemblies. (These fuze assemblies must first be subjected to the transportation vibration test in 4.5.12, using Government approved equipment. If one (1) or more fuze assemblies fail the transportation vibration test, the lot shall be rejected). If the total number of failures obtained in the original plus retest equals or exceeds 14, the lot shall be rejected.

4.4.3.13 X-ray examination of all fuze assemblies prior to packing and shipping. Prior to final Government acceptance, all assembled fuzes shall be subjected to x-ray examination to determine internal condition such as: detonator rotor armed or partially armed, missing components, foreign material and workmanship defects. If any fuze assembly fails the requirements of 3.15, the lot shall be rejected. This test shall be performed as specified in 4.5.8.

NOTE: This final x-ray examination is mandatory for contractors employing any hand assembly/operations in their fuze manufacturing process.

4.4.3.14 Check test for deterioration of detonator. If the elapsed time between the acceptance of any detonator lot and assembly of that lot into fuze lots exceeds two (2) years, or if the detonators have been subjected to adverse conditions, however brief, at any time since previous tests, the detonator lot shall be check tested as specified in MIL-D-14978 immediately prior to detonator assembly into fuzes. This test shall be conducted at Government expense without cost to the supplier who loaded the detonator or the supplier assembling the detonator into the fuze, and shall not constitute a basis for rejection against either supplier, except where deterioration has occurred as a direct result of carelessness in handling, storage, etc., while the detonator lot is under the jurisdiction of either contractor.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection.

4.5.1 Locking of detonator rotor. (See 4.4.2.10) Prior to inserting the detonator, the housing assembly shall be probed to determine if the detonator rotor is in the fully armed position. If so, the assembly shall be classified defective and removed from the lot. If the detonator rotor is not fully armed, a machine probe inserted into the detonator hole of the detonator rotor will apply counter-clockwise pressure to move the detonator rotor as far as possible to the safe position. If the detonator rotor is found not to be locked in the unarmed position, the assembly shall be classified defective and removed from the lot. (Rotational directions are as viewed through the lead cup hole).

4.5.2 Salt spray of cover. (See 4.4.3.1) The plated covers shall be tested in accordance with ASTM B-633 (Vol. 02.0) or with Federal Specification QQ-P-416, as applicable. (Parts subjected to this test shall be discarded).

4.5.3 Arming of housing assembly. (See 4.4.3.2) The housing assembly, less detonator, shall be mounted in a Government approved fixture and rotated about its axis of symmetry to the arming speed specified (3.3). The direction of rotation shall be counter-clockwise when looking at the blowout end. The angular acceleration shall not exceed that used in the non-arming test (4.5.4). The maximum time to reach the specified arming speed shall be six (6) seconds. Observation shall be made for arming as evidenced by the detonator hole in the rotor being visible through the lead cup hole in the housing. (Parts subjected to this test can be reused at the contractor's own risk).

4.5.4 Non-arming of housing assembly. (see 4.4.3.3) The housing assembly, less detonator, shall be mounted in a Government approved fixture and rotated about its axis to the non-arming speed specified (3.4). The rotation must be in a counter-clockwise direction when looking at the blowout end. The angular acceleration shall not be less than that used in the arming test (4.5.3). Observation for the non-arming shall be as evidenced by the detonator rotor being in the fully unarmed position.

4.5.5 Verification of non-arming of housing assembly. (See 4.4.3.4) After completion of the non-arming test (4.5.4), the housing assembly, less detonator, shall be mounted in a Government approved fixture and rotated about its axis to the verification non-arming speed specified (3.5). The rotation must be in a counter-clockwise direction when looking at the blow-out end. The angular acceleration shall not be less than that used in the arming test (4.5.3). Observation for non-arming shall be made as evidenced by the rotor being in the fully unarmed position.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.5.6 Staking of firing pin assembly. (See 4.4.3.5) The firing pin assembly shall be mounted onto a Government approved fixture and held securely by the firing pin with the assembly oriented with the firing pin spring under the firing pin. (See Figure 1). The specified load, (F), shall be applied to the firing pin spring at a point outside the staked end of the firing pin. The force shall be applied in a direction to separate the firing pin spring from the firing pin. (Assemblies subjected to this test shall be discarded).

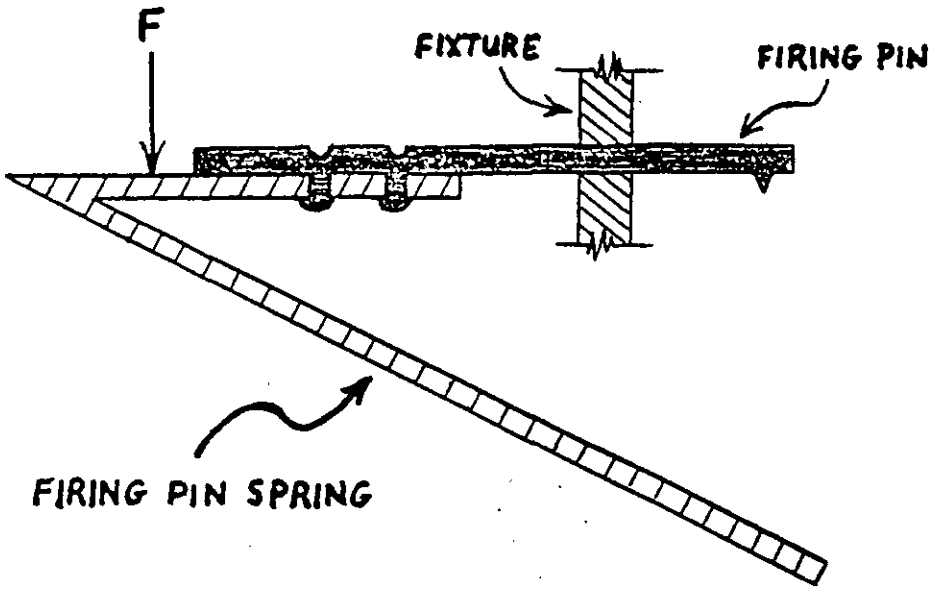



FIGURE 1. Recommended Holding Fixture Configuration

4.5.7 Staking of detonator. (See 4.4.3.6) Before being subjected to this test, the detonator rotor shall be separated from the housing assembly and the rotor shaft removed from the rotor. The rotor shall then be assembled onto the Government approved test equipment. The load specified on drawing 9215195 shall then be applied. All test specimens shall be visually inspected for torn or ruptured detonator cases caused by off-target staking and for bulged or above flush detonator cases. (Assemblies subjected to this test shall be discarded).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.5.8 X-ray examination of fuze assemblies. (See 4.4.3.7 and 4.4.3.13) Armed or partial armed fuzes shall be determined by x-ray. Radiographic equipment, procedures and evaluation shall be in accordance with MIL-STD-453. Radiographic personnel shall be qualified in accordance with MIL-STD-410.

4.5.9 Jolt test. (See 4.4.3.8) The fuze assemblies shall be assembled to the Government approved adapter and subjected to the jolt test in accordance with MIL-STD-331. Arming or partial arming of the fuze shall be determined by x-ray. The rotor must be locked in the unarmed position. (Assemblies subjected to this test shall be discarded).

4.5.10 Jumble. (See 4.4.3.9) The fuze assembly shall be subjected to the jumble test in accordance with MIL-STD-331. Arming or partial arming of the fuze shall be determined by x-ray. The rotor must be locked in the unarmed position. (Assemblies subjected to this test shall be discarded).

4.5.11 Waterproofness. (See 4.4.3.10) The fuze assembly shall be immersed in water to a depth of not less than three (3) or more than eight (8) inches. The chamber shall be evacuated to a differential pressure of 11.0 ± 1.5 inches of mercury for a period of not less than one (1) minute. The water shall contain the wetting agent Nacconal NR (Sodium Alkyl Aryl Sulfonate) or equivalent in a concentration of approximately 1 1/2 teaspoonful per gallon of water. (Assemblies subjected to this test shall be discarded).

4.5.12 Transportation vibration. (See 4.4.3.11) The fuze assembly shall be first packed in a standard shipping carton. (Dummy fuzes shall be used to fill the remainder of carton). The carton shall then be securely fastened to the vibration machine and tested in accordance with MIL-STD-331. Arming or partial arming of the fuze shall be determined by x-ray. The rotor must be locked in the unarmed position.

4.5.13 Functioning of fuze assembly. (See 4.4.3.12) After successful completion of the transportation/vibration test, the fuze assembly shall be spun to 5000 ± 500 revolutions per minute (RPM). Spinning of the fuze assembly may be accomplished by use of test vehicle (Dwg. C9214362) and air jet or by use of spin test fixture (Dwg. F9202982). Use of test vehicle (Figure 2) may be elected to stabilize spinning fuze during its descent. After the specified spin rate is obtained, the assembly shall be allowed to drop 9 to 9.5 feet onto a 3/4 inch thick plywood sheet securely attached to a 1/2 inch plywood sheet. (The 3/4 inch thick sheet shall be replaced after a maximum of 250 assemblies have been dropped on it). Observation shall be made as to whether the fuze fires on impact or in the air.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

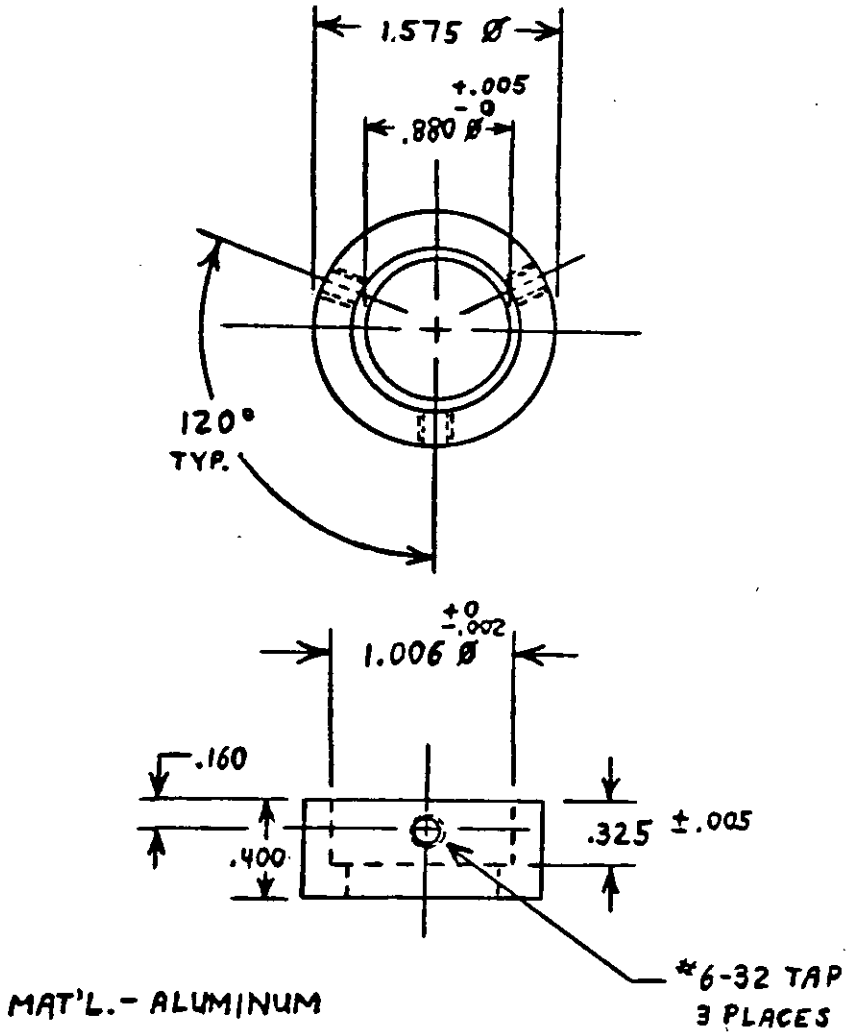



FIGURE 2. Test Vehicle for M219A2 Fuze

4.5.14 Safe position of detonator rotor. (See 4.4.2.1) The fuze assembly, just prior to installing the lead cup, shall be probed to determine safe positioning of the detonator rotor. A machine probe which locates from the empty lead cup hole will determine the safe positioning of the detonator rotor. Any assembly which exhibits more than eight degrees ($8^{o}$) of rotor movement from the locked position shall be classified defective and removed from the lot.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging, packing and marking shall be in accordance with Dwg. 8882317 and 8882318.

5,2 Shipping. When shipments of fuzes for more than one lot are made as a carload, each lot must be kept separate and the division between lots clearly indicated to prevent mixing in transit.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The components covered by this specification are intended for use on the M219A1 and M219A2 Grenade Fuze.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.2).
c. Requirements for submission of first article sample.

6.3 Submission of inspection equipment designs for approval. Submit designs as required to: Commander, U.S. Army ARDEC, ATTN: AMSTA-AR-QAA-B, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Submission of process control documents. Process control documents as specified in 4.1.2 shall be submitted in accordance with DD Form 1423 to: Commander, US Army ARDEC, ATTN: AMSTA-AR-QAA-B, Picatinny Arsenal, NJ 07806-5000.

6.6 Submission of performance data. In addition to normal distribution records, one (1) copy of all performance data shall be forwarded to Commander, US Army ARDEC, ATTN: AMSTA-AR-EDE, Picatinny Arsenal, NJ 07806-5000.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

6.7 Submission of alternative quality conformance provisions. All contractor proposed alternative quality conformance provisions will be submitted to the Government for evaluation/approval as directed by the contracting activity.

6.8 Subject term (key word) listing.

Lockweight
Rotor
Housing Assembly
Lead Cup

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1375-0015)



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER | 2. DOCUMENT DATE (YYMMDD) |
|---|---|---|
| | MIL-F-50454 (AR) | 950127 |

3. DOCUMENT TITLE: FUZE, GRENADE M219A1 AND M219A2 LOADING, ASSEMBLING AND PACKING

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME (Last, First, Middle Initial) | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(2) AUTOVON (If applicable) | 7. DATE SUBMITTED (YYMMDD) |

8. PREPARING ACTIVITY

| a. NAME | b. TELEPHONE (Include Area Code) | |
|---|---|---|
| U.S. ARMY ARDEC<br>STANDARDIZATION OFFICE | (1) Commercial<br>201-724-6675 | (2) AUTOVON<br>DSN-880-6675 |
| c. ADDRESS (Include Zip Code)<br>ATTN: AMSTA-AR-EDE-S<br>PICATINNY ARSENAL, NJ 07806-5000 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466<br>Telephone (703) 756-2340 AUTOVON 289-2340 | |



Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:02Z
Check the source to verify that this is the current version before use.