MIL-I-3949D
AMENDMENT 2
27 April 1984
SUPERSEDING
INTERIM AMENDMENT 1
28 October 1983

MILITARY SPECIFICATION

INSIGNIA, RANK, OFFICER'S METAL;
GENERAL SPECIFICATION FOR

This amendment forms a part of Military Specification MIL-I-3949D, dated 31 December 1971, and is approved for use by all Departments and Agencies of the Department of Defense.

Page 1

Para. 2.1 - Line 6, delete "PPP-B-601- Boxes, Wood, Cleated - Plywood" and "PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner".

Para. 2.1 - Line 8, delete title and insert "Box, Shipping, Fiberboard".

Para. 2.1 - Line 14, delete "Fed. Std. No. 151" and insert "FED-STD-151".

Page 5

Para. 3.7.1.1 - Line 4, deleted "fused to the back of" in its entirety and substitute the following, "electronically fused to the back of".

Para. 3.8.2.1 - Delete lines 4 and 5 in their entirety and substitute the following: "shall not be permitted. No visible chemical reaction, such as evolution of gases, shall appear when the gold plating is tested as specified in 4.4.5."

Para. 3.8.2.2 Rhodium Plating. - Delete in its entirety and substitute: Rhodium plated insignia shall be given a nickel flash underplating. When tested as specified in paragraph 4.4.5, no visible chemical reaction shall occur."

Page 9

RE: "Classification of defects table", delete "...approved sample" wherever cited and substitute "...approved guide sample".

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:43Z
Check the source to verify that this is the current version before use.

RE: "Classification of defects table", correct spelling of defect under "Lacquering" to read "noticeable".

Page 11

Correct spelling to read "from" in next-to-last defect under "Contractor's identification and quality marking".

Page 12

Para. 4.3.4.7 End item testing - Delete in its entirety and substitute: "Testing of the completely fabricated insignia shall be performed in accordance with Table III for the characteristics shown therein. The sample unit for end item testing, except for fused prongs, shall be two completely fabricated insignia for each rank and size; for fused prongs, the sample unit shall be one insignia. The requirements are applicable to the individual unit and except for fused prong testing, with one determination per sample unit; for fused prongs, all prongs on that item will be tested, however, one defect will be scored regardless of how many prongs on that item fails. The results shall be reported pass or fail. Except for fused prong testing, the inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units; for fused prong testing, the inspection level shall be S-2 and the AQL shall be 6.5 D.H.U."

Table III - Delete "Test for fused prongs" and substitute "Test for electronically fused joints".

Table III - Under "Characteristic" delete "Test for Continuity of Nickel and Rhodium plating" and substitute "Acid test for gold or rhodium plating". Delete "Acid test for gold plating --- 3.8.2.1 --- 4.4.5."

Page 13

Para. 4.4.1, Line 2 - delete "Fed. Std. 151." and substitute "FED-STD-151."

Para. 4.4.3 - Delete in its entirety and substitute the following:

"4.4.3 Test for Electronically Fused Joints. - Item to be tested shall be anchored on a horizontal surface. All prongs on each end item sample shall be grasped at least 1/3 its length above the fused joint and bent thru an angle of 90 degrees (45 degrees to each side of the vertical) until separation occurs. The fused joint shall then be examined to determine compliance with 3.6.2. A bending tool in the form of a 45 degree template may be used for this test, provided the prong is gripped at least 1/3 its length above the fused joint."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:43Z
Check the source to verify that this is the current version before use.

Page 14

Delete paragraphs 4.4.5 and 4.4.6 in their entirety and substitute the following:

Para. 4.4.5 Continuity of Nickel and Rhodium Plating. - Delete in its entirety and substitute new paragraph: "4.4.5 Acid test for gold or rhodium plating - Insignia to be tested for compliance with 3.8.2.2, may be unlacquered or have the lacquer completely removed with an organic solvent. The acid test shall be conducted as follows: using a test acid consisting of a solution containing 50 percent by volume nitric acid (specific gravity 1.42) and equal volume of distilled water. At room temperature place a drop of test acid (each drop to be 1/8 inch minimum diameter) on three different spots on face of insignia. The drops shall remain on the insignia for not less than one minute. A minimum of two of these spots shall withstand this test."

Page 15

Para. 5.1.1.2 - Line 3, correct spelling read "conforming".

Add the following sentence to the end of paragraph 5.1.1.2:

The use of Scotch Brand box closing filament tape no. 898, or equal, 1/2", using a minimum of two 1/2" x 4" ("L" Clips) on each edge, may be utilized as an alternate method for effecting closure of set-up boxes.

Para. 5.2.1 - Delete paragraph in its entirety and substitute the following:

"5.2.1 Level A. - Insignia of one type and size only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to class weather resistant. Closure shall be in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed the size and weight limitations of the container specification."

Para. 5.2.2 - Line 3, delete "forming to" in its entirety and substitute "forming to type CF of SF,".

Para. 6.1 - Line 2 - Delete "rank or grade." and insert "rank."

Delete "Figure 1, B-13-12, dated 14 Dec 70" and substitute "Figure 1, B-13-12, dated 16 Mar 79".

General statement: RE: specification sheets for Army and Air Force items:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:43Z
Check the source to verify that this is the current version before use.


Whenever 1/20th silver filled is to be used, substitute "red brass or nickle silver".

Preparing Activity:
The Institute of Heraldry,
United States Army


	CUSTODIANS:	REVIEW ACTIVITIES:	USER ACTIVITIES:	PREPARING ACTIVITIES
Army	1H			1H
Air Force	11	99, 82	45	
Navy	NU	MC		
DLA		CT		

Project No. 8455-0029

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:43Z
Check the source to verify that this is the current version before use.

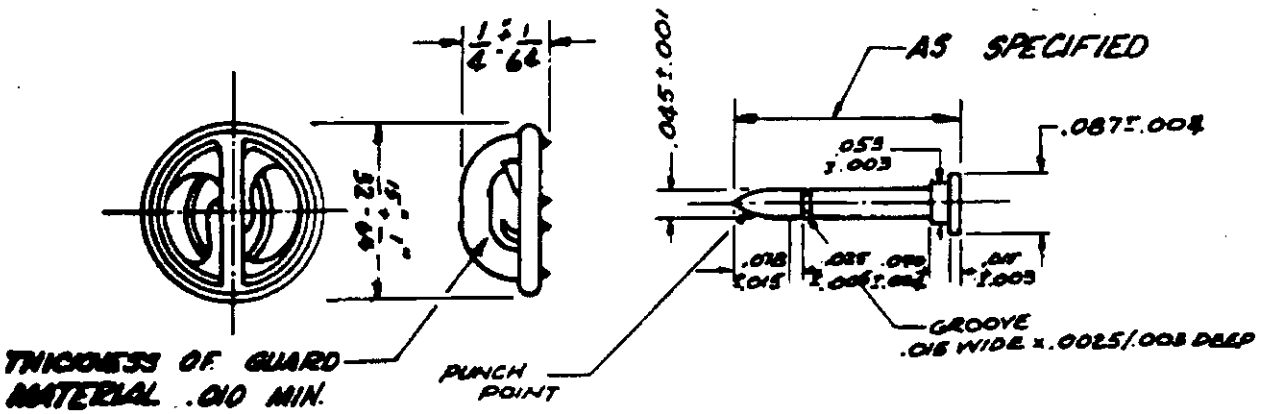

CLUTCH PRONG

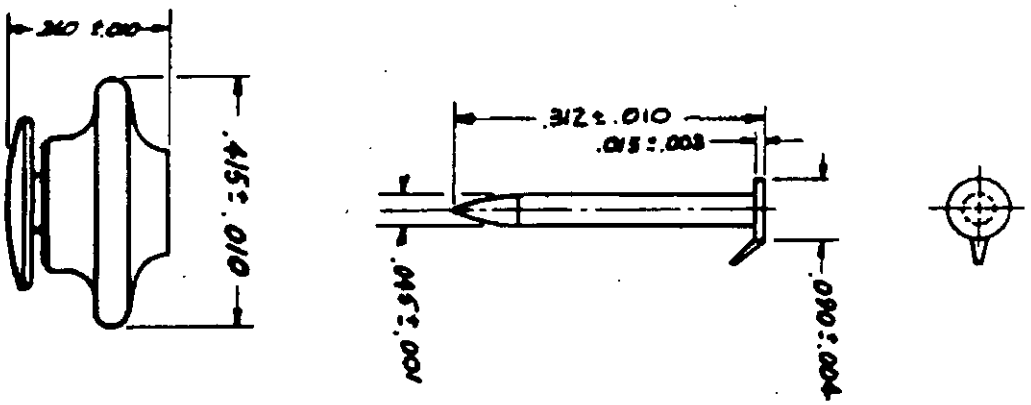

FLAT BALL TYPE CLUTCH PRONG WITH PICK

Figure 1

This is a miniature copy of THE INSTITUTE OF HERALDRY, Drawing No. B-13-12, dated 16 MARCH 79. This copy is for information only. Drawing referenced in para. 2.1 governs.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1984—705—040/A2586

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:43Z
Check the source to verify that this is the current version before use.