
MIL-C-11015/4C
6 December 1967
SUPERSEDING
MIL-C-11015/4B
2 April 1962

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC (GENERAL PURPOSE), STYLE CK27

The complete requirements for procuring the capacitors described herein shall consist of this document and the issue in effect of Specification MIL-C-11015.

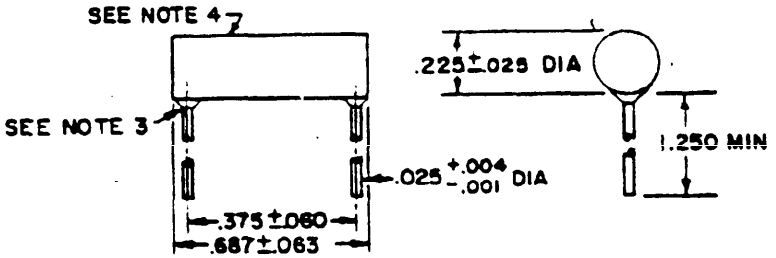

INCHES	MM
.001	.03
.004	.10
.025	.64
.060	1.52
.063	1.60
.225	5.72
.375	9.53
.687	17.45
1.250	31.75

NOTES:
1. All dimensions in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Insulating coating shall not extend more than .125 (3.18 mm) along lead wires measured from body of capacitor.
4. The beginning of the type designation shall be adjacent to the end having the inner-electrode terminal.

NOT FOR NEW DESIGN
FOR REPLACEMENT PURPOSES ONLY

REQUIREMENTS:

Design and construction:
Dimensions and configuration - See above figure.
Case type - Tubular with radial leads.
Capacitance value - See table I.
Capacitance tolerance - ±10% (K) or ±20% (M) as shown in table I.
Rated temperature - -55° to +85° C.

Dielectric withstanding voltage:
Dielectric: Method 301 of MIL-STD-202.
Test voltage - 250% of rated voltage.
Body insulation: Shall be able to withstand 1,300 volts for 5 ± 1 seconds between leads and a V-block which shall extend beyond the ends of the capacitor body.

Barometric pressure (reduced): Method 105 of MIL-STD-202. 0.82 inch of mercury (80,000 ft).
Test potential - 150% of rated voltage.

Insulation resistance (IR): Method 302 of MIL-STD-202, condition B. 20,000 megohms, min.

Capacitance: Method 305 of MIL-STD-202.
Test frequency - 1 kHz ± 100 Hz.
Test voltage - 1.0 ± 0.2 volt rms.

Dissipation factor (DF): 1.5%, max.

Shock, medium impact: Not applicable.

(C) No technical changes.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:54Z
Check the source to verify that this is the current version before use.

TABLE I. Style CK27 characteristics.

Type designation 1/	Rated voltage	Rated temperature and voltage-temperature limits	Capacitance	Capacitance tolerance
	volts, dc		pf	
CK27AX821K	500	AX	820	K
CK27AX102-	500	AX	1,000	K, M
CK27AX122K	500	AX	1,200	K
CK27AX152-	500	AX	1,500	K, M

1/ Where applicable, the complete type designation will include an additional symbol to indicate capacitance tolerance.

Vibration, high frequency: Method 204 of MIL-STD-202, condition B (15 G's).

Temperature cycling and immersion:
Temperature cycling: Method 102 of MIL-STD-202, condition D.
Immersion: Method 104 of MIL-STD-202, condition B.
IR - 3,000 megohms, min.

Salt spray (corrosion): Not applicable.

Terminal strength: In accordance with MIL-C-11015. 5 pounds applied.

Moisture resistance: Method 106 of MIL-STD-202.
IR - 3,000 megohms, min.

Solderability: Method 208 of MIL-STD-202. 2 terminals.

Resistance to soldering heat: Not applicable.

Voltage-temperature limits: In accordance with MIL-C-11015.

Life (at elevated ambient temperature):
Method 108 of MIL-STD-202. 1,000 hours (for qualification); 250 hours (performance check); 750 hours (continuation test).
Test potential - 200% of rated voltage.
IR - 500 megohms, min (at 85° C);
10,000 megohms, min (at 25° C).
DF - 3%, max (at 25° C).

Marking: In accordance with MIL-C-11015.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MI
Navy - EC, AS, OS, SH
Air Force - 11, 17, 85
DSA - ES

User activities:
Army -
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

(Project 5910-0829-5)

Code "C"

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:54Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONICS SYTEMS COMMAND
DEFENSE STANDIZATION PROGAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 20261O-17T14:54Z
Check the source to verify that this is the current version before use.