MIL-P-11006 (Ord)
12 March 1951
SUPERSEDING
Packaging Instructions
AFPS 12-1, AFPS 88-1,
AFPS 162-3 & AFPS 164

MILITARY SPECIFICATION

PACKAGING OF 6X30 AND 7X50 BINOCULARS

1. SCOPE

1.1 This specification covers the packaging, packing, and marking for interplant shipment, domestic shipment and storage, and overseas shipment of 6X30 and 7X50 binoculars.

2. APPLICABLE SPECIFICATIONS

2.1 Specifications.- The following specifications, of the issue in effect on date of invitation for bids, form a part of this specification:

FEDERAL SPECIFICATIONS

NN-B-601	-	Boxes; Wood-Cleated-Plywood, for Domestic Shipment.
NN-B-621	-	Boxes; Wood, Nailed and Lock Corner.
TT-E-485	-	Enamel; (For) Drums and Other Metal Products, Rust-Inhibiting, Olive Drab.
UU-T-111	-	Tape; Paper, Gummed (Kraft).
LLL-B-631	-	Boxes; Fiber, Corrugated (For Domestic Shipment).
LLL-B-636	-	Boxes; Fiber, Solid (For Domestic Shipment).

MILITARY SPECIFICATIONS

JAN-P-101	-	Packaging and Packing for Overseas Shipment - Adhesive, Water-Resistant, For Sealing Fiberboard Boxes.
JAN-P-105	-	Packaging and Packing for Overseas Shipment - Boxes, Wood, Cleated, Plywood.
JAN-P-106	-	Packaging and Packing for Overseas Shipment - Boxes; Wood, Nailed.
JAN-P-108	-	Packaging and Packing for Overseas Shipment - Boxes; Fiberboard (V-Board and W-Board), Exterior and Interior.
JAN-P-117	-	Packaging and Packing for Overseas Shipment - Bags, Interior Packaging.
JAN-P-125	-	Packaging and Packing for Overseas Shipment - Barrier Materials, Waterproof, Flexible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

MILITARY SPECIFICATIONS (CONT'D)

JAN-P-127	-	Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure Sensitive, Water-Resistant.
MIL-B-131	-	Barrier-Material; Water-Vaporproof, Flexible.
JAN-P-139	-	Packaging and Packing for Overseas Shipment - Plywood, Container Grade.
JAN-P-140	-	Packaging and Packing for Overseas Shipment - Adhesives, Water-Resistant, Case Liner.
JAN-D-169	-	Desiccants (Activated).
MIL-B-3106	-	Board, Composition, Water-Resistant, Solid (For Filler or Cushioning Pads).

U. S. ARMY SPECIFICATIONS

19-10	-	Fillers, Interior Packing, Fiberboard, Corrugated, Single and Double Faced (For General Packing Purposes).
100-2	-	Standard Specification for Marking Shipments by Contractors.

ORDNANCE DEPARTMENT TENTATIVE SPECIFICATION

AXS-1472	-	Adhesive, Label (Water-Resistant).

(Copies of specifications should be obtained from the procuring agency or as directed by that agency. Both the title and identifying number or symbol should be stipulated when requesting copies.)

3. REQUIREMENTS

3.1 General information.- The following is a list of binoculars W/E covered by this specification:

Binoculars, 6X30, W/E
Consisting of:

Model No.	Equipment	Stock No.
M3, M8	Case, Carrying, M62A1	F001-6702491
	or	F001-6702502
M9, M13, M13A1	Case, Carrying, M17	F001-6702504
	or	F001-6702508
	Case, Carrying, M62	F001-6702509

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

043422

Binoculars, 7X50, W/E
Consisting of:

Model No.	Equipment	Stock No.
M15	Case,Carrying, M44	F001-6702512
M17		F001-6702516
MK21		F001-6702524
M7	Case, Carrying, M63A1	F001-6702500
M15A1	or	F001-6702513
M16	Case, Carrying, M24	F001-6702514
M17A1	or	F001-6702518
MK21A1	Case, Carrying, M63	F001-6702533

3.2 Cleaning.- Each binocular shall be cleaned and the exposed glass surfaces covered with at least four thicknesses of neutral lens tissue paper prior to packaging. The tissue paper shall be secured in place with rubber bands.

3.3 Packaging.

3.3.1 Prepackaging.- Interpupillary and diopter settings shall be as shown on figure 2. A bag of desiccant shall be placed between the bodies or barrels of each binocular as shown on figure 2. The desiccant shall conform to type V, grade A of Specification JAN-D-169. Each prepared binocular shall be placed in a water-vaporproof barrier bag and heat sealed, exhausting entrapped air prior to final closure. The bag shall be fabricated from water-vaporproof barrier material conforming to class D of Specification MIL-B-131.

3.3.2 Preferred packaging method.- Except for Army installations not equipped to package binoculars in metal cans, the following packaging method shall be used unless permission is granted to use the alternate packaging method specified in 3.3.3.

3.3.2.1 Each removable binocular neck strap shall be coiled and placed in the bottom of the carrying case. The bagged binocular shall then be positioned in the case and the lid closed.

3.3.2.2 The carrying case and carrying case strap, and a filter if required (see 3.3.4), shall be placed in a metal can. The can for the 6x30 binocular shall be lined with double-face corrugated fiberboard conforming to Specification 19-10. The case and case strap, plus a packaged filter if required, shall be immobilized in the can in such a manner that there is no movement of the contents after the can is sealed. Carrying case, M44, shall be placed in the can with the lid of the case resting on the bottom of the can. The can shall be sealed as specified on figures 3 and 4. Metal cans shall conform to the requirements specified on figures 3 and 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

3.3.2.3 Can opener.- Each can shall have a small compact can opener of approved type (not to protrude above or beyond the double seams), inclosed in a paper envelope, taped to the top of the can with pressure-sensitive tape conforming to type I, II, or III, grade A or B of Specification JAN-P-127. Illustration of the midget type opener is shown on figure 1.

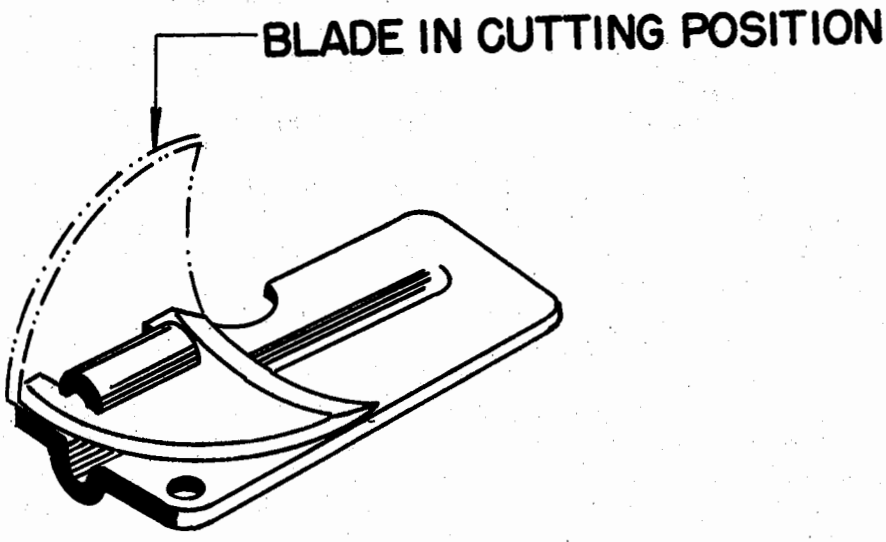


FIGURE 1

3.3.2.3.1 Directions on how the opener is to be used shall appear on one side of the envelope containing the opener. The envelope containing the opener shall be taped to the top of the can in such a manner that the tape covers the envelope and extends at least 3/4 inch beyond the edges. The side of the envelope containing the directions shall be in contact with the top of the can.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

3.3.3 Alternate packaging method.- The following method may be used by Army installations not equipped to package binoculars in metal cans; also, by other facilities that have been specifically authorized.

3.3.3.1 Each removable binocular neck strap shall be coiled and placed in the bottom of the carrying case. The bagged binocular shall be positioned in the case and the lid closed.

3.3.3.2 Each removable carrying case strap shall be coiled and placed on top of the carrying case. If a filter is required, for the 6x30 binocular (see 3.3.4), it shall also be placed on top of the case. The case and the coiled strap, plus a packaged filter if required, shall be wrapped with flexible single-face corrugated paper. The wrap shall be secured with gummed tape conforming to grade B of Specification UU-T-111.

3.3.3.3 The wrapped carrying case shall be immobilized in a fiberboard box. The box shall conform to one of the following specifications:

JAN -P-108	-	(Any compliance symbol, any style (including a reverse tuck style) except FTC.)
LLL-B-631) LLL-B-636)	-	(Style RSC or CLC (full overlap) minimum bursting strength 175 lbs. per square inch.)

3.3.3.4 Each fiberboard box shall be closed by applying water-resistant adhesive over all areas of contact on the flaps and covering all seams, including the manufacturer's joints, with tape. The adhesive shall conform to Specification JAN-P-101. Pressure-sensitive tape, conforming to type II or III, grade A or B of Specification JAN-P-127, at least 2 inches in width, shall be used to seal fiberboard boxes specified in Specification JAN-P-108, compliance symbol V1s, V2s, V3s, V3c, W5s or W5c. Other fiberboard boxes shall be sealed with gummed tape conforming to grade B of Specification UU-T-111.

3.3.3.5 A fiberboard box, which does not meet the requirements of V1s, V2s, V3s, W5s or W5c, of Specification JAN-P-108, shall be overwrapped with flexible waterproof barrier material conforming to type C-1, C-2 or E-1 of Specification JAN-P-125. Water-resistant adhesive, conforming to Specification JAN-P-140, shall be applied over all areas of contact on the seams and between the flaps on the ends. All seams shall be covered with pressure-sensitive tape conforming to type II or III, grade A or B of Specification JAN-P-127.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

3.3.4 Filter packaging.- When a filter, M1, is to accompany a binocular, the filter shall be packaged in the following manner:

3.3.4.1 For 6 x 30 binocular.- The filter shall be unit packaged in the following manner unless it has already been packaged in an approved fashion:

3.3.4.1.1 A strip of bias binding tape (approximately 7 inches long x 1/4 inch wide) shall be placed over the diameters of the eyepieces where the eyeguards fit. The eyeguards shall be placed over the bias binding tape and pressed in position. This tape serves to simplify removing the eyeguards.

3.3.4.1.2 The filter shall be wrapped with flexible single-face corrugated paper and the wrap secured with gummed tape conforming to grade A or B of Specification UU-T-111.

3.3.4.2 For 7 x 50 binocular.- The filter shall be attached to the binocular.

3.4 Packing.

3.4.1 Segregation of binoculars in shipping containers.- Unless specifically authorized otherwise, only identical binoculars of the same stock number shall be packed in a shipping container.

3.4.2 For domestic shipment and storage.

3.4.2.1 The shipping container shall conform to either of the following specifications:

NN-B-601, style A or B, type A, B, or C.

NN-B-621, style 2 or 4.

3.4.2.2 The shipping container shall contain not more than twenty-four 6 x 30 binocular packages or twelve 7x50 binocular packages. Nailed wood boxes shall be strapped with flat steel straps as required in Specification NN-B-621. Where the gross weight exceeds 100 pounds, plywood boxes shall be strapped with flat steel straps in accordance with Specification JAN-P-105. Straps shall not be stapled.

3.4.3 For overseas shipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

3.4.3.1 The shipping container shall conform to either of the following specifications, utilizing group I or II lumber and flat steel straps:

JAN-P-105, style A or B. Plywood shall conform to type A or B, condition I of Specification JAN-P-139.

JAN-P-106, style 2 or 4. Minimum thickness of lumber for sides, top and bottom shall be 11/16 inch, when shipment is to be made by an ocean-going vessel.

3.4.3.2 The overseas shipping container shall contain not more than ten 6x30 binocular packages or six 7x50 binocular packages.

3.4.4 Waterproof fiberboard liner.- Each domestic and overseas shipping container containing binoculars packaged in cans shall be lined with fiberboard and the cans shall be separated from each other with fiberboard separators. Water-resistant fiberboard conforming to Specification MIL-B-3106 shall be used in each overseas shipping container and double-faced corrugated fiberboard conforming to Specification 19-10 shall be used in each domestic shipping container.

3.4.5 Water-resistant case liner.- The overseas shipping container for binoculars packaged by the alternate method, which utilizes fiberboard boxes that require water-resistant overwraps, shall contain a water-resistant case liner or bag in which the binocular unit packages shall be packed. The case liner shall fit snugly in the container and shall be fabricated from material conforming to Specification JAN-P-125. Joints and closure shall be completely sealed with a continuous seam, at least 2 inches wide, of water-resistant adhesive conforming to Specification JAN-P-140.

3.4.6 Immobilizing.- The contents of each shipping container shall either fit snugly in the container or shall be immobilized in such a manner that the contents cannot move about after the container is closed.

3.5 Identification and marking.

3.5.1 Metal cans.- The data to be added on the metal cans shall be as specified on figures 3 and 4. The applicable stock number, serial number, etc. shall be added on the can with waterproof black ink.

3.5.1.1 See 3.5.4, 3.5.5 and 3.5.7 for Method II package indication, inspection seal, and special markings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

3.5.2 Fiberboard boxes and overwraps.- Each fiberboard container and water-resistant overwrap shall have the following information printed or marked in a legible manner either directly on each container and overwrap or on a label affixed to each container and overwrap:

QUANTITY _____

NOMENCLATURE _____

STOCK NO. _____

SERIAL NO. _____

REBUILT BY OR MFD BY _____

DATE PACKED _____

3.5.2.1 See 3.5.4, 3.5.5 and 3.5.7 for Method II labels, inspection seals and special markings.

3.5.3 Shipping container.- In addition to other markings that may be required (see 6.3), the information to be placed on each shipping container shall be in accordance with Specification 100-2, except that the nomenclature shall be omitted for security reasons. The identification data including the cubage or displacement of the container shall be stencilled or printed on the container. The domestic shipping container shall be marked "DOM PK", which shall be placed adjacent to the description of the contents in letters 1-1/2 inches high where possible, but never less than 1 inch.

3.5.3.1 See 3.5.4, 3.5.5 and 3.5.7 for Method II labels, inspection seals and special markings.

3.5.3.2 Packing lists.- Each shipping container shall contain packing lists showing the serial numbers of the binoculars in the container.

3.5.3.2.1 For domestic shipment.- The domestic shipping container shall have two lists. One list shall be placed in a waterproof envelope, which in turn shall be placed inside the shipping container adjacent to the top panel of the container. A duplicate list shall be placed in a waterproof envelope securely attached to the exterior of the container in the most protected location.

3.5.3.2.2 For overseas shipment.- The overseas shipping container shall have three lists. One list shall be placed inside the container and one on the outside as described in 3.5.3.2.1. The third list shall be placed in a waterproof envelope, securely attached to the exterior of the container in a protected location and covered with a hard weatherproof fiber cover.

043422
Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

3.5.3.3 Fragile labels.- "FRAGILE" labels shall be affixed to at least three panels of each shipping container. These labels may be obtained by requisition from the procuring agency by reference to the following forms (dated 1 February 1945):

WD AGO Form 433 (4 inches square)

WD AGO Form 433-2 (6 inches square)

3.5.4 Method II package indication.- The upper left-hand portion of the side of each can shall contain the identification data indicating a Method II package as shown on figures 3 and 4. Method II labels shall be affixed to at least one side of each fiberboard container and water-resistant overwrap, and to at least two panels of each shipping container. Add month and year packed to each label. Labels may be obtained by requisition from the procuring agency.

3.5.5 Official Ordnance Corps inspection seal (escutcheon).

3.5.5.1 Metals cans.- The inspector shall add the date of inspection and his full name (not initials) with waterproof black ink in the space provided on the inspection seal that appears on the can.

3.5.5.2 Alternate packaging method.- An inspection seal shall be affixed to each fiberboard box in such a manner that the seal will be broken if the container is opened. Two seals shall be affixed to each water-resistant overwrap in such a manner that at least one of the seals will be broken if the overwrap is removed.

3.5.5.3 Shipping container.- An inspection seal shall be affixed to the end panel containing the packing list.

3.5.5.4 The inspector's full name (not initials) and the date of inspection shall appear on each seal applied to each fiberboard box, overwrap, and shipping container.

3.5.6 Coating labels and seals.- All labels and seals shall be coated with water-resistant label adhesive conforming to Specification AXS-1472.

3.5.7 Special markings.

3.5.7.1 Unit containers and shipping containers containing binoculars with filters shall have "W/FILTER" added on the sides of the containers (including the overwrap) containing the identification data. "W/O FILTER" shall be added if the binoculars do not have filters.

3.5.7.2 The identification number of the modification work order which has been applied to binoculars shall have "M.W.O. No._____ APPLIED" added on the identification data side of unit containers(including the

043422
Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

overwrap) and shipping containers containing such binoculars.

3.6 Interplant shipment requirements.- Where an interplant shipment is involved the following packaging, packing, and marking requirements shall apply:

3.6.1 Packaging.- Packaging shall be in accordance with 3.3.3, except that the water-resistant overwrap (see 3.3.3.5) may be eliminated.

3.6.2 Packing.- The shipping container shall be as specified in 3.4.2. Immobilizing shall be as specified in 3.4.6.

3.6.3 Marking.- Marking shall conform to the applicable requirements of 3.5.3 for domestic shipment.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Inspection.- Inspection shall be made throughout the entire process of packaging and packing.

4.2 Test procedures.- The Government reserves the right to use any established commercial method of test, and such additional information deemed necessary to determine compliance with the requirements and intent of this instruction. Unless otherwise specified, each sealed metal can shall be tested for leaks as specified on figures 3 and 4.

5. PREPARATION FOR DELIVERY (NOT APPLICABLE)

6. NOTES

6.1 Ordering data.- Invitation for bids and contracts or orders should specify the title, number, and date of this specification, the type of shipment involved, and type of packaging and packing required.

6.2 If any Army installation receives a request for binoculars with filters and binoculars already unit packaged without filters are available, the binocular unit packages need not be opened to include the filters. In this case, the filters should be prepared and prepackaged as specified in 3.3.4.1 and heat sealed in waterproof bags conforming to type II or III, grade A, class B of Specification JAN-P-117. The bagged filters should be intermediate packaged in a fiberboard box. The box, sealing method, etc. should be as specified in 3.3.3.3, 3.3.3.4 and 3.3.3.5. If feasible, the filters should be packed in the shipping container with the binocular unit packages.

6.3 The marking of overseas shipping containers by Army installations should be in accordance with Department of the Army Technical Manual TM 38-414.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.


NOTICE: This specification, together with specifications pertaining to it and bearing a "NOTICE" of similar restrictions, is intended for use only in connection with procurement by the United States Government; and shall not be reproduced either wholly or in part except when authorized in connection with Government procurement, nor be used for any other purpose except when specifically authorized by the Chief of Ordnance.

CUSTODIAN:

Army-Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

043422

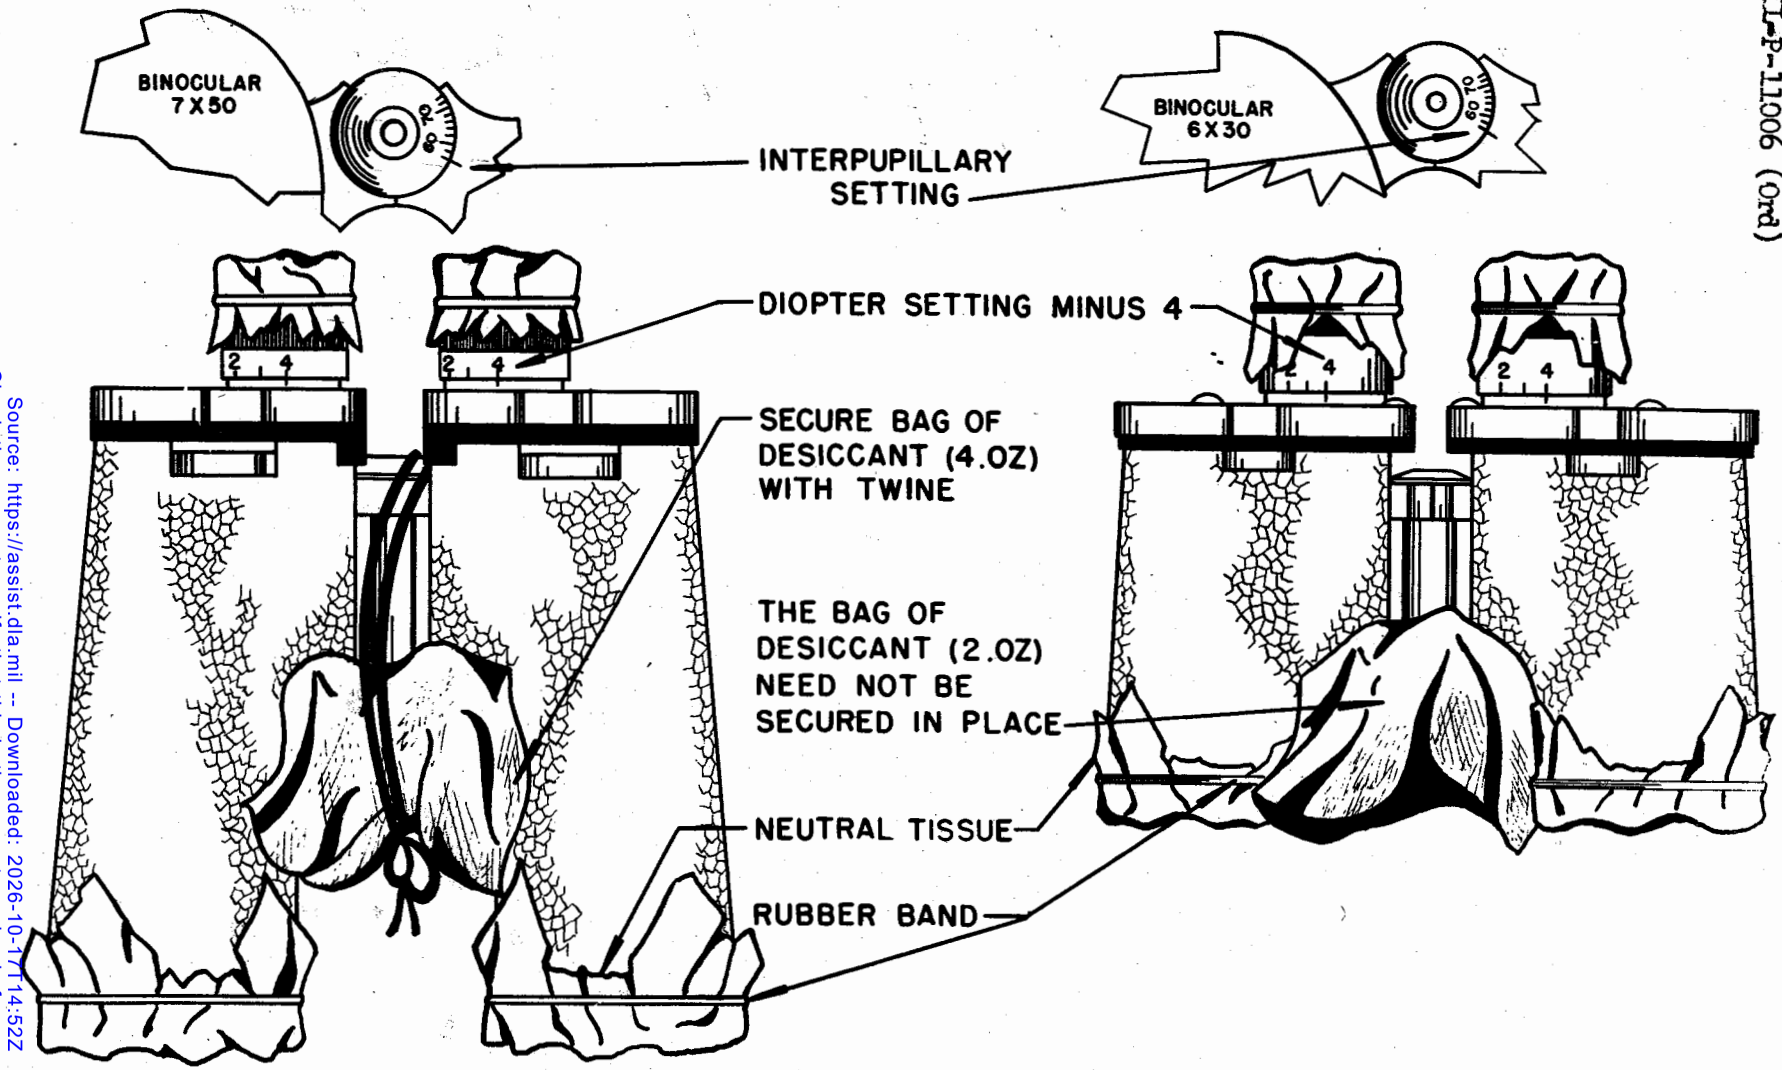



INTERPUPILLARY & DIOPTER SETTINGS
FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

MARKINGS:

ALL DATA TO BE ADDED ON THE CAN SHALL BE LITHOGRAPHED OR STENCILLED ON ONE SIDE OF THE CAN WITH WATER-PROOF BLACK INK. INFORMATION ON THE CAN SHALL BE LEGIBLE.

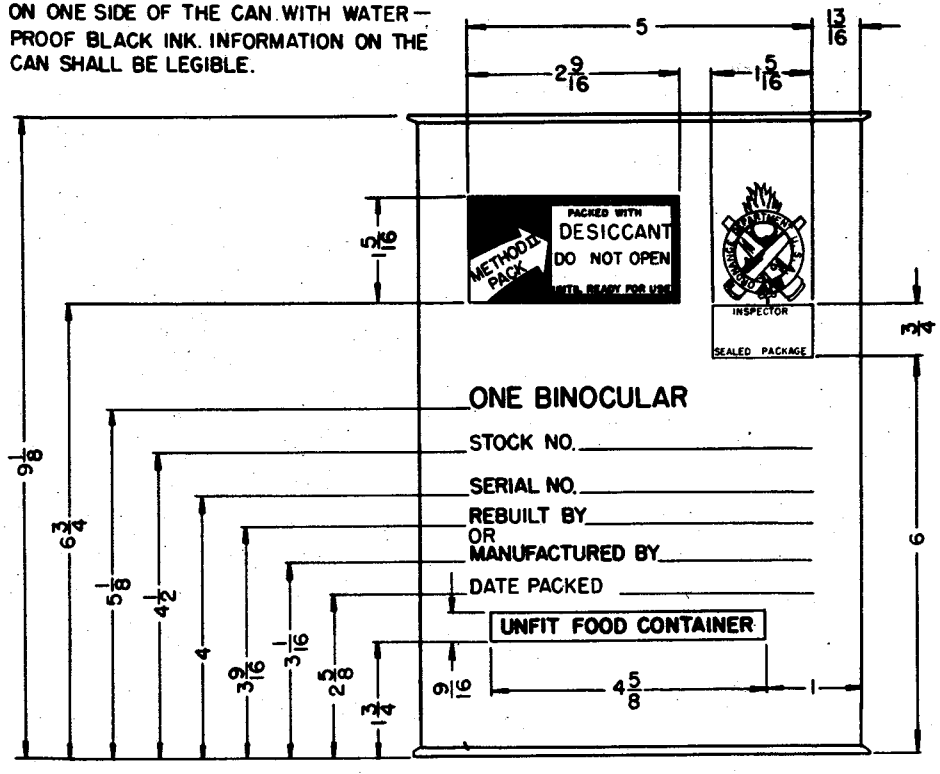

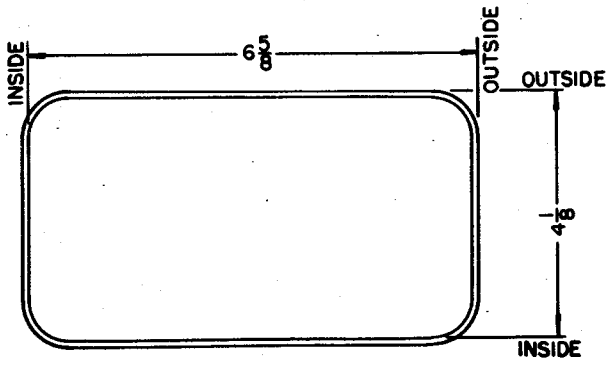

LETTERING:

LETTERS SHALL BE 30 POINT, ANY STYLE, HEAVY CONDENSED FOR "STOCK NO.", "SERIAL NO.", "REBUILT BY OR MANUFACTURED BY," "DATE PACKED" & "UNFIT FOOD CONTAINER" LETTERS FOR "ONE BINOCULAR" SHALL BE 36 POINT, ANY STYLE, HEAVY CONDENSED.

NOTE: EXCEPT FOR LID, CAN IS A STANDARD 2 GAL. OIL CAN.

MATERIAL: MATERIAL SHALL BE 107 POUND BASE & POUND COATED TERNE PLATED STEEL

FINISH: COAT INSIDE & OUTSIDE (INCLUDING TOP & BOTTOM) WITH ENAMEL CONFORMING WITH THE APPLICABLE REQUIREMENTS OF SPECIFICATION TT-E-485

STYLE: SIDE SEAM OF CAN SHALL BE SOLDERED INSIDE WITH TIN LEAD SOLDER. NON-ACID FLUX SHALL BE USED. ENDS SHALL BE COMPOUNDED FOR WATER-PROOF SEAL.

SEALING: THE LID ON EACH CAN (CONTAINING BINOCULAR & CARRYING CASE) SHALL BE SEALED WITH A DOUBLE LOCK SEAM ON A CAN SEAMING MACHINE.


TEST FOR LEAKS: EACH CAN SHALL BE TESTED BY SUBMERSION IN WATER OVER WHICH A VACUUM EQUAL TO 7" OF MERCURY COLUMN SHALL BE APPLIED. LEAKY CANS MAY BE SALVAGED BY SOLDERING. REPAIRS MUST BE FIRST CLASS WORKMANSHIP, TOUCHED UP WITH PAINT, AND MUST PASS THE WATER TEST. IF OVER ONE PERCENT LEAKERS ARE FOUND, THE SEALING PROCEDURE AND THE CONDITION OF THE CANS SHOULD BE CHECKED.


CAN, INTERIOR PACKAGING
FOR 6X30 BINOCULARS
FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.

MARKINGS:

ALL DATA TO BE ADDED ON THE CAN SHALL BE LITHOGRAPHED OR STENCILLED ON ONE SIDE OF THE CAN WITH WATER-PROOF BLACK INK. INFORMATION ON THE CAN SHALL BE LEGIBLE.

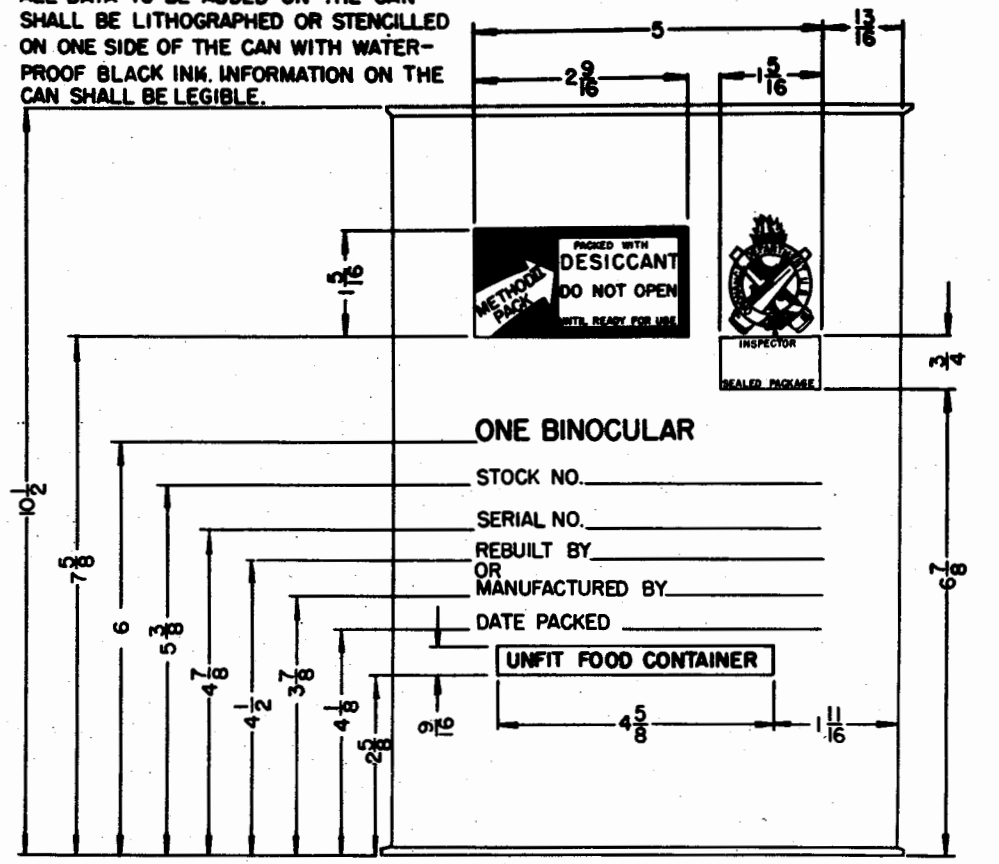

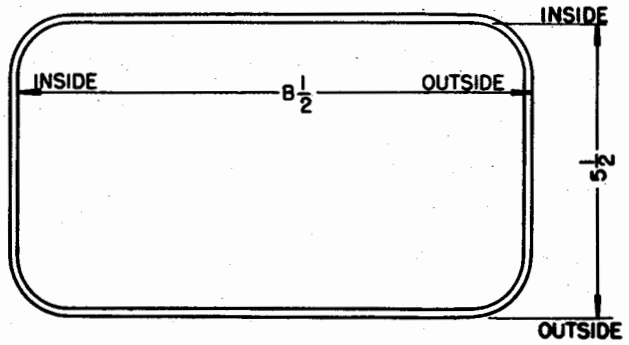

LETTERING:

LETTERS SHALL BE 30 POINT, ANY STYLE, HEAVY CONDENSED FOR "STOCK NO," "SERIAL NO," "REBUILT BY OR MANUFACTURED BY," "DATE PACKED" & "UNFIT FOOD CONTAINER" LETTERS FOR "ONE BINOCULAR" SHALL BE 36 POINT, ANY STYLE, HEAVY CONDENSED.

NOTE: EXCEPT FOR LID, CAN IS A STANDARD 2 GAL. OIL CAN.

MATERIAL: MATERIAL SHALL BE 107 POUND BASE 8 POUND COATED TERNE PLATED STEEL.

FINISH: COAT INSIDE & OUTSIDE (INCLUDING TOP & BOTTOM) WITH ENAMEL CONFORMING WITH THE APPLICABLE REQUIREMENTS OF SPECIFICATION TT-E-485

STYLE: SIDE SEAM OF CAN SHALL BE SOLDERED INSIDE WITH TIN LEAD SOLDER. NON-ACID FLUX SHALL BE USED. ENDS SHALL BE COMPOUNDED FOR WATER-PROOF SEAL.

SEALING: THE LID ON EACH CAN (CONTAINING BINOCULAR & CARRYING CASE) SHALL BE SEALED WITH A DOUBLE LOCK SEAM ON A CAN SEAMING MACHINE.

TEST FOR LEAKS: EACH CAN SHALL BE TESTED BY SUBMERSION IN WATER OVER WHICH A VACUUM EQUAL TO 7" OF MERCURY COLUMN SHALL BE APPLIED. LEAKY CANS MAY BE SALVAGED BY SOLDERING. REPAIRS MUST BE FIRST CLASS WORKMANSHIP, TOUCHED UP WITH PAINT, AND MUST PASS THE WATER TEST. IF OVER ONE PERCENT LEAKERS ARE FOUND, THE SEALING PROCEDURE AND THE CONDITION OF THE CANS SHOULD BE CHECKED.

CAN, INTERIOR PACKAGING
FOR 7X50 BINOCULARS
FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:52Z
Check the source to verify that this is the current version before use.