NOT MEASUREMENT SENSITIVE

MIL-DTL-11132/40D
6 June 1997
SUPERSEDING
MIL-I-11132/40C
17 January 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, GRADE, CADET, SENIOR MASTER SERGEANT, ROTC AND JROTC, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11132 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

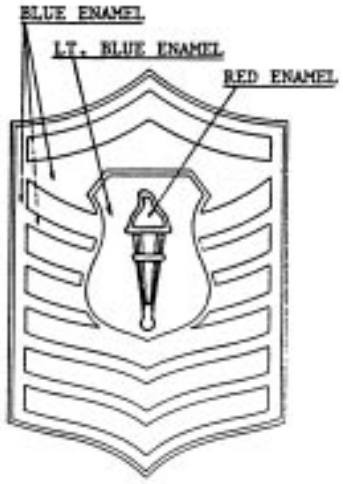

MATERIAL: Gilding Metal

FINISH:
BASE: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
DEVICE: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:
BASE:
HEIGHT (Overall): 1-9/16 inches (3.97 cm) (REF)
WIDTH (Overall): 1-1/16 inches (2.70) (REF)
THICKNESS (Edge): 0.065 inch ± 0.005 inch (0.165 cm ± 0.12 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:22Z
Check the source to verify that this is the current version before use.

DEVICE:
HEIGHT (Overall): 1/2 inch (1.27 cm) (REF)
WIDTH (Overall): 1/8 inch (0.32) (REF)
THICKNESS (Edge): 0.085 inch ± 0.005 inch (0.215 cm ± 0.12 cm)

ASSEMBLED THICKNESS (Thickest Point): 0.150 inch ± 0.010 inch (0.381 cm ± 0.12 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The enamel colors shall match the TIOH color chip numbers listed below:

COLOR	CHIP NUMBER
Red	1
Blue	18
Light Blue	30

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. The device shall be secured to the base by two solid brass rivets 0.035 inch (0.09 cm) minimum in diameter located on the vertical center line of the device.

5. Attaching device shall be prong and clutch type. Prongs shall be attached on the horizontal center line, equidistant from each side and 7/8 inch ± 1/32 inch (2.22 cm ± 0.08 cm) apart.

6. The base may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

7. Acid test for the gold plated device shall not apply.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0894)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:22Z
Check the source to verify that this is the current version before use.