MILITARY SPECIFICATION SHEET

INSIGNIA, GRADE, CADET, CHIEF MASTER SERGEANT, ROTC AND JROTC, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-I-11132.

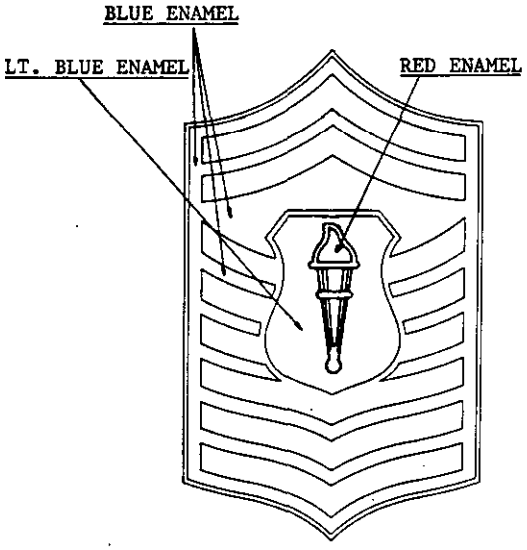

MATERIAL: GILDING METAL

DIMENSIONS (INCHES):
- BASE:
  - HEIGHT (OVERALL): 1-3/4 (REF)
  - WIDTH (OVERALL): 1-1/16 (REF)
  - THICKNESS (EDGE): .065 ± .005
- DEVICE:
  - HEIGHT (OVERALL): 1/2 (REF)
  - WIDTH (OVERALL): 1/8 (REF)
  - ASSEMBLED THICKNESS (AT THICKEST POINT): .150 ± .010

FINISH:
- BASE: ENAMELLED, POLISHED, NICKEL PLATED, RHODIUM PLATED
- DEVICE: ENAMELLED, POLISHED, GOLD PLATED

NOTES:

1. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH. TWO PRONGS SHALL BE ATTACHED ON THE HORIZONTAL CENTERLINE OF THE INSIGNIA, EQUAL DISTANT FROM THE EDGE AND 7/8 ± 1/32 INCH ON CENTERS.
2. THE ENAMEL COLOR SHALL MATCH THE ENAMEL OF THE STANDARD SAMPLES AND THE TIOH COLOR CHIP NO. LISTED BELOW:

COLOR	CHIP NUMBER
BLUE	18
LIGHT BLUE	30
RED	1

3. THE DEVICE SHALL BE SECURED TO THE BASE BY TWO SOLID BRASS RIVETS, .035 INCH MINIMUM IN DIAMETER LOCATED ON THE VERTICAL CENTERLINE OF THE DEVICE.

Custodians:
Army - IH
Air Force - 11
Review activities:
Air Force - 82,99
DLA - CT
User activities:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455 - F267)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T15:22Z
Check the source to verify that this is the current version before use.