NOT MEASUREMENT SENSITIVE


MIL-I-11132/41B
30 January 1991
SUPERSEDING
MIL-I-11132/41A
14 September 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, GRADE; CADET, CHIEF MASTER SERGEANT, ROTC AND JROTC, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-11132.

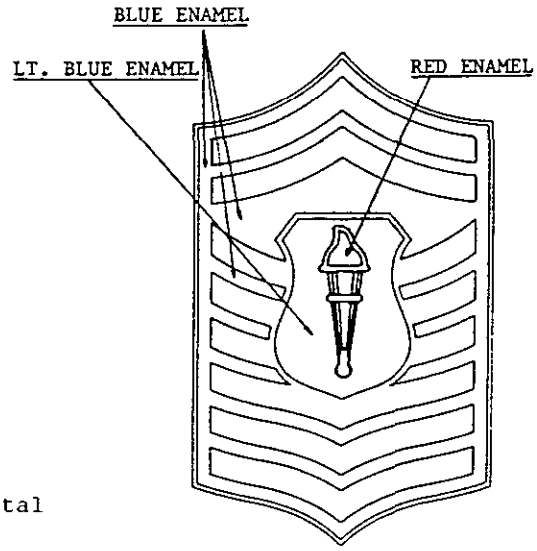

MATERIAL: Gilding metal

DIMENSIONS:
- BASE:
  - HEIGHT (Overall): 1-3/4 inches (4.45 cm) (REF)
  - WIDTH (Overall): 1-1/16 inches (2.70 cm) (REF)
  - THICKNESS (Edge): .065 inch ± .005 inch (0.165 cm ± 0.012 cm)
- DEVICE:
  - HEIGHT (Overall): 1/2 inch (1.27 cm) (REF)
  - WIDTH (Overall): 1/8 inch (0.32 cm) (REF)
  - THICKNESS (At thickest point): .085 inch ± .005 inch (0.215 cm ± 0.012 cm)
- ASSEMBLED THICKNESS (At thickest point): .150 inch ± .010 inch (0.381 cm ± 0.025 cm)

FINISH:
- BASE: Hard enameled, nickel plated, polished.
- DEVICE: Hard enameled, gold plated, polished.

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be attached on the horizontal centerline, equidistance from each side and 7/8 inch ± 1/32 inch (2.22 cm ± 0.08 cm) apart.
2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
Light Blue	30
Red	1

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:22Z
Check the source to verify that this is the current version before use.

3. The device shall be secured to the base by two solid brass rivets, .035 inch (0.088 cm) minimum in diameter located on the vertical centerline of the device.
4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85, and incorporate an ultraviolet inhibitor.
5. The base may be rhodium plated with a mirror-like polished finish at the option of manufacturer.
6. Acid test for the gold plated device shall not apply.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Air Force - 82,99
DLA - CT

(Project No. 8455-xxxx)

User activity:
Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:22Z
Check the source to verify that this is the current version before use.