NOT MEASUREMENT SENSITIVE


MIL-DTL-11132/41G
1 July 2020
SUPERSEDING
MIL-DTL-11132/41F
26 August 2015

DETAIL SPECIFICATION SHEET

INSIGNIA, GRADE, CADET, CHIEF MASTER SERGEANT JROTC, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-I-11132.

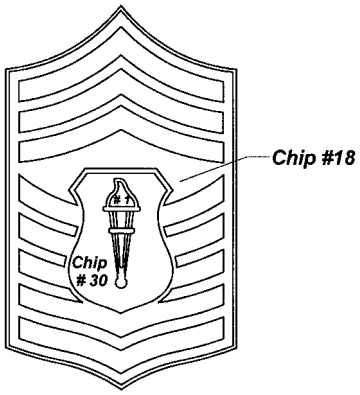

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Epoxy resin (Stoning epoxy), Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
DEVICE: Epoxy resin (Stoning epoxy), 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 6.

DIMENSIONS:
BASE:
HEIGHT (Overall): 1-25/32 inches (REF)
WIDTH (Overall): 1-1/16 inches (REF)
THICKNESS (Edge): 0.065 inch $\pm$ 0.005 inch

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:22Z
Check the source to verify that this is the current version before use.

DEVICE:
HEIGHT (Overall): 1/2 inch (REF)
WIDTH (Overall): 1/8 inch (REF)
THICKNESS (Edge): 0.085 inch ± 0.005 inch
ASSEMBLED (Thickest Point): 0.150 inch ± 0.010 inch

EPOXY: Epoxy resin shall be applied to the insignia grade as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Blue	#18
Red	#1
Light Blue	#30

ATTACHING DEVICE:
1. The device shall be secured to the base by two solid brass rivets 0.035 inch minimum in diameter located on the vertical center line of the device.

2. Attaching device shall be prong and wing type clutch.

3. Prongs shall be attached on the horizontal center line, equidistant from each side and 7/8 inch ± 1/32 inch apart.

NOTES:
1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. The base may be rhodium plated with a mirror-like polished finish at the option of the manufacture.

3. Acid test for the gold plated device shall not apply.

4. The base may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

5. The device shall be secured to the base by two solid brass rivets 0.035 inch minimum in diameter located on the vertical center line of the device.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:22Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11

Review activity:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-2020-361)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:22Z
Check the source to verify that this is the current version before use.