NOT MEASUREMENT SENSITIVE


MIL-DTL-11132/41H
31 August 2026
SUPERSEDING
MIL-DTL-11132/41G
1 July 2020

DETAIL SPECIFICATION SHEET

INSIGNIA, GRADE, CADET, CHIEF MASTER SERGEANT JROTC, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-I-11132.

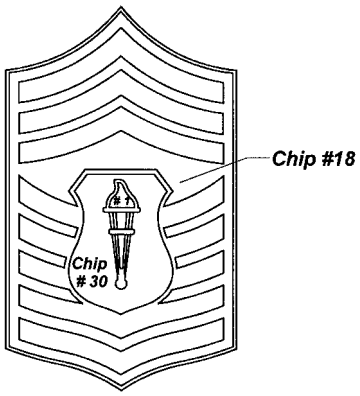

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Epoxy resin (Stoning epoxy), Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
DEVICE: Epoxy resin (Stoning epoxy), 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 6.

DIMENSIONS:
BASE:
HEIGHT (Overall): 1-25/32 inches (REF)
WIDTH (Overall): 1-1/16 inches (REF)
THICKNESS (Edge): 0.065 inch ± 0.005 inch

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:22Z
Check the source to verify that this is the current version before use.

DEVICE:
HEIGHT (Overall): 1/2 inch (REF)
WIDTH (Overall): 1/8 inch (REF)
THICKNESS (Edge): 0.085 inch ± 0.005 inch
ASSEMBLED (Thickest Point): 0.150 inch ± 0.010 inch

EPOXY: Epoxy resin shall be applied to the insignia grade as indicated above and shall match TIOH Hard Epoxy Color Chip Numbers listed below.

TIOH HARD EPOXY COLOR CHIPS	
COLOR	**CHIP NUMBER**
Blue	#18
Red	#1
Light Blue	#30

ATTACHING DEVICE:
1. The device shall be secured to the base by two solid brass rivets 0.035 inch minimum in diameter located on the vertical center line of the device.

2. Attaching device shall be prong and wing type clutch.

3. Prongs shall be attached on the horizontal center line, equidistant from each side and 7/8 inch ± 1/32 inch apart.

NOTES:
1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. The base may be rhodium plated with a mirror-like polished finish at the option of the manufacture.

3. Acid test for the gold plated device shall not apply.

4. The base may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

5. The device shall be secured to the base by two solid brass rivets 0.035 inch minimum in diameter located on the vertical center line of the device.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:22Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-550)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:22Z
Check the source to verify that this is the current version before use.