NOT MEASUREMENT SENSITIVE

MIL-DTL-11132/44A
3 January 2000
SUPERSEDING
MIL-DTL-11132/44
6 June 1997

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, STAR, HONOR UNITS, ROTC AND NDCC, ARMY

Inactive for new design after 19 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11132 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

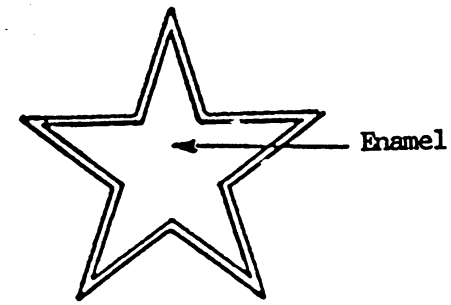

DASH NO.
-1: Blue (Honor Unit)
-2: Yellow (Honor Unit with Distinction)
-3: White (Merit)

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip number 6.

DIMENSIONS:

DIAMETER: 5/8 inch (REF)
THICKNESS (at edge): 0.070 inch ± 0.010 inch

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:23Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enamel colors shall conform to the TIOH Chip numbers listed below:

COLOR	CHIP NUMBER
-1: Blue	30
-2: Yellow	8
-3: White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used, the base material shall be gilding metal or red brass.

4. Attaching device shall be prong with wing-type clutch (as shown by TIOH drawing number B-13-12) and registering prong. The prong and registering prong shall be located on the vertical center line of the device when one star point is up. The prong shall be located 15/64 inch ± 1/64 inch above the bottom edge of the star and the registering prong shall be located 1/8 inch ± 1/64 inch below the tip of the star point. The registering prong shall be 1/8 inch ± 1/64 inch long, 0.045 ± 0.002 inch in diameter and shall be made from any type brass.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-1004)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:23Z
Check the source to verify that this is the current version before use.