NOT MEASUREMENT SENSITIVE

MIL-DTL-11132/45
6 June 1997
SUPERSEDING
MIL-B-14632/4D
12 January 1995

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, RECONDO, ROTC, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11132 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

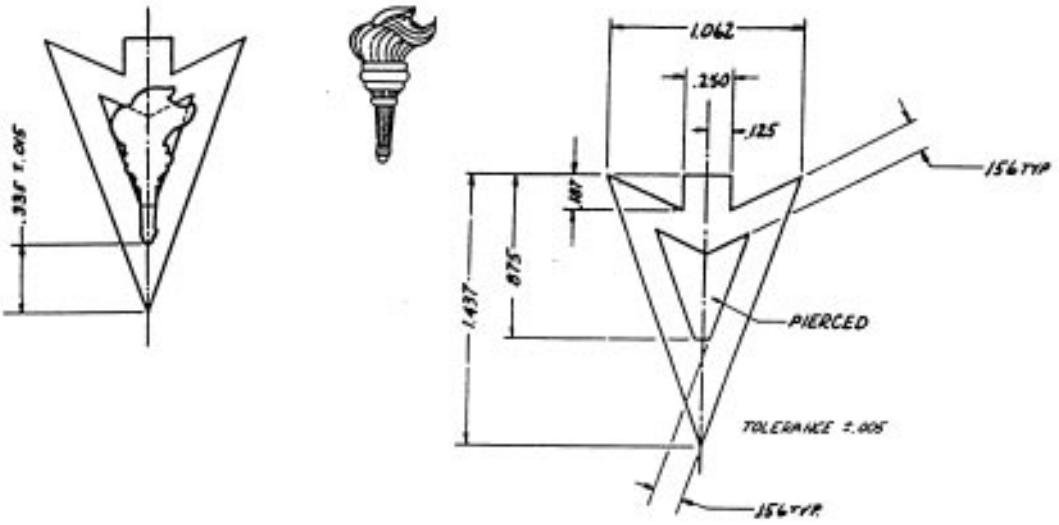

DASH NO.

MATERIAL: Red Brass

-1: Regular
-2: Subdued

FINISH:

-1: Base: Dull Flat Black Enamel.
Device: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

-2: Dull flat black enamel (see note 4).

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:24Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

BASE (See Illustration):
HEIGHT (Base to Tip of Arrow): 1.437 inch (3.11 cm) (REF)
WIDTH (Points of Arrow Side): 1.062 inch (1.02 cm) (REF)
THICKNESS: 0.065 inch ± 0.005 inch (0.165 ± 0.012 cm)

DEVISE:
HEIGHT (Overall): 27/32 inch (2.14 cm) (REF)
WIDTH (Overall): 7/16 inch (1.11 cm) (REF)
THICKNESS (At Thickest Point): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

ASSEMBLED THICKNESS: 0.135 inch ± 0.010 inch (0.343 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The device shall be secured to the base by means of two solid brass rivets. The rivets may be soldered to or be an integral part of the device. The rivets shall be securely peened or swaged to insure a tight fit between components.

3. The dull flat black enamel shall match FED-STD-595, Chip No. 37038.

4. The face and edges of both the base and device for Dash -2 shall be finished with dull flat black enamel as specified. The dull flat black enamel may be applied before or after assembly.

5. The entire badge shall be lacquered after assembly for Dash -1 only.

6. Attaching device shall be prong and clutch type. The prongs shall be located on the vertical center line, equidistant from each end and 1-1/16 inch ± 1/64 inch (2.70 cm ± 0.04 cm) apart.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0895)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:24Z
Check the source to verify that this is the current version before use.