NOT MEASUREMENT SENSITIVE


MIL-DTL-11132/46B
3 June 2020
SUPERSEDING
MIL-DTL-11132/46A
10 August 2015

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, AVIATION, FLIGHT TRANING GRADUATE, ROTC, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-I-11132.

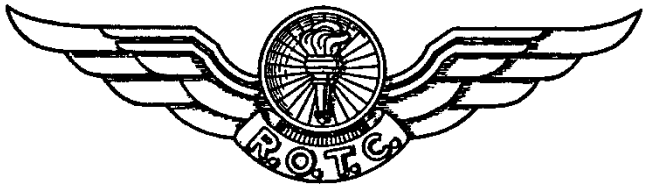

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230) OR Nickel Silver 65/35 (UNS Alloy No.C-752)

FINISH: Nickel Plated, (C-230 only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match The Institute of Heraldry Metal Finish Chip Number 14.

DIMENSIONS:
HEIGHT (Overall): 23/32 inch (REF)
WIDTH (Overall): 2-1/2 (REF)
THICKNESS (Overall): 0.105 inch $\pm$ 0.005 inch

ATTACHING DEVICE:
1. The attaching device shall be prong and wing type clutch.

2. Prongs shall be located on the horizontal line passing through the center of the circle, equidistant from each end and 2 inches $\pm$ 1/32 inch apart.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:24Z
Check the source to verify that this is the current version before use.

NOTES:
1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. A mock forcer may be made used to bring up the design on the circle portion only.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-347)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:24Z
Check the source to verify that this is the current version before use.